
蒼天

SOTEN

Flight Manual

Ver. 3.10-US1

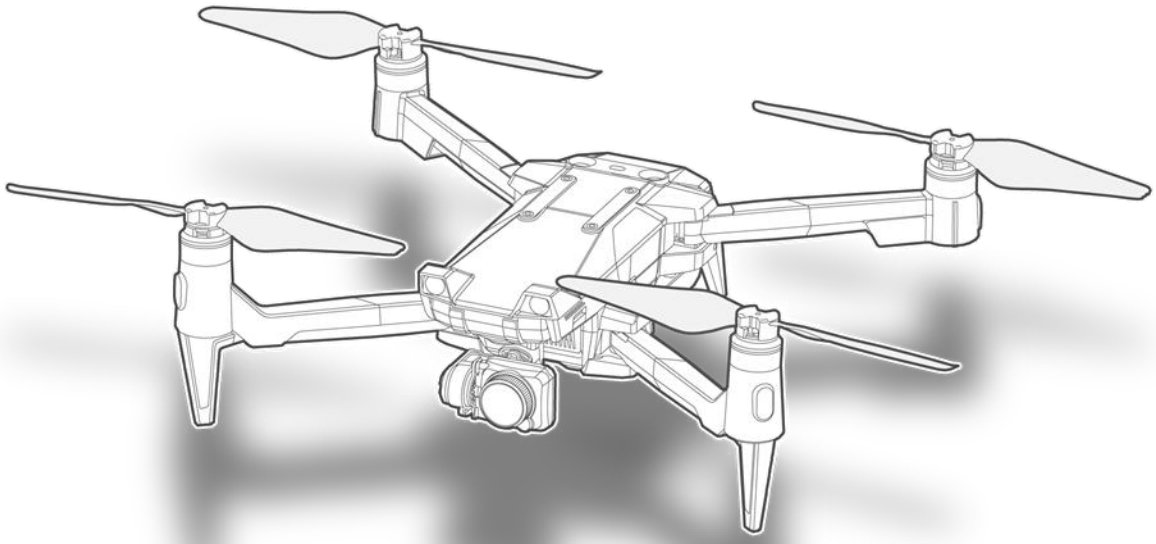

Class 1 Laser Product

ACSL

10/13/2026

Table of Contents

WARNING: Read precautions and entire manual before first use.

Keep manual nearby for future reference by current and future users.

Precautions I

1.1. Introduction 1

1.1.1. Disclaimer 1

1.1.2. Warning 2

1.1.3. Definitions – Classifications of Alert Symbols 3

1.2. Ensuring Safe Use 4

1.2.1. Intended Use 4

1.2.2. Flight Conditions 4

1.2.3. Limitations 5

1.2.4. Firmware Updates 6

1.3. General Precautions 7

1.3.1. Aircraft 7

1.3.2. Battery 8

1.3.3. Battery Charger 9

1.3.4. Controller 10

1.3.5. Soft Equipment Case 11

1.3.6. Water & Dustproof Case 12

1.3.7. Multi Mount Kit 13

1.3.8. Rotor Blade Guard 15

1.4. In-Flight Precautions 17

1.4.1. General Precautions 17

1.4.2. Flight Environment 18

1.4.3. Aircraft 19

1.5. Maintenance, Inspection, Storage, and Transportation Precautions 20

1.5.1. Maintenance and Inspection 20

1.5.2. Storage 20

1.5.3. Disposal 20

1.5.4. Transport 20

1.6. FCC Compliance Statements 21

1.7. Other Notes 22

Product Overview 23

2.1. Product Details 24

2.1.1. Standard Parts 24

2.2. System Configuration 25

2.2.1. System Configuration Conceptual Diagram 25

2.2.2. Functional Overview of Each Wireless System 26

2.3. Aircraft 27

2.3.1. Names of Parts and Functional Overview 27

2.3.2. Overview of the Visual System 29

2.4. Controller 32
2.4.1. Names of Parts and Functional Overview 32
2.4.2. LCD Display 34
2.4.3. SYSTEM Settings Menu: Screen Transition Diagram 36
2.4.4. Status LED Indications 37
2.4.5. Sounds 39
2.4.6. Extended Functionality (HDMI output and mobile device charging) 40
2.5. TAKEOFF Ground Control Application 41
2.5.1. Functional Overview 41
2.5.2. On-Screen Display 41
2.5.3. Key Features 41
2.6. Battery 42
2.6.1. Names of Parts 42
2.6.2. Battery Features 43
2.6.3. Battery Modes 44
2.6.4. Basic Battery Operation 45
2.7. Battery Charger 49
2.7.1. Indications 49
2.8. Standard Camera/Gimbal 50
2.8.1. Standard Camera (visible camera) 50
2.9. RTK Module (Option) 52
2.9.1. RTK-SOTEN 52

First-Time Use 53
3.1. Initial Battery Activation 54
3.2. Installing the TAKEOFF Ground Control Application 55
3.3. Controller Preparation 56
3.4. Aircraft Preparation 57
3.5. First Connection (binding) 60
3.5.1. Aircraft-Side Operation 60
3.5.2. Radio-Controller-Side Operation 60
3.6. Stick Mode Settings 63
3.6.1. Stick Mode Types 63
3.6.2. Changing Stick Mode 65
3.6.3. Confirming Stick Mode 67
3.7. Propeller Installation 69
3.8. Camera Initialization 70
3.9. RTK Settings (Option) 71

Pre-Flight Preparation 74
4.1. Pre-Flight Preparation Items 75
4.2. What You Need for Flight 76
4.3. Battery Charging 77
4.3.1. Charging Method 77
4.3.2. Battery Charging Modes 77
4.4. Controller Charging 79
4.4.1. Charging Method 79

4.4.2. LCD Display While Charging (only when powered on) 80

Pre-Flight Inspection 82

5.1. Pre-Flight Inspection 83
5.2. Pre-Flight Battery Inspection 84
5.2.1. Confirm Level of Charge 84
5.2.2. Inspect Exterior 84
5.3. Pre-Flight Aircraft Inspection 85
5.3.1. Inspect Exterior 85
5.3.2. Inspect Battery Terminals and Locking Mechanism 85
5.3.3. Inspect Camera Terminals and Locking Mechanism 85
5.3.4. Inspect Air Intake 86
5.3.5. Inspect Motors 86
5.3.6. Inspect Propeller Mounts and Arms 87
5.3.7. Inspect Arm Locking Mechanisms 87
5.3.8. Confirm Camera and Battery Lock Status 89
5.3.9. Confirm Flight Conditions/Limitations 89
5.3.10. Inspect Stereo Cameras and Infrared Sensors 89
5.4. Pre-Flight Propeller Inspection 90
5.4.1. Inspect Propellers 90
5.5. Pre-Flight Controller Inspection 91
5.5.1. Confirm Level of Charge 91
5.5.2. Confirm Controller Binding 91
5.5.3. Confirm the Stick Mode 91
5.5.4. Confirm Signal Strength 92
5.5.5. Determine Optimal Antenna Direction 92
5.5.6. Confirm Antenna Position 93
5.6. Pre-Flight Camera Inspection 94
5.6.1. Confirm Startup 94
5.6.2. Confirm Video Transmission 94
5.6.3. Confirm Gimbal Operation 95
5.7. Pre-Flight RTK Inspection (Option) 96
5.7.1. Installation of the RTK-SOTEN Unit 96
5.7.2. Checking the Positioning Status 96

Normal Operating Procedures 98

6.1. Test Run 99
6.1.1. Verify Motor Start and Stop Procedure 99
6.1.2. Verify Correct Magnetic Orientation 100
6.1.3. Magnetic Calibration During Flight 101
6.1.4. Confirm Level of Charge 102
6.1.5. Check the Status LED 104
6.1.6. Install Propellers 104
6.2. Basic In-Flight Operations 105
6.2.1. Flight Mode Settings 105
6.2.2. Basic Manual Mode (MAN) Operations 106
6.2.3. Basic Position Mode (POS) Operations 109

6.2.4. Basic Auto Mode (AUT) Operations 111
6.3. In-Flight Functions 113
6.3.1. Availability of Functions for each Flight Mode 113
6.3.2. Modal Dialog (TAKEOFF Ground Control Application) 114
6.3.3. Auto Takeoff 114
6.3.4. Auto Landing 115
6.3.5. Pause/Resume 115
6.3.6. Directional Pad (D-Pad) 116
6.3.7. Go Home 117
6.3.8. Go to Transmitter 119
6.3.9. Obstacle Avoidance 120
6.3.10. Collision Avoidance 121
6.3.11. Camera/Gimbal Operation 123
6.3.12. Planned Flight 125
6.3.13. 3 User-Defined Geofence 126
6.3.14. Altitude Limitations 129
6.3.15. Emergency Landing Using Ground Control Application 129
6.3.16. Low Battery Emergency Landing 129
6.3.17. Forced Stop 129
6.4. Controller Multicast 130
6.4.1. About Multicast 130
6.4.2. Fail-Safe when Multicasting 131
6.4.3. Switching Pilots 131
6.5. Lesson Mode (Japan only) 132
6.5.1. Setup 132
6.5.2. How to Operate 133
6.6. Regional Market Geofence 135
6.7. RTK Flight (Option) 137
6.7.1. System Overview of Network RTK Positioning 137
6.7.2. Overview of System Functions 137
6.7.3. RTK Flight Precautions 138

Abnormal Operating Procedures 139

7.1. Emergency Procedures for Abnormalities 140
7.1.1. Definition of Terms 140
7.1.2. Manual (MAN) Flight Mode (using the controller) 141
7.1.3. GPS and Visual Odometry Accuracy Degradation 141
7.1.4. Emergency Menu 142
7.1.5. Communications Disruption 144
7.1.6. Emergency Landing Using Ground Control Application 148
7.1.7. Forced Stop Using the Controller 149
7.1.8. Forced Stop Using the Ground Control Application 151
7.1.9. Low-Battery Emergency Landing 152
7.1.10. Degraded GPS Reception in Auto Flight Mode 152
7.1.11. Indications of an Abnormality 154
7.1.12. Stick Calibration 155
7.1.13. Warning Messages 158

7.1.14. Caution Messages 167
7.1.15. Advisory Messages 175
7.1.16. Messages Displayed on the Controller 177

Maintenance, Inspection and Disposal 181
8.1. Post-Flight Inspection 182
8.2. Post-Flight Battery Inspection 183
8.2.1. Clean Battery 183
8.2.2. Confirm Level of Charge 183
8.3. Post-Flight Aircraft Inspection 184
8.3.1. Clean Aircraft 184
8.4. Post-Flight Propeller Inspection 185
8.4.1. Clean Propellers 185
8.5. Post-Flight Controller Inspection 186
8.5.1. Clean Controller 186
8.5.2. Confirm Level of Charge 186
8.6. Storage 187
8.7. Periodic Inspection, Repair and Maintenance 189
8.8. Periodic Parts Replacement 191
8.9. Product Transfer 192
8.10. Disposal and Recycling 193
8.10.1. Disposal of airframe and controller 193
8.10.2. Battery Disposal and Recycling 193

Troubleshooting 194
9.1. Troubleshooting 195
9.1.1. Aircraft Troubleshooting 195
9.1.2. Controller Troubleshooting 197
9.1.3. Battery Troubleshooting 198
9.1.4. RTK-SOTEN (option) Troubleshooting 199

Appendix A 200
A-1 Specifications 201
A-2 Change History 210
Manufacturer Information 211

Chapter 1

Precautions

1.1. Introduction 1
1.2. Ensuring Safe Use 4
1.3. General Precautions 7
1.4. In-Flight Precautions 17
1.5. Maintenance, Inspection, Storage, and Transportation Precautions 20
1.6. FCC Compliance Statements 21
1.7. Other Notes 22

1.1. Introduction

1.1.1. Disclaimer

Please read this disclaimer carefully before using SOTEN. By using this product, you hereby agree that you have read this disclaimer carefully and that you understand, acknowledge and agree to the terms and conditions described herein and elsewhere in the SOTEN User Manual. SOTEN IS NOT A TOY AND IS NOT SUITABLE NOR INTENDED FOR USE BY ANYONE UNDER THE AGE OF 18.

Although SOTEN incorporated sophisticated technologies, inappropriate use of the product may result in personal injury or property damage. Please read this SOTEN User Manual carefully before using the product. The SOTEN User Manual is available at https://acsl-usa.com/support/

The SOTEN User Manual may affect your personal safety and your legal rights and obligations. Failure to read this document in its entirety and following the instructions and warnings may result in product loss/damage, injuries to you and others, and damage to property. It is essential that you read and follow all of the instructions and warnings in this document.

Notwithstanding anything to the contrary in this SOTEN User Manual or otherwise, under no circumstances shall ACSL be liable for any damage(s) or injuries caused to you, to any other party or any property or have any legal responsibility, directly or indirectly, from the use of this product.

When using this product, if you choose to use your own or third-party equipment or service(s) (including, but not limited to, your mobile device or the Google Play Store), review and proceed at your own discretion after confirming the operating instructions and other applicable terms of use for each such related equipment or services. Do not use incompatible equipment or service(s) or alter this product in any way unless authorized to do so by ACSL in writing. Except in cases of ACSL's intentional misconduct or gross negligence or where ACSL has authorized use of the subject equipment or service(s) in writing, ACSL shall not be liable for any damage(s) or injuries caused to you, to any other party or any property, directly or indirectly, arising from or related to such related equipment or service(s).

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAWS, EXCEPT AS EXPRESSLY PROVIDED IN THE APPLICABLE ACSL LIMITED PRODUCT WARRANTY AVAILABLE AT (https://acsl-usa.com/support/), THE PRODUCT (OR COMPONENTS, SOFTWARE OR PARTS THEREOF), PRODUCT ACCESSORIES AND RELATED MATERIALS, AND CONTENT AVAILABLE THROUGH THE PRODUCT ARE PROVIDED "AS IS" AND ON AN "AS AVAILABLE" BASIS, WITHOUT WARRANTY OR CONDITION OF ANY KIND, EITHER EXPRESS OR IMPLIED. ACSL EXPRESSLY DISCLAIMS ALL WARRANTIES OF ANY KIND, EXCEPT AS EXPRESSLY PROVIDED IN THE APPLICABLE ACSL LIMITED PRODUCT WARRANTY, WHETHER EXPRESS OR IMPLIED, RELATING TO THE PRODUCT (OR COMPONENTS, SOFTWARE OR PARTS THEREOF), PRODUCT ACCESSORIES AND ALL RELATED MATERIALS, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, QUIET ENJOYMENT, NON-INFRINGEMENT, FITNESS FOR A PARTICULAR PURPOSE, AND ANY WARRANTY ARISING OUT OF COURSE OF DEALING, USAGE OR TRADE, EVEN IF ACSL HAS BEEN ADVISED OF SUCH

PURPOSE. ACSL DOES NOT WARRANT, EXCEPT AS EXPRESSLY PROVIDED IN THE APPLICABLE ACSL LIMITED PRODUCT WARRANTY, THAT THE PRODUCT (OR COMPONENTS, SOFTWARE OR PARTS THEREOF), PRODUCT ACCESSORIES AND RELATED MATERIALS, WILL BE ERROR-FREE, VIRUS-FREE, UNINTERRUPTED, SECURE, OR FREE OF HARMFUL COMPONENTS OR SOFTWARE, AND DO NOT WARRANT THAT ANY SUCH ISSUES WILL BE CORRECTED.

BY USING THE PRODUCT, YOU HEREBY ACKNOWLEDGE AND AGREE THAT YOU ARE SOLELY RESPONSIBLE FOR AND ASSUME ALL RISKS FOR ANY PERSONAL INJURIES, DEATH, DAMAGE TO PROPERTY OR LOSS OF DATA THAT MAY RESULT FROM YOUR USE OF THE PRODUCT (OR COMPONENTS, SOFTWARE OR PARTS THEREOF), PRODUCT ACCESSORIES AND RELATED MATERIALS. YOU AGREE THAT YOU WILL USE THE PRODUCT AT YOUR OWN DISCRETION AND RISK.

WHEN USING THE PRODUCT (OR COMPONENTS, SOFTWARE OR PARTS THEREOF), PRODUCT ACCESSORIES AND RELATED MATERIALS, YOU MAY PROVIDE ACSL WITH PERSONAL INFORMATION OR DATA. PLEASE REFER TO ACSL'S PRIVACY POLICIES AVAILABLE AT [www.acsl-usa.com/support] FOR MORE INFORMATION.

THIS DISCLAIMER AND OTHER CONTENTS OF THIS SOTEN USER MANUAL MAY BE UPDATED FROM TIME TO TIME IN ACSL'S SOLE DISCRETION. PLEASE VISIT https://acsl-usa.com/support/ OR CONTACT US FOR THE LATEST VERSION OF THIS SOTEN USER MANUAL. THIS DISCLAIMER AND SOTEN USER MANUAL MAY BE MADE AVAILABLE IN VARIOUS LANGUAGES. IF THERE IS ANY CONFLICT BETWEEN ANY TERM OR THE MEANING GIVEN CERTAIN LANGUAGE IN ONE VERSION COMPARED TO THE TERM OR MEANING GIVEN SUCH CORRESPONDING LANGUAGE IN ANOTHER, THE TERM AND/OR LANGUAGE CONTAINED IN THE ENGLISH VERSION SHALL GOVEN.

1.1.2. Warning

- Before using this product, read carefully and fully understand the safety precautions and instructions in this manual.
- Follow the warnings in this manual. Failure to do so may result in personal injury or property damage.
- Do not replace any part of this product without explicit permission from ACSL. In addition to the replacement of parts, any repairs or modifications other than those specified by ACSL are not covered by the warranty.
- During the operational life of this product, perform the pre-flight inspections, repairs, and routine maintenance as specified in Chapter 8: "Maintenance, Inspection and Disposal" .

1.1.3. Definitions – Classifications of Alert Symbols

In this manual, and on the product itself, the following classification of alert symbols is used in conjunction with the headings “WARNING”, “CAUTION” and “ADVISORY”. These symbols are deployed to ensure safe and proper use of the product and to prevent property damage and injury to the user or to others.
The symbols and their meanings are shown below. Please read carefully and understand the meaning of each.



This symbol is the safety alert symbol.
This symbol is used to alert you to hazards that could potentially harm people.
To avoid possible injury or death, follow all safety instructions that follow this symbol.



WARNING

This symbol indicates that failure to follow the associated guidance could result in death or serious injury.



CAUTION

This symbol indicates that failure to follow the associated guidance could result in minor or moderate injuries.



ADVISORY

This symbol indicates that failure to follow the associated guidance could result in malfunction or failure of the product, which could cause damage to other property.

The following symbols illustrate prohibited or required actions.

	**Prohibited Actions** The associated actions should not be done.
	**Required Actions** The associated actions must be done.

1.2. Ensuring Safe Use

1.2.1. Intended Use

- SOTEN is an unmanned aircraft designed specifically for industrial/official use, not for general consumer use.
- SOTEN's intended use is to be flown manually by an experienced pilot, or autonomously along a planned route using the controller and the ACSL TAKEOFF ground control application.

1.2.2. Flight Conditions

- The table below lists common flight conditions and the suitability of SOTEN for those conditions.
- The user must comply with all local and national laws regarding the flight of unmanned aircraft.
- Purchase of liability insurance to protect the user against the occurrence of bodily injury to persons and damage to property is strongly recommended prior to using SOTEN. It is also strongly recommended that the user purchase property insurance.

Flight Scenario		Suitability
1	Manual flight within visual line of sight	Yes (excluding no-fly zones)
2	Autonomous flight within visual line of sight	Yes (excluding no-fly zones)
3	Flight beyond visual line of sight	Only with proper permission (check pertinent laws)
4	Daylight flight	Yes
5	Night flight	Only when properly equipped and with proper permission (check pertinent laws)
6	Good GPS reception	Yes[1]
7	No/Poor GPS reception	Yes[2]
8	Flying in a strong electromagnetic field	No[3]
9	Flying in precipitation	No[4]
10	Flying in icing conditions	No

CAUTION

1 Must continuously monitor GPS reception during flight.
If GPS reception becomes poor, immediately switch to manual (MAN) mode to continue safe flight.

2 SOTEN is capable of flight in position (POS) mode even with poor or no GPS signal reception using the three on-board stereo cameras. However, flight may become unstable depending on the lighting conditions and scenery, especially in environments with poor or extremely bright lighting, reflective or low-contrast scenery, a lot of moving scenery, or a lack of close scenery. Be prepared to switch to manual (MAN) mode immediately if you notice anything unusual or if motion becomes erratic.

3 Be careful not to use SOTEN in areas with strong interference from other wireless devices. Do not fly near areas with electromagnetic interference. In particular, areas around high-voltage power lines, cellular base stations, and radio towers are likely to be sources of electromagnetic

interference, which may cause instability or disruption of the communications between the aircraft and the controller that are necessary for safe maneuvering. If communication between the aircraft and the controller becomes unstable, discontinue the use of nearby Wi-Fi devices.

4 The main body of the aircraft (with the camera and battery installed) is dustproof and waterproof equivalent to IP43, but if rain or fog is observed or anticipated during flight, abort the flight.

1.2.3. Limitations

- Use of SOTEN must comply with the limits specified below.

Item	Min.	Max.
Takeoff weight	-	2.0 kg (4.4 pounds)
Airspeed	-	15 m/s (33.5 MPH)
Density altitude[1]	-	2,000 m (6,600 ft)
Maximum wind speed	-	10 m/s (22 MPH)
Operating ambient temperature	-20°C[3] (-4°F[3]) (conditional)	40°C (104°F)
2.4 GHz communication distance	-	4 km[2] (2.5 miles[2])

CAUTION

1 Density altitude is the equivalent altitude above sea level at international standard atmospheric pressure and temperature (1013.25 hPa, 15°C). Density altitude varies from geodetic altitude with atmospheric pressure and temperature. In general, high temperature and lower pressure weather will result in a density altitude that is higher than the geodetic altitude.

2 Communication distance is not guaranteed. Communication distance varies depending on the surrounding environment and level of electromagnetic interference in the vicinity. Continuously monitor the strength of the communications between the aircraft and the controller during flight.

3 The amount of energy that can be supplied from the battery is lower when used at low ambient temperatures compared to normal ambient temperatures. Please be aware of the following points when operating at low ambient temperatures:

- The battery level will decrease faster, and the flight time will be shorter than when flying in a normal ambient temperature. Please be aware of battery consumption and continuously monitor the battery level indicator during flight.
- The maximum power the battery can produce decreases with its internal temperature. At low temperatures, the battery may not be able to provide enough power to sustain high-speed flight against strong winds or to perform abrupt maneuvers. When flying in low ambient temperatures, consider using lower airspeed and wind speed limits than those specified in Section 1.2.3, and avoid abrupt maneuvers.
- To prevent the battery temperature from falling below 20°C (68°F), place the battery in a location with a heating system to warm up the battery before use. Avoid direct exposure to hot air from heating equipment, etc.
  (A battery should not be used if it's left in low ambient temperature.)

1.2.4. Firmware Updates

Use the latest firmware. The aircraft and controller firmware can be updated through the ACSL TAKEOFF ground control application to improve performance and add new features. Check the ACSL website or your dealer for the latest information.


The latest version of the ACSL TAKEOFF ground control application includes all fixes from previous versions, so updating the firmware with the latest version of TAKEOFF will bring the aircraft and controller up to date. It is not necessary to update a aircraft and/or controller with previous versions of TAKEOFF.

Refer to the ACSL TAKEOFF ground control application User Manual for information on how to update such out-of-date firmware.

1.3. General Precautions

1.3.1. Aircraft

Familiarize yourself with the orientation of the aircraft (which side is front and which side is rear) to avoid maneuvering in the wrong direction.

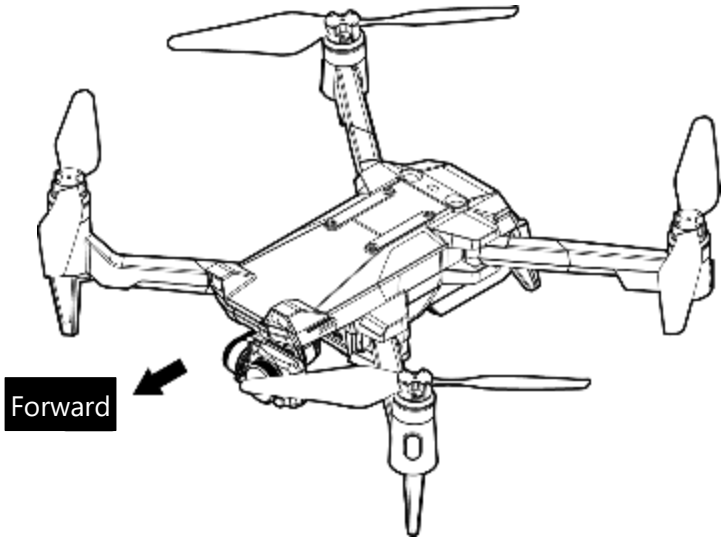

Class 1 Laser Product

WARNING

	Do not touch the aircraft or battery terminals with wet hands. Doing so may result in electric shock.
	Do not disassemble or modify the aircraft in any way. Doing so may result in fire, damage, malfunction, or electric shock.
	Do not look near the two infrared sensors located on the top and bottom of the aircraft when it is powered on. Lasers operating with a wavelength outside the visible range (class 1 lasers) are emitted when the aircraft is powered on.
	Do not touch the motors immediately after flight. Doing so may result in burns, as the motors heat up significantly during flight.
	The propellers are sharp. Be careful when attaching and removing the propellers to avoid cutting your hands or body with the sharp ends.
	Japan only: Due to recent regulatory changes, the use of SIM cards may be restricted to those exclusively for use in unmanned aircraft. Please confirm and comply with the latest regulations. (LTE-equipped models only)

1.3.2. Battery

WARNING

	**Handle the battery carefully to avoid damage or leakage.** Failure to do so may result in injury.
	**Do not disassemble the battery.** Doing so may cause fire or the release of toxic substances.
	**Do not use an unsuitable battery type.** Doing so may cause fire.
	**Do not drop the battery into water or splash water onto it.** Doing so may cause overheating or fire. **(In an emergency it is acceptable to douse the battery with water to prevent starting or spreading fire. See the "Precautions to prevent the spread of fire" below.)**
	**Do not short circuit the battery.** Doing so may cause overheating or fire.
	**Do not heat battery to high temperatures (>60°C or >140°F) or incinerate.** Doing so may cause an explosion or burns.
	**Do not use or charge the battery if the aircraft has been subjected to a severe shock, such as a crash or a hard landing after free fall.** Doing so may cause overheating or fire.
	**Do not mount, use, or charge a battery with bulges, breaks, cracks, holes, or deformities.** Doing so may cause overheating, fire, damage, or malfunction.
	**Do not charge, store, or leave the battery in high temperatures, high humidity, places exposed to water, or in a car under the hot sun.** Doing so may cause overheating, fire, damage, or malfunction.
	**Do not charge the battery immediately after the flight. Delay charging until after the battery has cooled down to room temperature.** The battery may be hot immediately after flight, and charging may further increase temperature and may cause overheating or fire.
	**Please dispose of used batteries properly according to the disposal method specified by your local government.** Contact your dealer for recycling of batteries with remaining useful life.

WARNING

Precautions to prevent the spread of fire:

- When using SOTEN, take necessary measures such as having an appropriate fire extinguisher* nearby in case of fire caused by damage to the battery.
  *ABC powder fire extinguishers are recommended.

1.3.3. Battery Charger

WARNING

	**Do not touch or unplug the charger with wet hands.** Doing so may result in electric shock.
	**Do not drop the charger or subject it to vibration, shock, or deformation.** Doing so may cause fire or malfunction.
	**Do not operate, store, or leave the charger in high temperatures, high humidity, places exposed to water, or in a car under the hot sun.** Doing so may cause fire, damage, or malfunction.
	**Do not touch the charger for long periods of time while charging the battery.** Doing so may result in burns.
	**Do not connect the charger to or use it with devices other than those specified.** Doing so may cause overheating, fire, damage, or malfunction.
	**Do not connect the included power cord to other devices.** Doing so may result in malfunction, electric shock, or fire.
	**Do not cover the charger with blankets or other covers while charging a battery.** Doing so may cause excessive heat buildup resulting in fire or malfunction.
	**Do not disassemble or modify the charger in any way.** Doing so may cause fire, damage, malfunction, or electric shock.
	**Do not connect the charger to an electrical outlet or battery with condensation on it.** Doing so may cause fire, damage, malfunction, or electric shock.
	**Do not allow foreign matter such as dust or dirt to contact the charger terminals.** Doing so may cause overheating, fire, damage, malfunction, or electric shock.
	**Do not use flammable aerosols or sprays on or in the vicinity of the charger.** Doing so may result in fire or explosion.
	**Do not allow other metallic objects (tools, jewelry, etc.) to contact or short-circuit the charger terminals.** Doing so may result in malfunction, electric shock, or fire.
	**Do not use the charger with an excessive number of extension cords, power strips, etc.** Exceeding the current rating of the electrical wiring may cause fire.
	**Unplug the charger from the outlet when not in use for an extended period.** Power leakage due to deterioration over time may cause a fire.
	**The ground terminal of the power cord must be connected to a ground wire.** Failure to do so may cause electric shock.
	**When using an extension cord, check its user manual and current rating.** Exceeding the current rating of the extension cord may cause fire.
	**If you notice any abnormality, unplug the charger immediately.** Failure to do so may cause electric shock, malfunction, overheating or fire.

1.3.4. Controller

WARNING

	**Do not heat the controller, use it near a fire, or incinerate.** Doing so may cause overheating, ignition, damage, or malfunction.
	**Do not drop the controller or subject it to vibration, shock, or deformation.** Doing so may cause fire or malfunction.
	**Do not charge, store, or leave the controller in high temperatures, high humidity, places exposed to water, or in a car under the hot sun.** Doing so may cause fire, damage, or malfunction.
	**Do not use or charge the controller if it is swollen, damaged, cracked, punctured, or deformed.** Doing so may cause overheating, fire, damage, or malfunction.
	**Do not connect the controller to or use it with equipment other than that specified.** Doing so may cause overheating, fire, damage, or malfunction.
	**Do not drop the controller into water or splash water onto it.** Doing so may cause fire, damage, or malfunction.
	**Do not disassemble or modify the controller in any way.** Doing so may cause fire, damage, malfunction, or electric shock.
	**Do not connect the controller to a battery or an electrical outlet or with condensation on it.** Doing so may cause fire, damage, malfunction, or electric shock.
	**Do not allow foreign matter such as dust or dirt to contact the controller terminals.** Doing so may cause overheating, fire, damage, malfunction, or electric shock.
	**Do not allow the terminals of the controller to get dirty or wet.** Doing so may cause fire, damage, malfunction, or electric shock.
	**Do not use or charge the controller if it has been dropped or has been deformed.** Doing so may cause overheating, fire, damage, malfunction, or electric shock.
	**Do not allow other metallic objects (tools, jewelry, etc.) to contact or short-circuit the controller terminals.** Doing so may result in malfunction, electric shock, or fire.

1.3.5. Soft Equipment Case

Safety Precautions

- Soft Equipment Case Instruction Manual for L14-N81LA-10 -

This product is a backpack-type soft carrying case that can hold the SOTEN industrial drone. When actually using the product, please read the instruction manual of the equipment to be stored in the case carefully and use it correctly according to the contents of the manual.

Specification	
External dimensions	W16.7 x D14.9 x H9.4 inch
Net weight	4.4lbs
Recommended storage temperature	14 ~ 140 °F

**Please note that these are the recommended storage temperatures for the case itself, and when storing devices, please pay attention to the recommended storage temperatures specified for each device.


WARNING

Please be careful not to pinch cords when storing
This may cause not only malfunctions such as wire breakage, but also heat generation, ignition, and leakage of electricity from the cable.

Do not store dropped, submerged, or broken batteries
Interior materials are noncombustible and may cause fire spread in the event of ignition.

When storing batteries, do not leave them in extremely hot environments such as inside a car during the summer
If the case is continuously exposed to direct sunlight in an environment with high ambient temperatures outside the case, the internal temperature will become very hot, which may lead to battery ignition.

Product dimensions

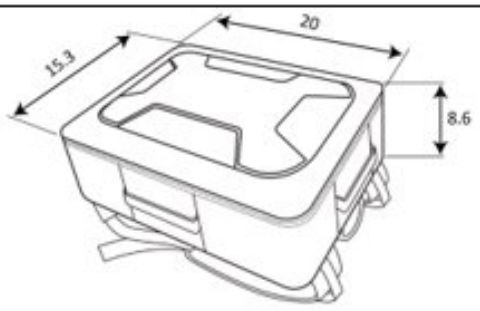

Unit: inch

1.3.6. Water & Dustproof Case

Safety Precautions

- Water & Dustproof case instruction manual for L14-N81LA-00 -

This product is a waterproof and dustproof hard case (IP67) that can accommodate the SOTEN industrial drone. Please read the instruction manual of the equipment to be stored in the case carefully before actual use, and use the case correctly according to the contents of the manual.

Specification	
External dimensions	W20 x D16.5 x H8.5 inch
Net weight	9.7lbs
Recommended storage temperature	14 ~ 140 °F

**Please note that these are the recommended storage temperatures for the case itself, and when storing devices, please pay attention to the recommended storage temperatures specified for each device.

WARNING


Do not store dropped, submerged, or broken batteries
Interior materials are noncombustible and may cause fire spread in the event of ignition.

Please be careful not to pinch cords when storing
This may cause not only malfunctions such as wire breakage, but also heat generation, ignition, and leakage of electricity from the cable.

When storing batteries, do not leave them in extremely hot environments such as inside a car during the summer
If the case is continuously exposed to direct sunlight in an environment with high ambient temperatures outside the case, the internal temperature will become very hot, which may lead to battery ignition.

Do not leave the case open in strong winds or in unstable places
The top cover of the case may close too vigorously, resulting in injury such as pinching of fingers.

Product dimensions

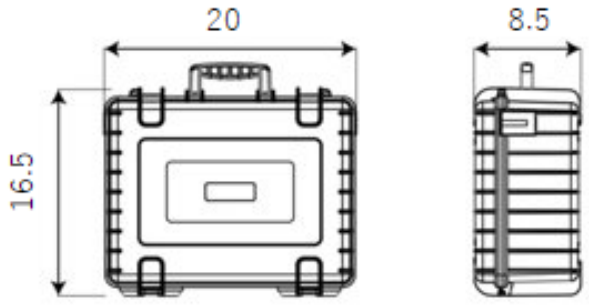

Unit: inch

1.3.7. Multi Mount Kit

Safety Precautions

- Multi Mount Kit Instruction Manual for L14-5150A-00 -

This product is an optional part with high internal risk as described on the face of this document. When using this product, strictly observe the prohibitions and precautions indicated in this manual in order to prevent harm to the user or third parties or damage to property due to malfunction, malfunction, or runaway caused by improper use.

General Precautions

⚠ WARNING ⚠

Do not install payloads (devices) other than those specified by us
Do not fly with equipment which we have not approved to be mounted on the SOTEN. Before using it, be sure to read the instruction manual on our website carefully to make sure that it is a device we allow to be mounted on the aircraft.

As stated in the "Disclaimer" on the front page of this document, we are not responsible for any events that may occur with aircraft carrying payloads other than those specified.

⚠ WARNING ⚠

Before flight, make sure the payload does not hit the rotor blades. The aircraft may crash.


⚠ WARNING ⚠

Maximum Takeoff Weights : 4.4lbs
"Maximum takeoff weight" is the total takeoff weight allowed by the aircraft, which is the sum of the aircraft SOTEN weight and all payloads. When installing equipment that we have approved, please be sure to measure the total weight before the flight.

WARNING

If any strings, tapes, optional equipment cases, or other accessories are attached to our specified equipment, be sure to remove them before loading the equipment into the aircraft.

The aircraft may malfunction if the obstacle camera/TOF sensor moves within its detection range, or if the specified equipment is equipped with accessories which operation has not been confirmed by us.

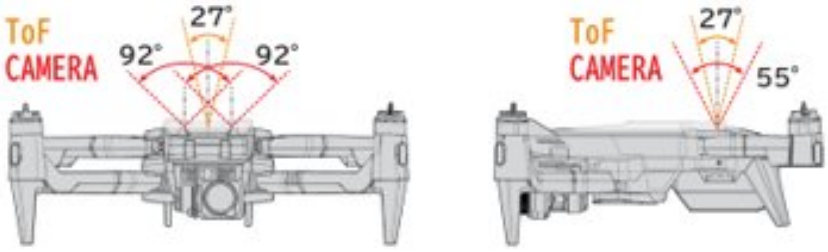

WARNING

Always check that the payload is adequately secured before flight

May lead to payload drop or aircraft crash

Do not greatly exceed the recommended torque when fastening to the aircraft

Not only may the aircraft be damaged, but also the payload may fall or the aircraft may crash

Do not store or leave in high temperatures, high humidity, in places exposed to water, in direct sunlight, or in a car in the hot sun.

Deterioration may lead to payload drop or aircraft crash

No payloads with external damage, cracks, holes, or deformation

May lead to payload drop or aircraft crash

Please make sure to read before use

This product has the highest internal risk of all SOTEN optional parts. Please read the latest Multi Mount instruction manual carefully and take safety into consideration before actual use.

1.3.8. Rotor Blade Guard

Safety Precautions

- Rotor Blade Guard Instruction Manual for L14-45329-00 -

This product is an optional part for "objective contact only" as described on the surface of this document. To prevent injury to the user or third parties or damage to property due to the dropping of the aircraft or property (this product) as a result of improper use, please strictly observe the following prohibitions and precautions when using this product.

General Precautions

⚠ WARNING ⚠

Always check that the payload is adequately secured before flight May lead to payload drop or aircraft crash	**Do not fly with the maximum takeoff weight exceeded** May lead to aircraft crash or flyaway
Do not store or leave in high temperatures, high humidity, in places exposed to water, in direct sunlight, or in a car in the hot sun. Deterioration may lead to payload drop or aircraft crash	**Do not equip or fly this product with any external damage, cracks, holes, or deformation.** May lead to payload drop or aircraft crash
Do not allow the aircraft body to approach any person or persons even with this product attached. There is a risk of a serious accident when the aircraft body and the object come into contact with each other	**Do not use in locations where wind direction changes significantly** External forces beyond the design assumptions may cause the aircraft to lose balance and crash.

⚠ WARNING ⚠


Maximum Takeoff Weights : 4.4lbs


"Maximum takeoff weight" is the total takeoff weight allowed by the aircraft, which is the sum of the aircraft SOTEN weight and all payloads. When installing equipment that we have approved, please be sure to measure the total weight before the flight.

As stated in the "Disclaimer" on the front page of this document, we take no responsibility for any damage to property, injury to the human body, or any other disadvantages that cannot be mitigated or prevented by this product.

Be sure to check that the product and the fuselage are properly fastened at the four locking points indicated by the symbols (★) in the figure below. (Please refer to the instruction manual for detailed disassembly and installation of this product.

▲ : Disassemblable parts
★ : Locking points

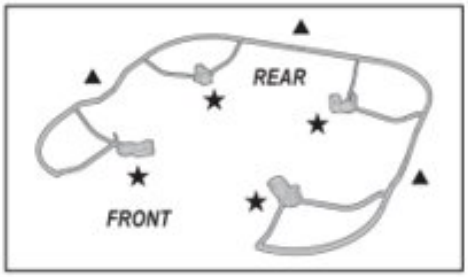

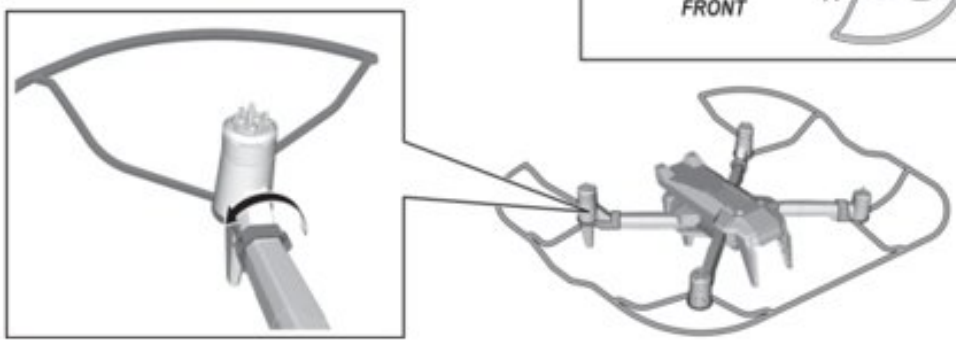

This product is designed so that it cannot be mounted in the wrong direction. Attempting to force the product in the wrong direction may result in damage to the aircraft or this product.

⚠ WARNING ⚠

This product is not intended to prevent injury to humans or animals.
This product is an optional part designed to reduce damage when the aircraft accidentally comes into contact with property, etc., and to reduce damage to the main body of the aircraft. It is not intended to reduce damage or prevent serious accidents from occurring when the aircraft comes into contact with humans or other living organisms. (The same safety precautions are required when the product is installed as when it is not installed.

Please make sure to read before use

Incorrect installation of this product may cause the aircraft to crash or the property (this product) to fall. Please read the instruction manual carefully and pay sufficient attention to safety before actual use.

1.4. In-Flight Precautions

1.4.1. General Precautions

- Pilots should wear helmets, protective goggles, long sleeves, and long pants. In addition, an emergency evacuation area should be designated in advance.
- The flight area must be kept clear of people, including pilots, and third-party property.
  *Japan only: A flight permit is required when flying within 30 meters of third-party people or property.




- When the motors start, the propellers rotate, which may cause cuts, amputations, or fractures. The pilot should make sure that no one is within 5 meters (15 feet) of the aircraft before starting the motors.
- Never allow anyone to come between the pilot and the aircraft.
- Provide an adequate airspace buffer around personnel involved in the flight operations, including pilots and observers, to ensure that people not involved cannot inadvertently approach the pilot and interfere with the flight operations.
- While in operation. ensure that the propellers do not touch the ground or any structure. Failure to do so may cause a serious accident, injury, death, or property damage.
- Beware of collisions with power lines, trees, birds, and other aerial objects. A serious accident may result in injury or property damage.

1.4.2. Flight Environment

- Be sure to check the current weather conditions and forecasts before flying to avoid exceeding the flight conditions and limitations specified in Section 1.2: "Ensuring Safe Use."
- If weather conditions deteriorate, such as sudden rain, lightning or fog, the flight should be terminated immediately.

ADVISORY

- Depending on the surrounding environment, GPS signals may be reflected by obstacles, causing the aircraft to operate erratically.
- In places where radio waves are easily reflected or diffracted by obstacles such as buildings or terrain, a phenomenon called "multipath reception" may occur. Multipath reception can cause an error of several meters to dozens of meters in the measured position of the aircraft by the GPS receiver, which could result in a collision with an obstacle or a crash. Avoid flying in such areas.
- Indication of poor GPS reception on the controller or ground control application, or abnormal attitude or motion of the aircraft may indicate multipath reception. Pay close attention to the behavior of the aircraft and the GPS signal strength indications during flight. If you notice any abnormalities, switch to manual (MAN) mode and land the aircraft immediately.

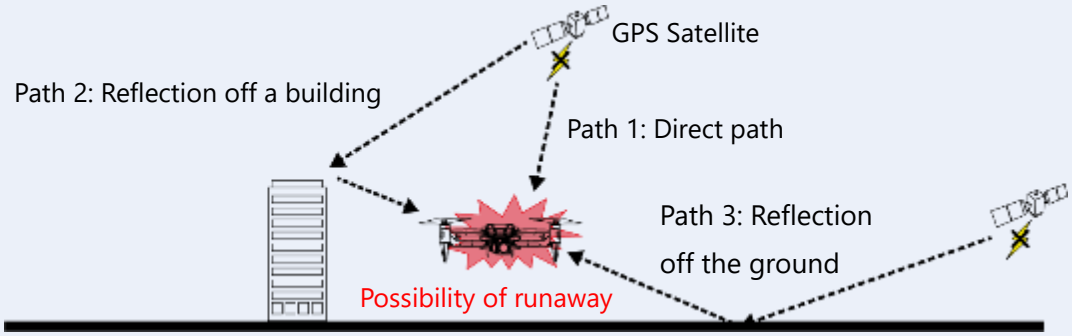

- SOTEN is capable of position mode flight even with poor or no GPS signal reception using the three on-board stereo cameras. However, flight may become unstable depending on the lighting conditions and scenery, especially in environments with poor or extremely bright lighting, reflective or low-contrast scenery, a lot of moving scenery, or a lack of close scenery. Be sure to be able to switch to manual flight mode immediately if you notice anything unusual or if motion becomes erratic.

➔ See Section 2.3.2: "Overview of the Visual System."

- Be careful not to use SOTEN in areas with strong interference from other wireless devices. Do not fly near areas of electromagnetic interference. In particular, areas near high-voltage power lines, cellular base stations, and radio towers are likely sources of electromagnetic interference, which may cause instability or interruption of communication between the aircraft and the controller necessary for safe maneuvering. If communication between the airplane and the controller becomes unstable, discontinue the use of nearby Wi-Fi devices. Ensure that you do not exceed the flight conditions and limitations specified in Section 1.2: "Ensuring Safe Use."

1.4.3. Aircraft

- Takeoffs and landings should be made on a flat, level surface.
- Before powering on, place the aircraft on a flat, level surface.
- During startup, do not bump or tilt the aircraft until startup is complete as this may interfere with the startup calibration of the on-board sensors.
- Do not leave the aircraft unattended with the battery connected.
- A caution message will be displayed if the internal temperature of the aircraft rises above 65°C (149°F). Keep the aircraft in the shade, out of direct sunlight. See Section 7.1.14: "Caution Messages."
- After landing, first shut the aircraft down, then move it to a safe place.
- The status LED will blink white or red when a sensor error, poor GPS reception, or other abnormal condition occurs. If the LED blinks white, an abnormality has been detected in the aircraft, and the flight should be terminated immediately.
  *For other details, see Section 6.1.5: "Check the Status LED."104



- Do not exceed the maximum takeoff weight. The aircraft may not be able to maintain safe flight, which could result in injuries or property damage.



- Do not perform a hand catch or hand release. The aircraft may behave unexpectedly due to a disturbance or mishandling, which may result in injury.
- Do not touch the motors immediately after flight. Doing so may result in burns, as the motors heat up significantly during flight.

1.5. Maintenance, Inspection, Storage, and Transportation Precautions

1.5.1. Maintenance and Inspection

- Perform maintenance inspections according to the instructions in Chapter 8 “Maintenance, Inspection and Disposal”.
- Perform the periodic replacement of parts according to the instructions in Section 8.8 “Periodic Parts Replacement.”
- If the aircraft crashes or otherwise suffers a strong impact during flight, contact your dealer.

1.5.2. Storage

- If the aircraft is dropped or otherwise subjected to a strong shock during storage, contact your dealer.
- Store SOTEN in a locked area.
- Refer to Section A-1-1 “Specifications” for the storage conditions for each component of SOTEN.
- If SOTEN is stolen, it may be used for illegal or unsafe nefarious purposes. Customers are requested to make every effort to prevent theft. In the event that SOTEN is stolen, promptly file a report with the local police and contact your dealer.

1.5.3. Disposal

- When disposing of SOTEN, refer to Section 8.10 “Disposal and Recycling”. Comply with all local rules.

1.5.4. Transport

- Transport SOTEN in a storage case to avoid strong shocks to the aircraft, controller, camera, propellers, or batteries.
- Make every effort to prevent theft of this product during transportation. In the event that SOTEN is stolen, promptly file a report with the local police and contact your dealer.



If SOTEN is transported with the camera attached to the aircraft, unintentional shocks to the camera may cause contact failure at the points that it contacts the aircraft. Always remove the camera from the aircraft for storage or transportation.

1.6. FCC Compliance Statements

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

SOTEN (L14)
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

ACSL, Inc.
710 Lakeway Drive, Suite 200, Sunnyvale, CA 94085
https://acsl-usa.com/contact/

FCC CAUTION
Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

This aircraft complies with FCC radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure Guidelines. This equipment should be installed and operated keeping the radiator at least 20cm or more away from person's body.

The available scientific evidence does not show that any health problems are associated with using low power wireless devices. There is no proof, however, that these low power wireless devices are absolutely safe. Low power wireless devices emit low levels of radio frequency energy (RF) in the microwave range while being used. Whereas high levels of RF can produce health effects (by heating tissue), exposure of low-level RF that does not produce heating effects causes no known adverse health effects. Many studies of low-level RF exposures have not found any biological effects. Some studies have suggested that some biological effects might occur, but such findings have not been confirmed by additional research. SOTEN's controller has been tested and found to comply with FCC radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure Guidelines.

1.7. Other Notes

In the unlikely event of an accident, report to the FAA along with your dealer within 10 days.
(Refer to the FAA website as per below.)

When do I need to report an accident? | Federal Aviation Administration (faa.gov)

Chapter 2

Product Overview







2.1. Product Details 24
2.2. System Configuration 25
2.3. Aircraft 27
2.4. Controller 32
2.5. TAKEOFF Ground Control Application 41
2.6. Battery 42
2.7. Battery Charger 49
2.8. Standard Camera/Gimbal 50
2.9. RTK Module (option) 52

2.1. Product Details

2.1.1. Standard Parts


The items are included in the basic SOTEN set.

- Aircraft
- Controller (USB Type-C® cable included)
- High-capacity battery (safety precautions/warranty card included)
- Battery charger (dedicated charging cable included)
- Standard camera/gimbal
- Safety precautions/disclaimer

Aircraft	Controller	High-capacity battery
		
Battery charger	**Standard camera/gimbal**	**Product warranty**
		

2.2. System Configuration

2.2.1. System Configuration Conceptual Diagram

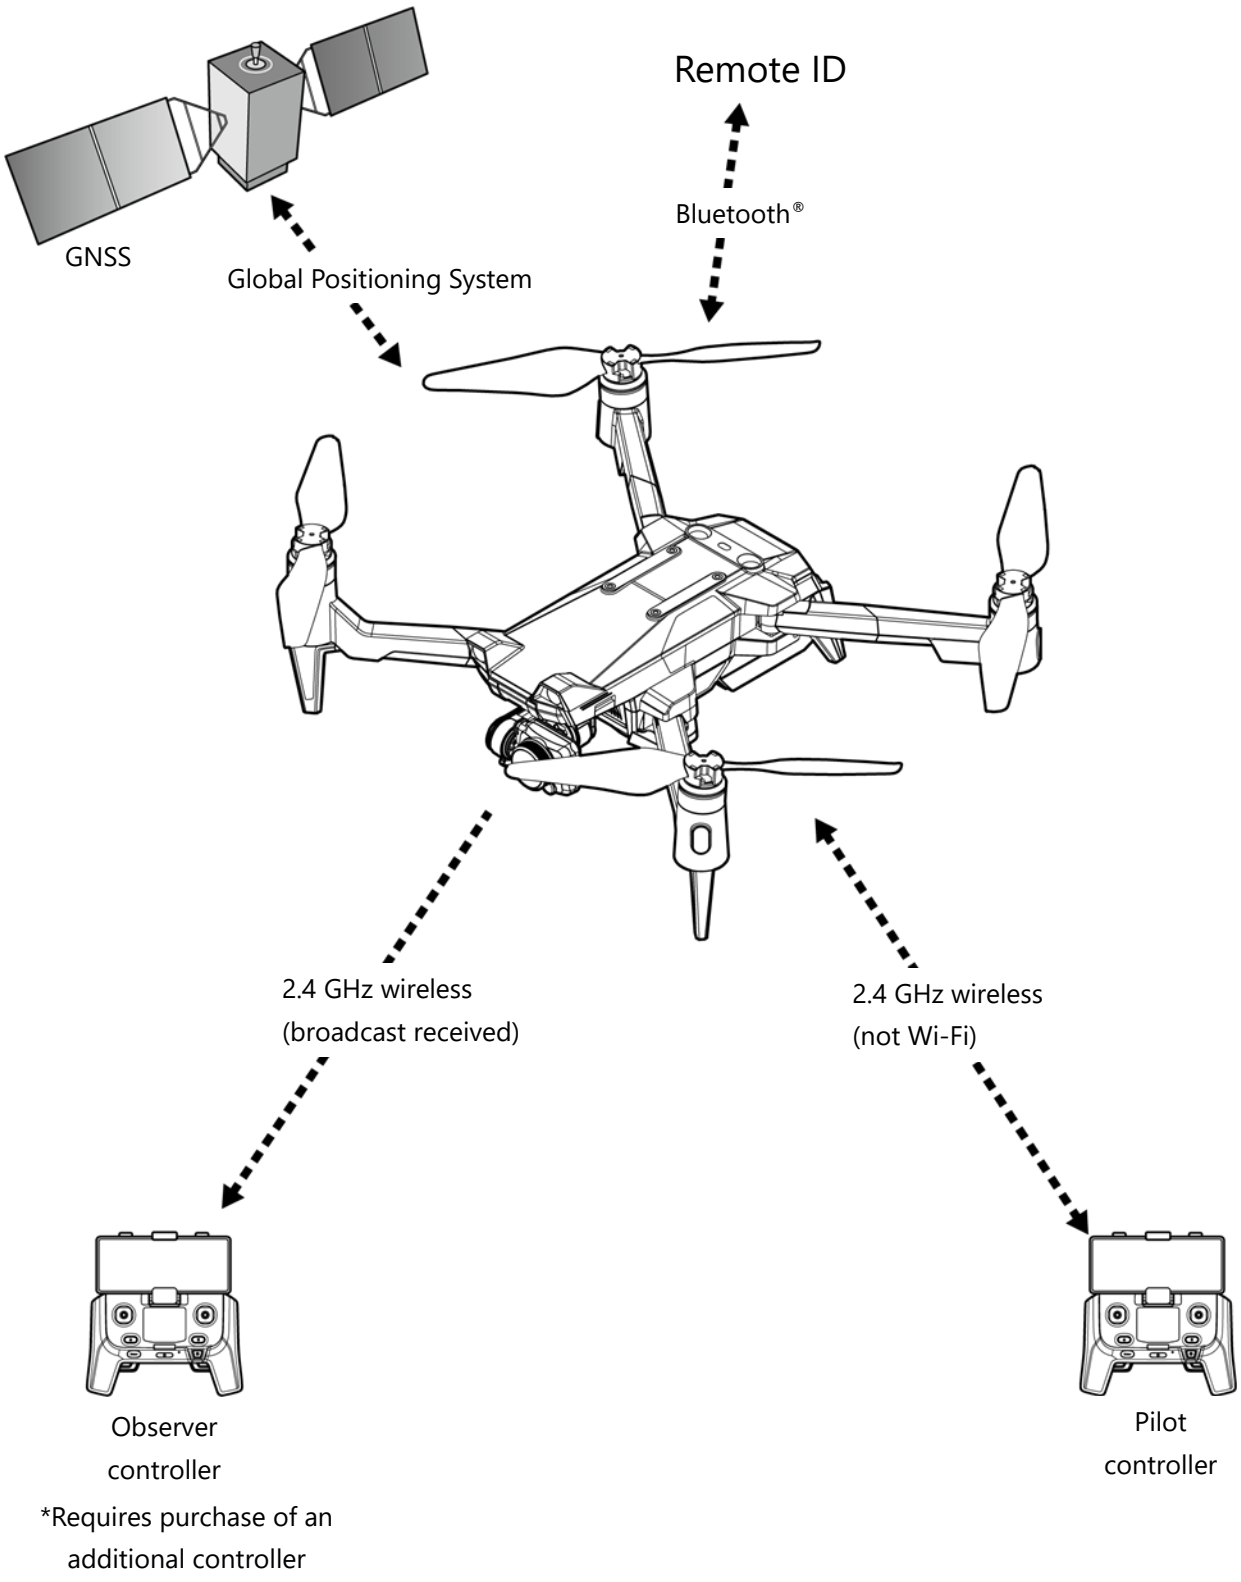

2.2.2. Functional Overview of Each Wireless System


No.	Name	Feature
1	GNSS	Uses radio signals received from Global Navigation Satellite System (GNSS) satellites to estimate the location of the aircraft relative to the earth. GPS/SBAS/QZSS satellites are used.
2	Remote ID	Uses Bluetooth 4.0 and 5.0 to broadcasts the unique identity of the aircraft, location, and status according to national regulations.
3	Cellular	When equipped with an embedded cellular modem, a cellular connection may be used to connect the aircraft to the ACSL TAKEOFF ground control application (commands, telemetry, and video). *In Japan, this requires a subscription to either the NTT DOCOMO LTE Over-the-Air Usage Plan or the KDDI Smart Drone 4G LTE Package.
4	2.4 GHz wireless	Uses low-power 2.4 GHz wireless signals (not Wi-Fi) to communicate control, command, telemetry, and video signals between the aircraft and the controller. Up to three controllers may be bound to one aircraft. All three bound controllers can simultaneously receive signals from the aircraft (telemetry and video), but only one controller (designated the pilot) can transmit signals (control and command) to the aircraft at a time. Pilot authority can be toggled during flight (pilot/observer switching).
5	920MHz (Japan only)	Uses low-power 920 MHz wireless signals for communication between two controllers (teacher and student) while in the lesson mode.




- Wireless communication may be disrupted if the aircraft is operating in an environment with electromagnetic interference.
- If communication becomes unstable, abort the flight and land in a safe location.


2.3. Aircraft

2.3.1. Names of Parts and Functional Overview

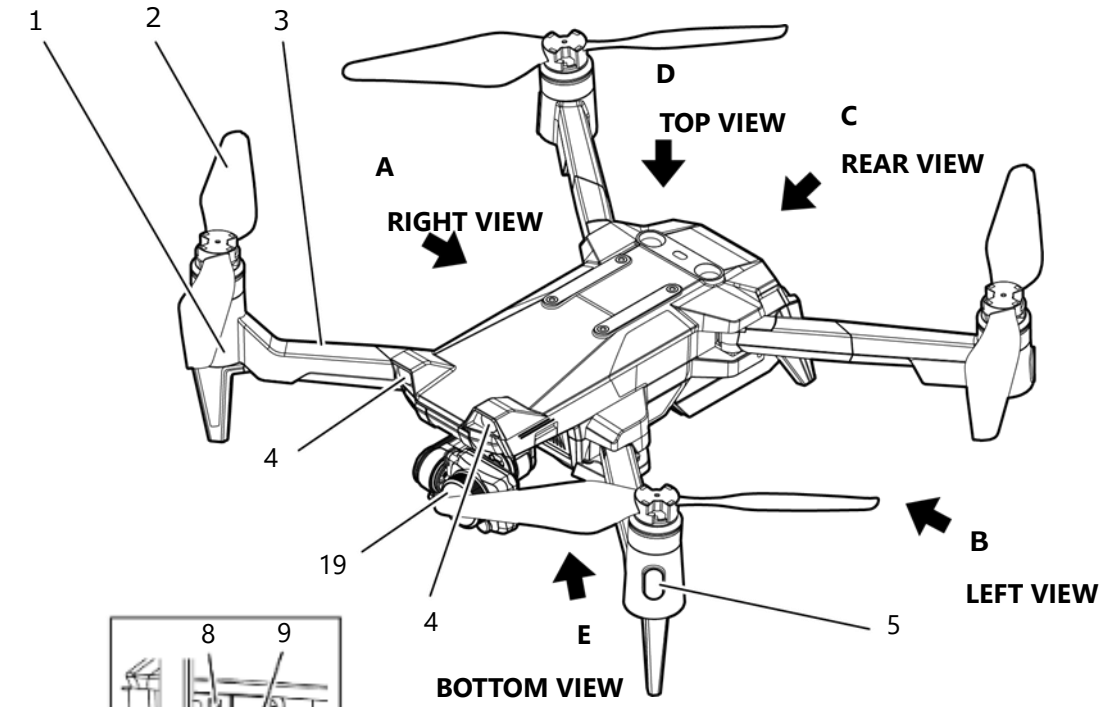


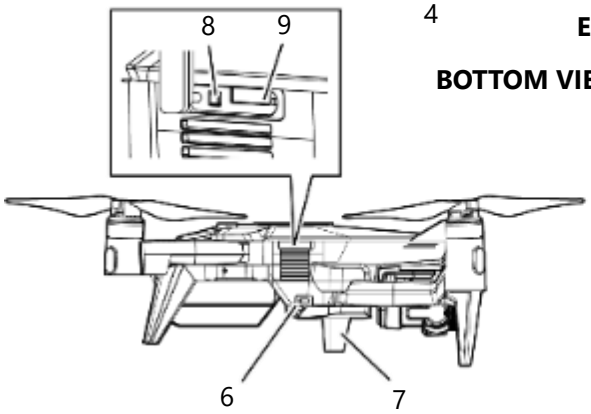


A: RIGHT VIEW

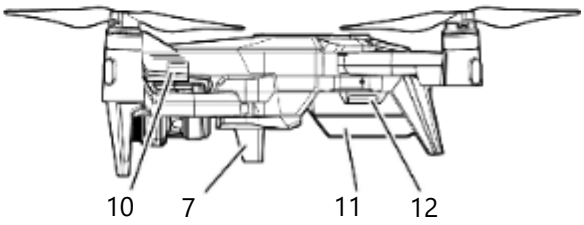


B: LEFT VIEW

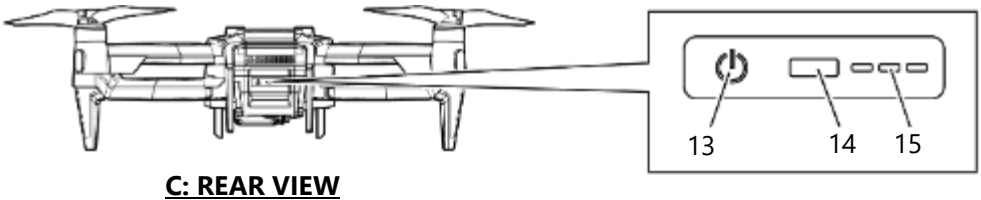

C: REAR VIEW

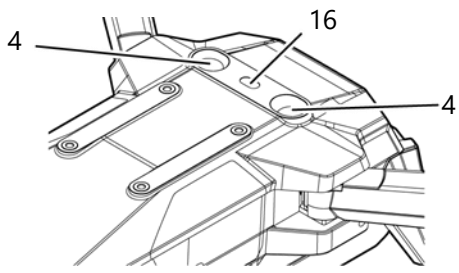

D: TOP VIEW

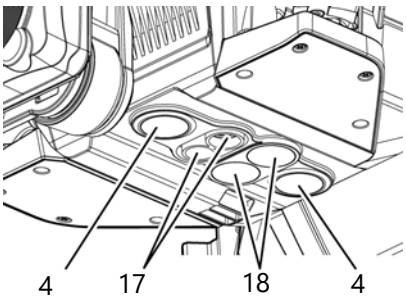


E: BOTTOM VIEW

No.	name	Feature
1	Motor	Rotates the propeller.
2	Propeller	Generates lift and propulsive force.
3	Arm	Supports the motors and propellers. Can be folded for transportation and storage.
4	Stereo cameras	Detect obstacles and the relative motion of the aircraft.
5	Navigation lights	LED lights mounted on the tip of the arms improve visibility of the aircraft's attitude and orientation.
6	USB Type-C® port	Service port used for aircraft diagnosis (not for customer use).
7	LTE antennas (LTE-equipped models only)	For high-speed cellular communications.
8	Bind button	Used to initiate the procedure for binding a controller to the aircraft.
9	SIM card slot	Slot for inserting a nano SIM card into the aircraft.
10	Camera release button	Used to release the camera from the aircraft.
11	Battery	Lithium-ion battery with an embedded battery management system (BMS).
12	Battery release button	Used to release the battery from the aircraft.
13	Power button	Used to turn the aircraft power on and off.
14	Status LED	Uses colors and patterns of flashing to indicate the status of the aircraft.
15	Battery level LED	Indicates the remaining level of battery charge.
16	Upward distance sensor	Measures the distance to obstacles above the aircraft.
17	Downward distance sensor	Measures the distance between the aircraft and the ground.
18	Downward light	Illuminates the ground below the aircraft.
19	Standard camera/gimbal	The camera captures video and still images. The gimbal isolates the orientation of the camera from the orientation of the aircraft.

2.3.2. Overview of the Visual System


The aircraft is equipped with 3 stereo cameras mounted on front, top and bottom. These stereo cameras are used to measure the distance to obstacles to avoid collision, and for visual odometry.
Visual odometry is an advanced computer vision algorithm that deduces the motion of the aircraft relative to the surrounding environment from the images captured by the onboard stereo cameras. Depending on the lighting and texture in the environment, visual odometry can enable stable hover even when reception of GPS signals is not possible.

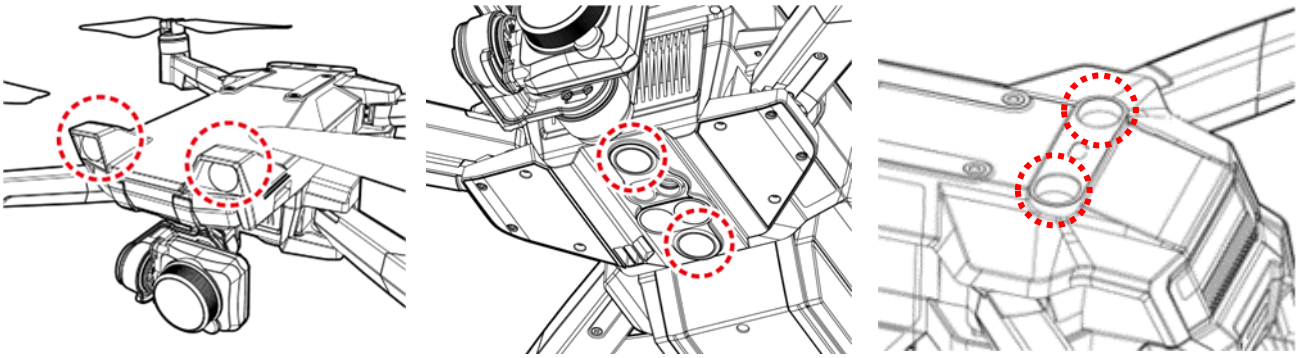

Stereo camera locations on the aircraft

Detection range

The detection range of the visual odometry system is as shown below.
Obstacles outside the detection range cannot be detected.)

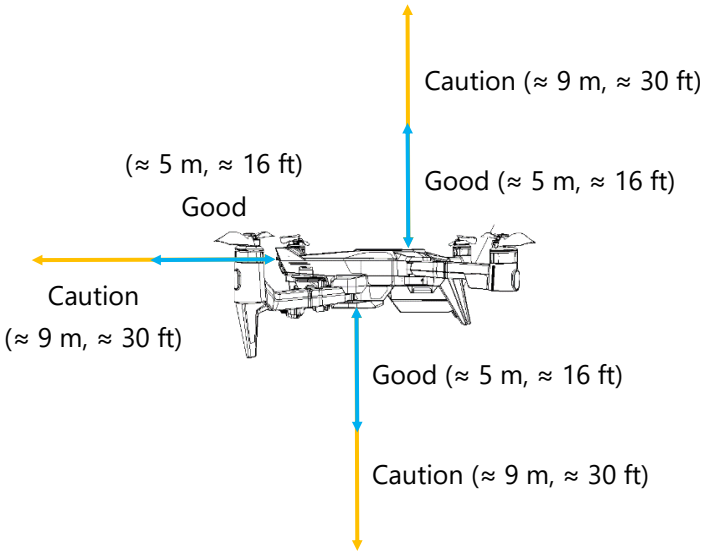

ADVISORY


- Maximum ground speed is limited to 2 m/s (4.5 MPH) and vertical speed is limited to 1 m/s (2.2 MPH).
- Operation may become unstable depending on the environment surrounding the aircraft.
- If operation becomes unstable, switch to manual mode immediately.
- Correct operation is not possible on plain surfaces with little visual information, surfaces with repeating, evenly spaced patterns that create optical illusions, or reflective surfaces such as glass or shiny metal.
- The visual odometry cameras may not operate properly in excessively bright or dim environments such as direct sunlight or at night.

- Obstacles less than 20 cm (8 inches) wide may not be detected.
- Always keep the camera and sensor lenses clean. Dust, dirt, and other contaminants will reduce sensitivity.
- Over time, the heading (yaw angle) will slowly drift. In this case, you will need to use the controller's yaw control to maintain the desired heading (yaw angle).

Brief description of the infrared distance sensors

Infrared distance sensors located on the top and bottom of the aircraft measure the distance to obstacles to avoid collisions and provide soft landing assistance respectively*.


*Soft landing assist functions only in the position (POS) and auto (AUT) modes(auto-landing).

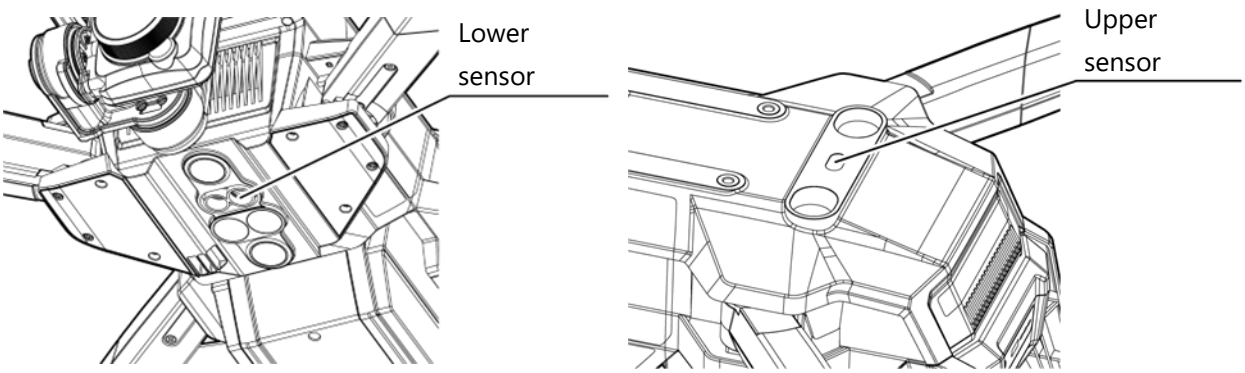

Detection range

The detection range of the infrared distance sensors is shown below.

Obstacles outside the detection range cannot be detected. Please use caution when referring to measurements from the infrared distance sensors.

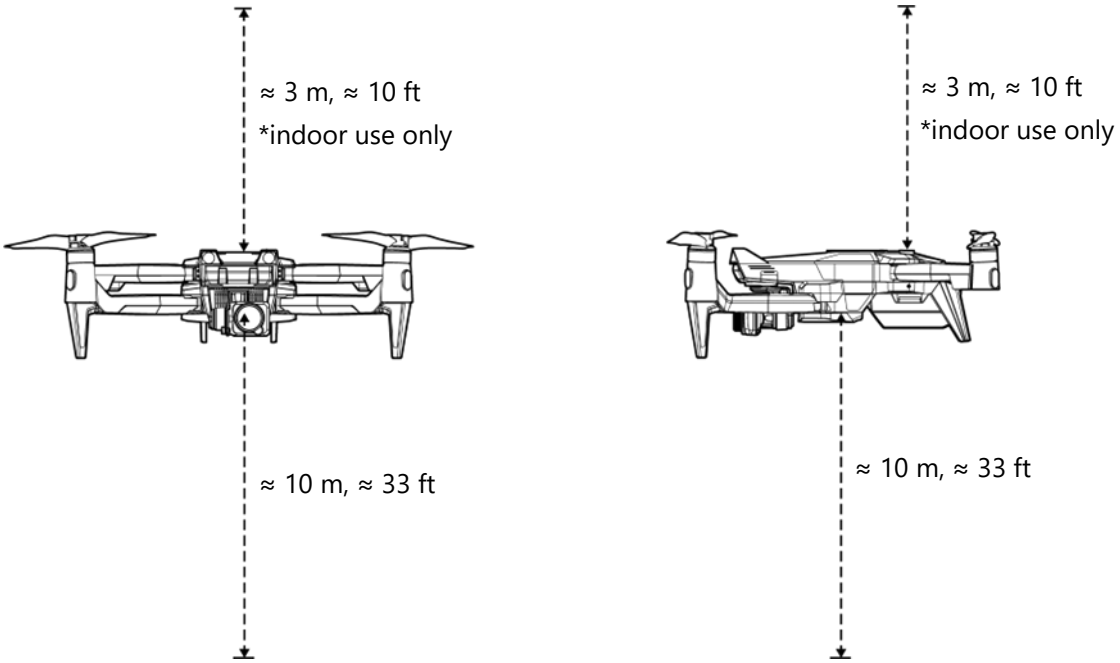


Class 1 Laser Product


CAUTION


- Distance may not be measured correctly due to the influence of infrared light from the sun or other sources of infrared light.
- The top sensor is not suitable for outdoor use.
- When flying over surfaces that reflect sunlight, such as water or shiny metal, distance may not be measured correctly.
- Familiarize yourself with the detection range of the sensor. Obstacles beyond the detection range will not be detected.
- Always keep the sensor lenses clean. Dirt and debris on the lenses will reduce sensitivity.

2.4. Controller

2.4.1. Names of Parts and Functional Overview

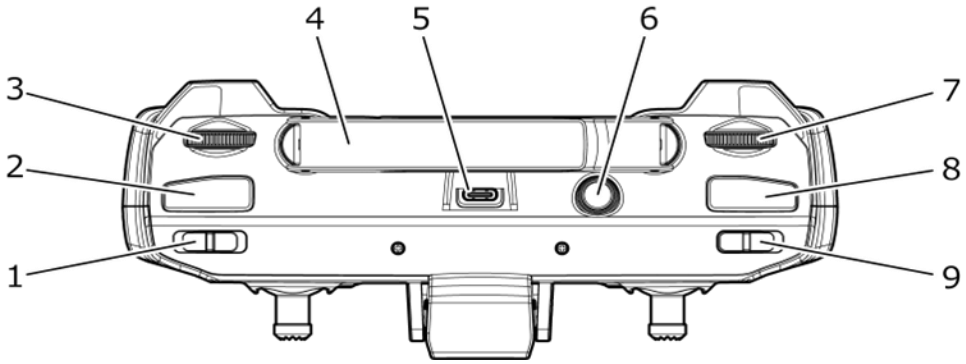


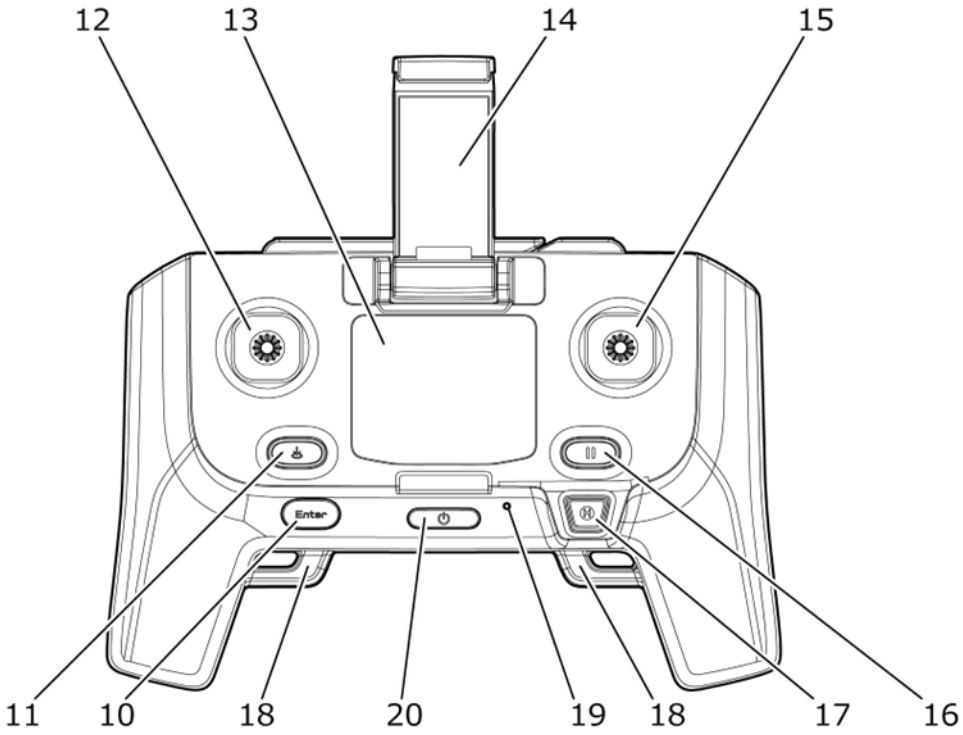

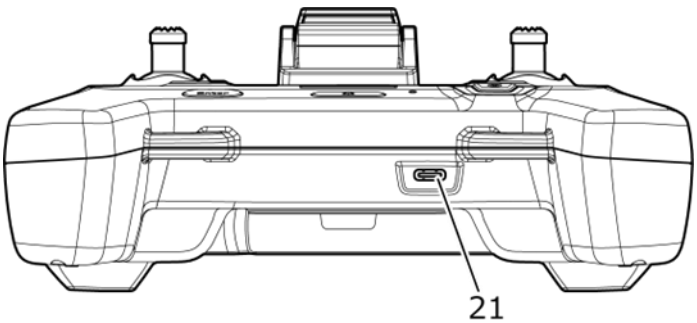

No.	Name	Feature
1	Flight mode switch	Switch to select the flight mode.
2	Gimbal control button L	Tap to point the camera forward (both pan and tilt). Press and hold to point the camera straight down (both pan and tilt).
3	Gimbal Control wheel L	Used to adjust the camera tilt.
4	Antennas	Transmits and receives 2.4 GHz signals.
5	Mobile device connection port	USB Type-C® port for wired connection to mobile devices.
6	Emergency button	Used in an emergency to stop the motors, causing the aircraft to fall from the sky if in flight.
7	Gimbal control wheel R	Used to adjust the left/right pan of the camera.
8	Camera control button R	Tap to start/stop interval photography. Press and hold to start/stop video recording.
9	Collision avoidance switch	Used to turn on or off the collision avoidance feature.
10	Enter button	Used for various settings.
11	Auto-landing button	Press and hold to Initiate an autonomous landing at the current location.
12	Left stick	Used to control the aircraft. It is a self-neutral type that automatically returns to the center position when the finger is released.
13	LCD Screen	Displays aircraft speed, battery level, error warnings, etc.
14	Mobile device mount	Used to attach a mobile device to the controller.
15	Right stick	Used to control the aircraft. It is a self-neutral type that automatically returns to the center position when the finger is released.
16	Pause button	Pauses the motion of the aircraft (enters a hover) when flying autonomously.
17	Go-home button	Press and hold to initiate an autonomous return to the takeoff location.
18	Strap holder	A mounting location for neck straps or other straps.
19	Status LED	Indicates the controller's status.
20	Power button	Used to turn controller power on and off.
21	Charging port	USB Type-C® port to connect to a charger for charging the controller.

2.4.2. LCD Display

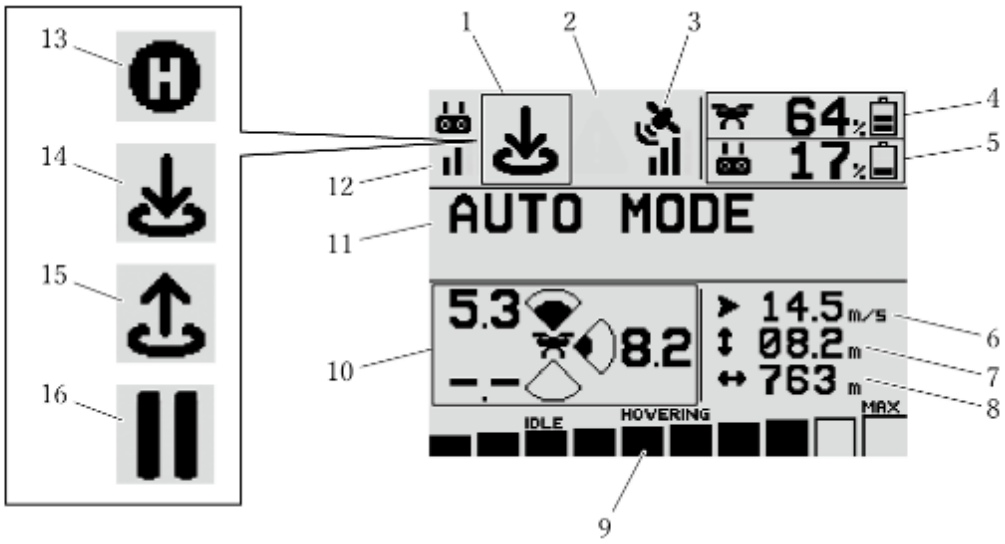


No.	name	Feature
1	Aircraft status display	The status of the aircraft is indicated by icons (nos. 13 to 16).
2	Notification symbol	Displays an icon to indicate whether a notification is a warning, caution, or alert.
3	Number of GPS satellites	Indicates the number of GPS satellites from which signals are being received. 0: 3 or less, 1: 4 to 6, 2: 7 to 9, 3: 10 to 12, 4: 13 or more
4	Aircraft battery level indicator	Displays the remaining charge of the aircraft battery.
5	Controller battery level indicator	Displays the remaining charge of the controller battery.
6	Speed indicator	Displays the speed of the aircraft.
7	Height Indicator	Displays the height of the aircraft from the takeoff point.
8	Horizontal distance indicator	Displays the horizontal distance of the aircraft from the takeoff point.
9	Aircraft power consumption indicator	Indicates the power consumption of the aircraft.
10	Distance to obstacle (m) Forward, upward, and downward	Displays the distance between the aircraft and surrounding obstacles.
11	Notification area	Displays flight modes, warnings, cautions, etc.
12	Received signal strength indicator	Indicates the strength of the signals being received from the aircraft by the controller. 0: 91 or more, 1: 90~71, 2: 70~51, 3: 50~31, 4: 30 or less (dBm).

13	Go-home indication	This icon is displayed when the aircraft is in go-home mode (autonomously returning to the takeoff point).
14	Auto-landing indication	This icon is displayed when the plane auto-landing mode (autonomously landing at the current location).
15	Auto-takeoff indication	This icon is displayed during auto-takeoff.
16	Pause indication	This icon is displayed when pausing (entering a hover) from autonomous motion of the aircraft.


2.4.3. SYSTEM Settings Menu: Screen Transition Diagram




With the controller powered off, press the power button while holding down the Enter button, or with the controller turned on, hold down the controller's Go-home button for 3 seconds to display the following system setup screen.





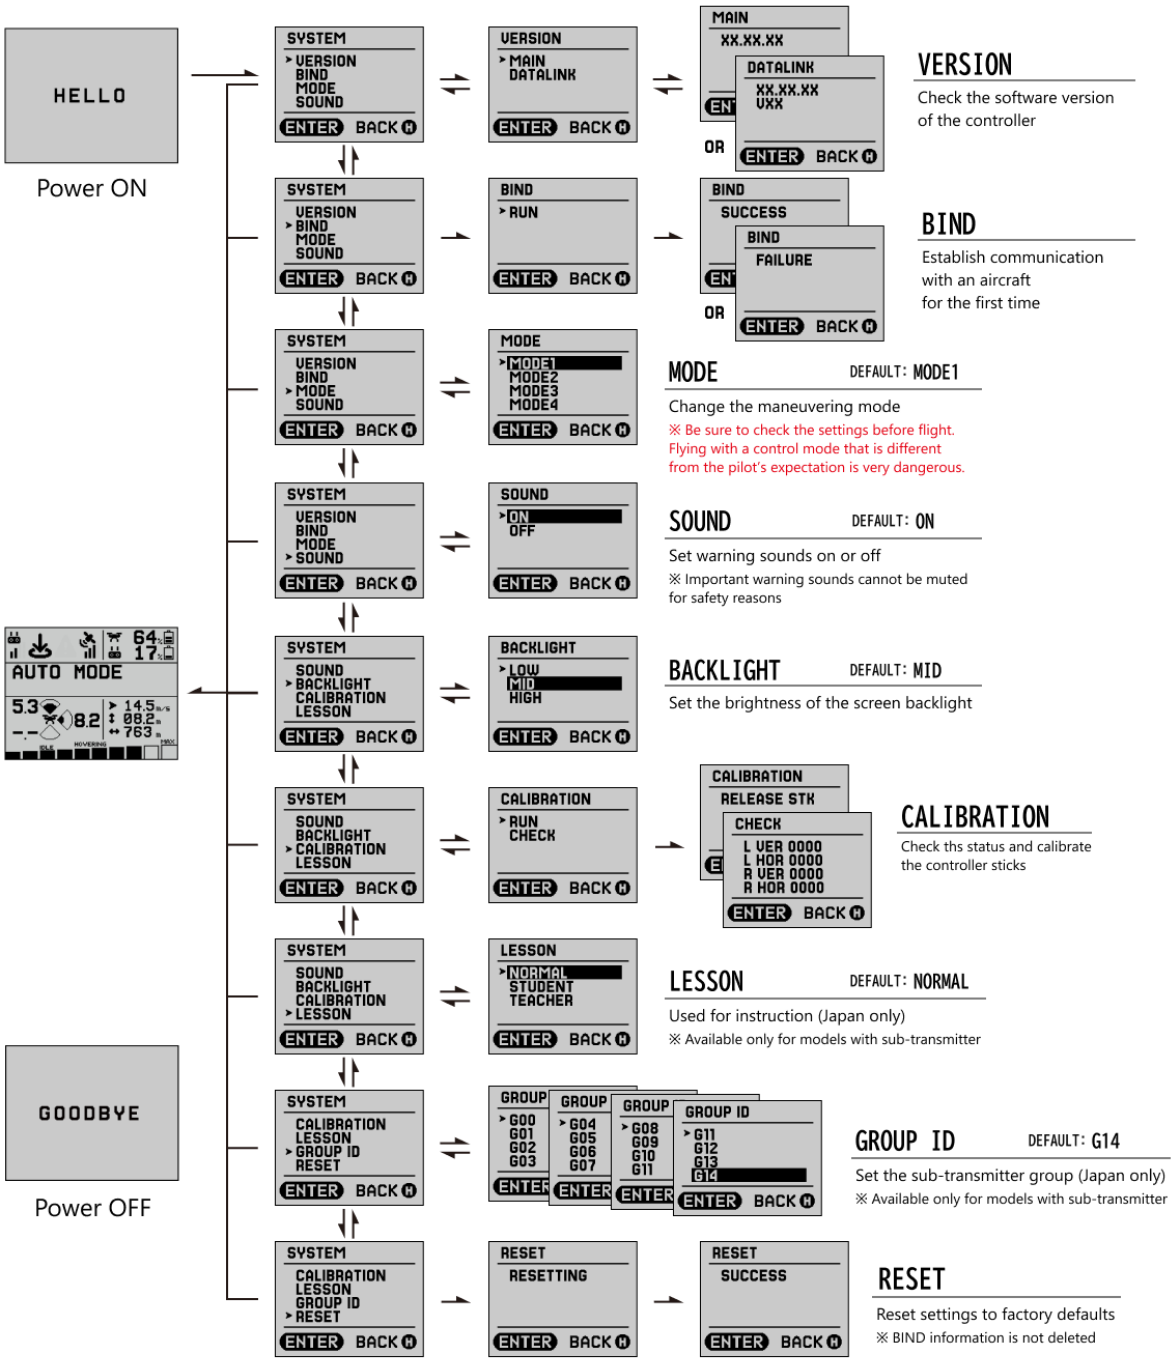


2.4.4. Status LED Indications

The status of the controller is indicated by the color and flashing pattern of the status LED as described below.

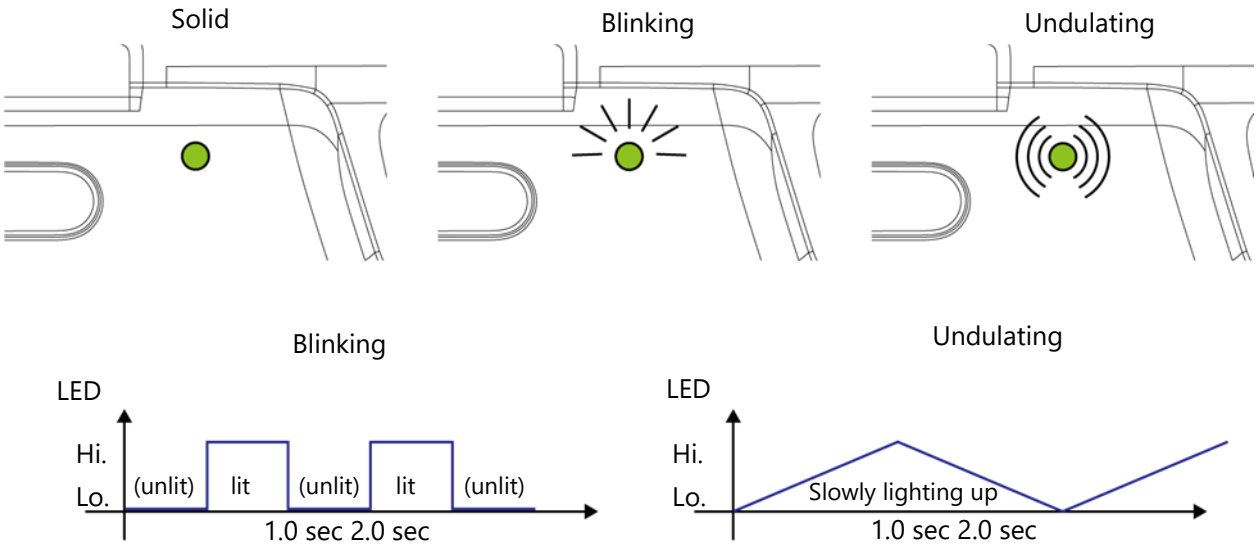


Status	Status LED
Normal operation in pilot mode	 Solid green
While in the process of pilot/observer switching	 Blinking green
Normal operation in observer mode	 Undulating green

Status	Status LED
Communication with the aircraft is interrupted or not yet established	 Solid red
Charging	 Solid orange
Charging suspended due to low temperature	 Blinking Orange
Lesson mode: teacher	 Solid purple
Lesson mode: student	 Undulating purple

2.4.5. Sounds


The various sounds that the controller produces to draw the attention of the pilot are described below. It is important that you understand what each sound means so that you are adequately alerted to any safety issues.

When a warning is issued

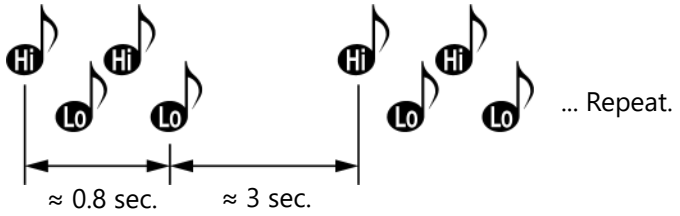


- When a warning message is issued, the controller notifies the user with both this sound and vibration.
- For safety reasons, the warning sound cannot be muted even when the SOUND setting is set to OFF in the controller settings menu.

When a caution is issued

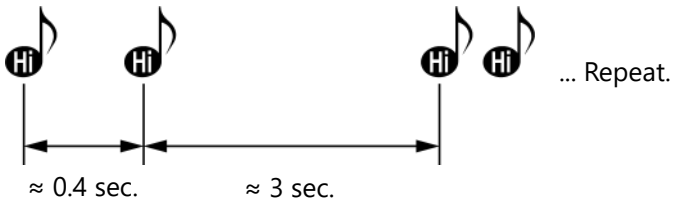


- When a caution message is issued, the controller notifies the user with this sound.
- If the SOUND setting is set to OFF in the controller settings menu, this sound is muted.
- The notification can be dismissed by pressing the Enter button.

When an alert is issued



- When an alert message is issued, the controller notifies the user with this sound.
- If the SOUND setting is set to OFF in the controller settings menu, this sound is muted.

When obstacle is detected

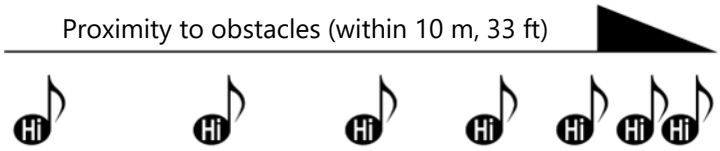


- When an obstacle is detected, the closer the obstacle is, the shorter the warning sound interval becomes.

Warning tone interval (sec)	1.0	0.7	0.5	0.3	0.1	0.1
Distance (m)	10	7	5	3	1	0.5


2.4.6. Extended Functionality (HDMI output and mobile device charging)

- By connecting a USB Type-C® multiport HDMI adapter to a mobile device compatible with DisplayPort Alternate Mode (Alt Mode), the screen of the mobile device can be mirrored to an HDMI output while maintaining the connection to the controller.
- Using this adapter, it is also possible to charge the mobile device while it is in use.

When charging the mobile device is not necessary

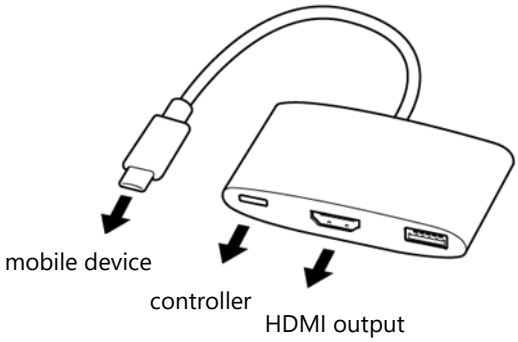

When charging the mobile device is desired

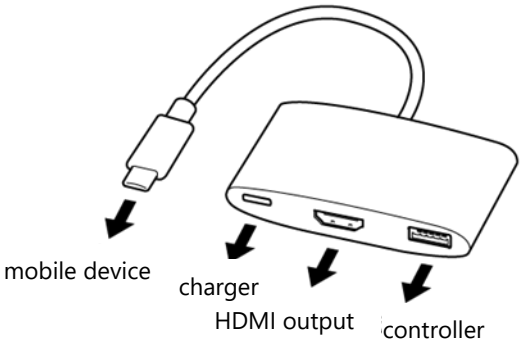

CAUTION

- Depending on quality or compatibility with HDMI or USB Type-C®, not all adapters will work properly with the particular mobile device that is being used with the controller.
- For detailed information on supported standards, etc., please refer to the instruction manual for the product in question.
- Damage to or malfunction of SOTEN resulting from the use of the USB Type-C® adapter is not covered by the warranty.


2.5. TAKEOFF Ground Control Application

2.5.1. Functional Overview


The ACSL TAKEOFF ground control application is intended for use only with ACSL SOTEN. It offers the ability to monitor the telemetry and video that is broadcast from the aircraft, manage aircraft settings, issue commands to the aircraft, set geofences, plan and execute autonomous flights, review prior flights, and more. Please refer to the ACSL TAKEOFF ground control application user manual for more information.

2.5.2. On-Screen Display

Flight Screen

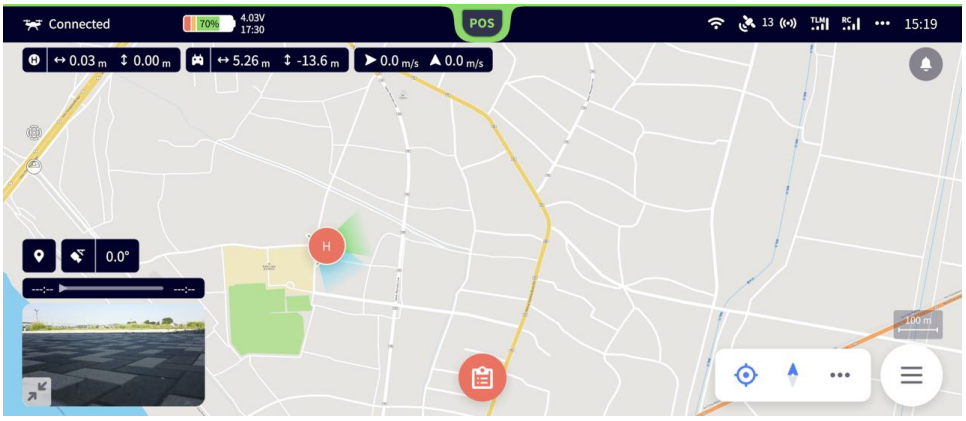

Plan Screen

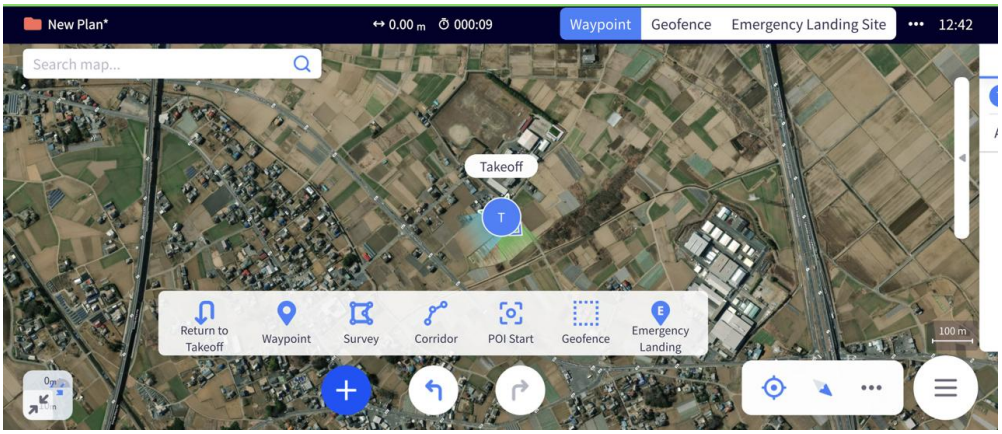


2.5.3. Key Features

- Flight command functions (preflight check, flight status display, flight commands, camera control and settings, etc.)
- Flight planning functions (creating and editing flight plans, setting geofences)
- Flight log functions (upload and download flight logs, review, etc.)
- Configuration functions (firmware updates, calibration, maintenance information, etc.)

2.6. Battery

2.6.1. Names of Parts

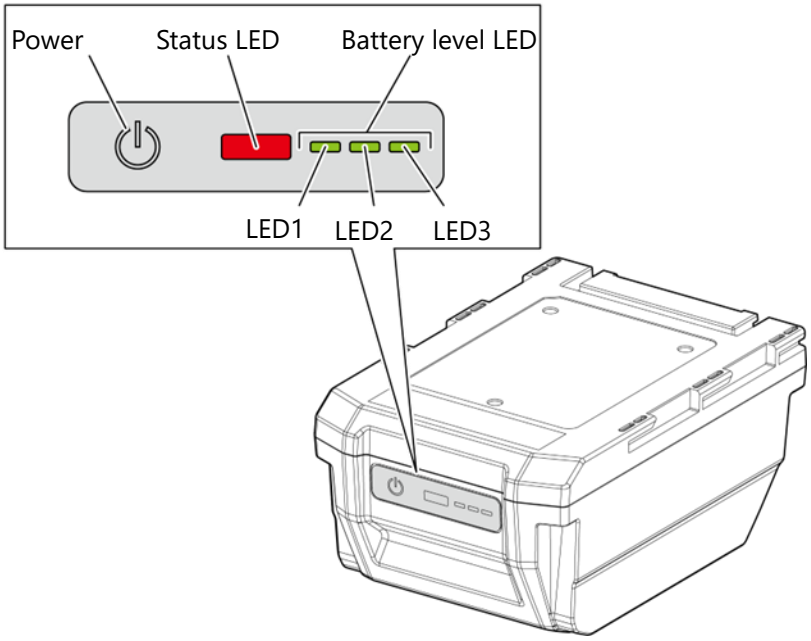

2.6.2. Battery Features

The battery is equipped with an embedded battery management system (BMS).
The features of the BMS enhance safety during use.

Monitoring

To maximize safety, the BMS continuously monitors the battery's condition (output, remaining battery charge, temperature, etc.), and logs occurrences of any conditions that are outside of the normal operating range.

Mode switching

The BMS automatically switches to sleep mode, shutdown mode, or safety lock mode to check battery level, prevent over-discharge, and limit battery use under hazardous conditions.

See Section 2.6.3: Battery Modes.

Self-diagnostics

When the battery is powered on, the BMS performs self-diagnostics to check for system abnormalities.

➔ See Section 2.6.4 .Basic Battery Operation.

Product life prediction function

The BMS determines the remaining useful life of the battery based on a variety of data. When the battery is approaching the end of its life, a status LED will indicate such. When the battery reaches the end of its life, the BMS will automatically engage the safety lock rendering the battery unusable.

➔ See Section 2.6.4: Basic Battery Operation.



An LED warning may not occur indication before the safety lock is applied is not guaranteed. The safety lock may be applied without warning if the battery management system (BMS) deems it necessary to ensure safety depending on the method of use, operating environment, or storage environment.

Charge Standby

The BMS automatically switches from normal charge mode to charge standby mode when the internal temperature of the battery is outside the safe temperature range for charging. For example, the internal temperature of the battery may be high immediately after a flight, and the BMS may switch to charge standby mode upon connection to a charger to prevent excessive battery performance degradation caused by charging at a high internal temperature.

➔ See Section 4.3.2: Battery Charging Modes.

2.6.3. Battery Modes

The BMS may switch the battery into the following modes to enhance battery safety.

Sleep mode

The BMS puts the battery in sleep mode after the aircraft is powered off. In this mode, the BMS monitors battery condition (e.g., temperature) and records monitoring values at regular intervals for safety determination. In this mode, the user can check the battery level or power on the aircraft by pressing the battery power button.


Shutdown mode

Shutdown mode is a mode that consumes less power than sleep mode and is designed to prevent over-discharge of the battery. In this mode, the battery will not respond to pressing the power button and the aircraft cannot be powered on. Note that batteries are placed in shutdown mode prior to leaving the factory. If the battery is stored for a long period of time with low remaining charge, the BMS transition to shutdown mode to prevent over-discharge, and the condition monitoring operation will also cease. Connect the battery to a charger to return it to sleep mode from shutdown mode.

Safety lock (permanent)

Safety lock is a mode that completely disables operation of the battery. The BMS transitions the battery to this mode when it determines, through several criteria, that the battery can no longer be safely used. In this mode, the status LED will continuously blink red until the battery charge reaches an appropriately low level for maximum safety. Once discharge is complete, all operation will be completely disabled.

LED indication of safety lock mode

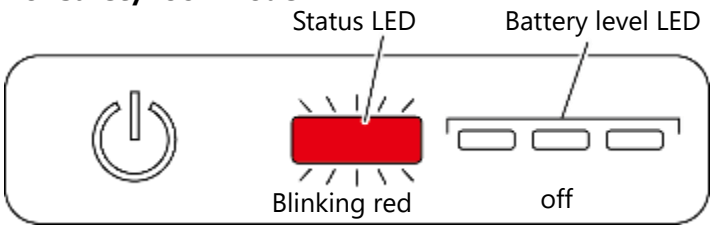


ADVISORY

If the above LED pattern is displayed, contact your dealer to replace the battery.




2.6.4. Basic Battery Operation

Pressing the power button initiates the BMS self-diagnostics, which takes about 2 seconds. Upon completion, the results of the self-diagnostics are indicated by the status LED. After that, the remaining battery charge is displayed.
Please install the battery to the aircraft after the battery level display turns off.

- LED indication during self-diagnostics

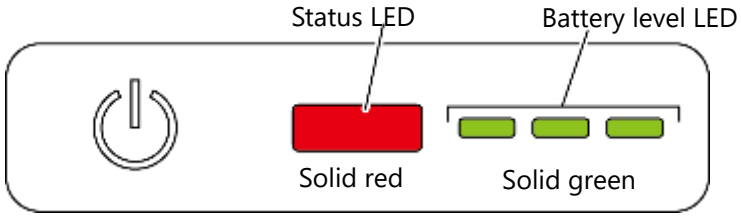





- LED indication of self-diagnostics results

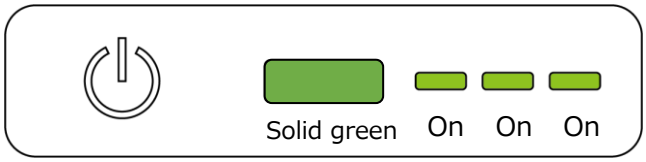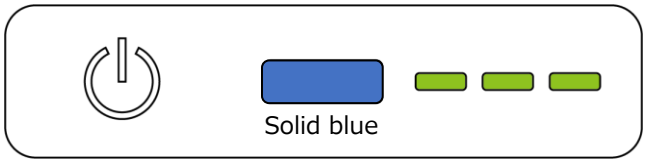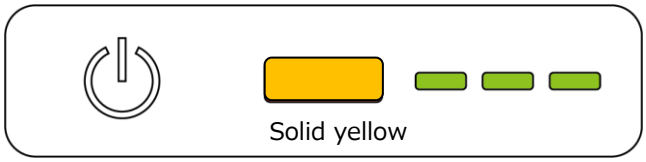Status LED	Diagnostics results
	Battery level 95% or more
	Battery temperature Below 20℃
	Battery cell imbalance

ADVISORY


If the result of the self-diagnostics indicates a battery cell imbalance, fully charge the battery and then leave it in sleep mode (i.e. without pressing the power button) for 3 hours. The BMS will automatically initiate cell balancing. When the status LED turns solid green, the automatic balancing is complete.

- LED indication of remaining battery charge

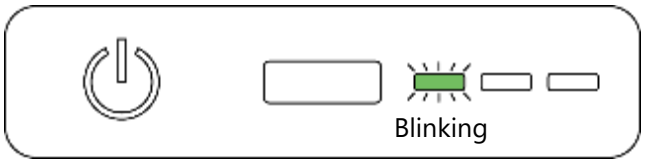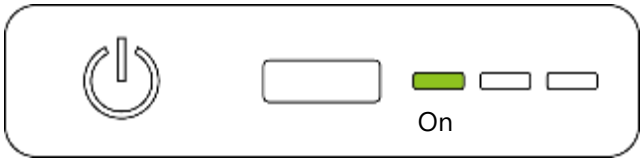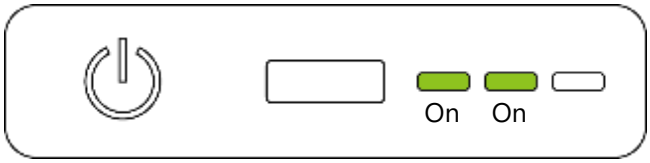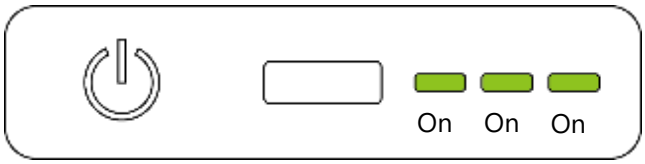Status LED/Battery level LED	Battery level
	0-24%
	25-49%
	50-74%
	75-100%





If an error state is detected during self-diagnostics, the status LED will blink for about 10 seconds and then turn off.
However, the standard battery holds the error condition internally for about 30 seconds, so please wait an additional 20 seconds after the LED stops blinking before pushing the power button again. As an example, the BMS may trigger an error indication if the internal battery temperature is outside the range for safe operation.

- Self-diagnosis LED indication when an error state is detected.

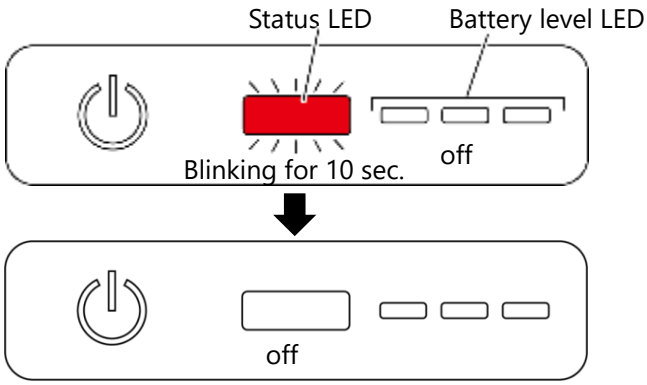

If the BMS determines that the battery is nearing the end of its life, the status LED will continue to blink and the remaining battery charge will be displayed.

- LED indication when battery life is nearing end of life

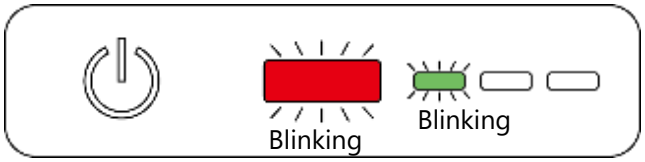
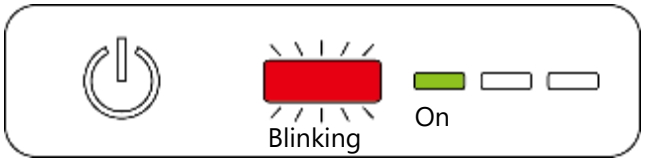
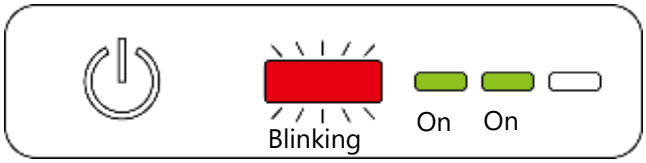
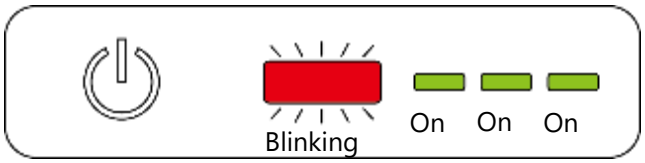
Status LED/Battery level LED	Battery level
	0-24%
	25-49%
	50-74%
	75-100%

ADVISORY

- If the above LED pattern is displayed, the battery is nearing the end of its useful life and should be replaced immediately.
- When the battery reaches the end of its useful life, a safety lock is automatically activated and the battery will no longer power on.
- Please contact your dealer to purchase replacement batteries.

If a temporary anomaly such as communications timeout (communication failure) or overcurrent is detected when connecting to the aircraft or charger, the status LED will remain lit and the remaining charge will be displayed.

- LED indication in case of battery failure

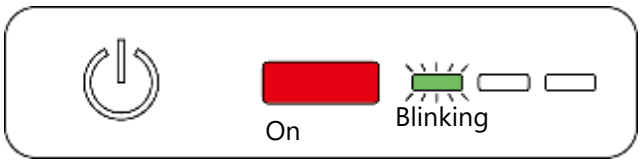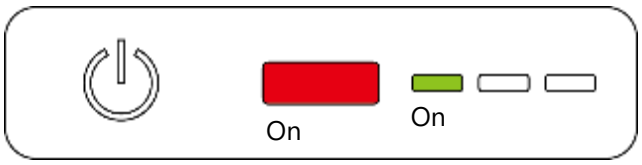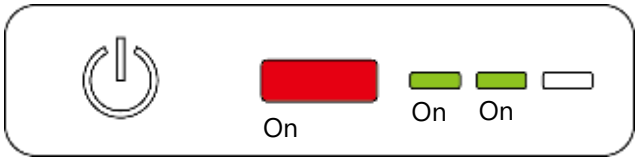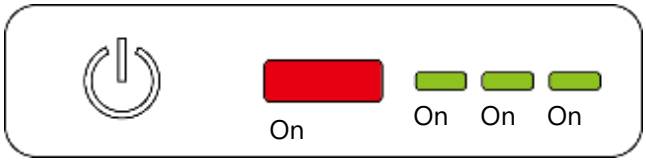Status LED/Battery level LED	Battery level
	0-24%
	25-49%
	50-74%
	75-100%

At this time, if an abnormality is detected that prevents future use, the safety lock (permanent) is applied and the status LED continues to flash red.


➔ See Section: 2.6.3: Battery .


2.7. Battery Charger

2.7.1. Indications

The status LED and the remaining battery LEDs light up (blink) according to the charging mode and charging status.

➔ See Section: 4.3.2: Battery Charging Modes.

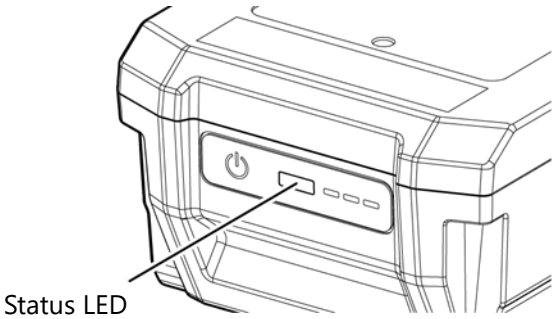

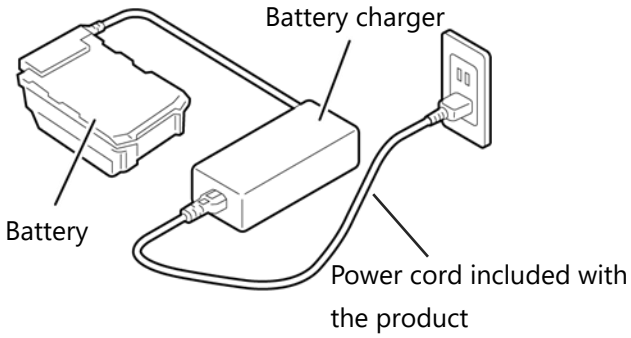


ADVISORY


- Do not connect the battery to the charger while the battery status LED is on. Charging may not start properly.


2.8. Standard Camera/Gimbal

2.8.1. Standard Camera (visible camera)

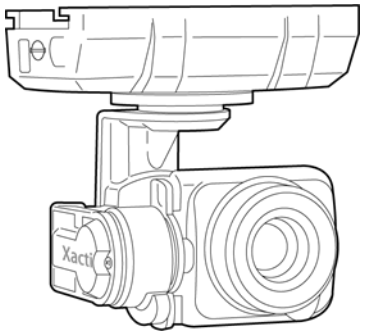

- CX-GB100 camera with integrated 20MP image sensor, large aperture lens, and 3-axis stabilized gimbal (tilt, pan, roll).
- Low-noise, high-quality image capture is achieved with a proprietary signal processor.
- For more information about the product and how to handle it, please refer to the CX-GB100 User Manual and the ACSL TAKEOFF User Manual.

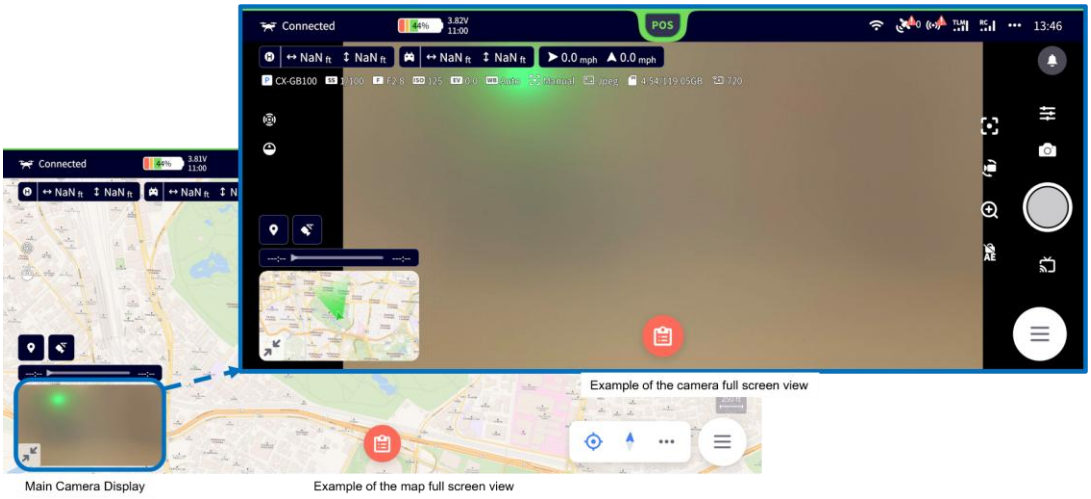


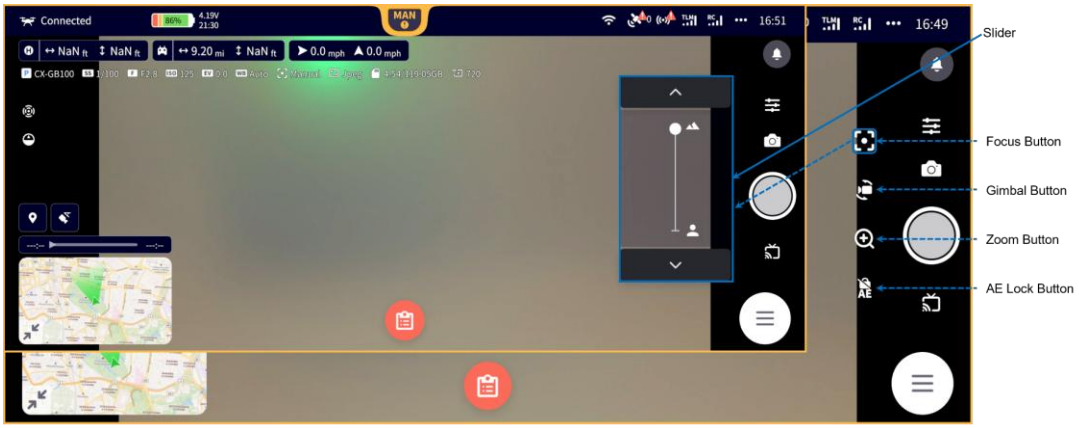



Example of the map full screen view


CAUTION

If the camera is used continuously for a long period of time (more than 40 minutes), the parts shown in yellow in the diagram below may become hot. In this case, be careful not to touch these parts, as this may cause burns, etc. (Common to CX-GB100/200/300/400)



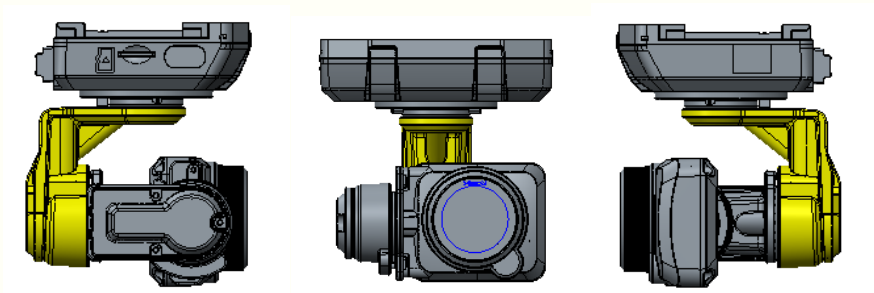






2.9. RTK Module (Option)



2.9.1. RTK-SOTEN

RTK-SOTEN is an RTK module designed to enable high-precision Network RTK positioning when attached to aircraft

This product is an optional accessory (sold separately).

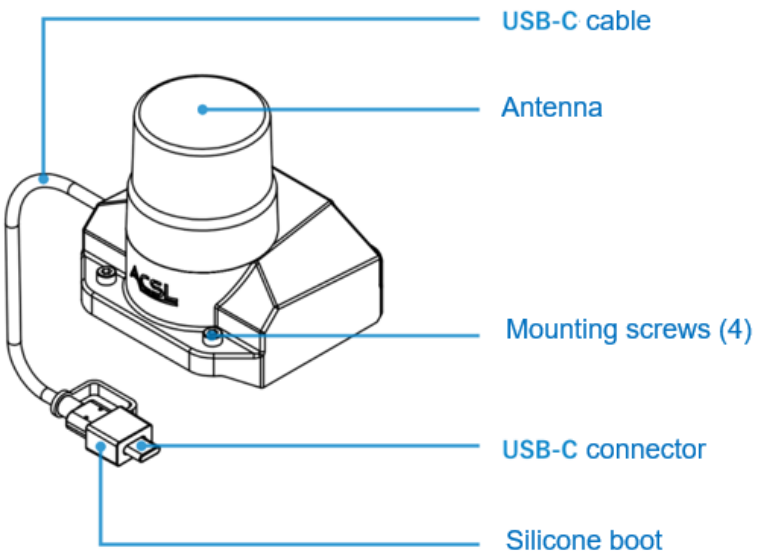

Package Contents


RTK-SOTEN Unit	Hex Key	Quick Start Guide
		

Chapter 3

First-Time Use

3.1. Initial Battery Activation 54
3.2. Installing the TAKEOFF Ground Control Application 55
3.3. Controller Preparation 56
3.4. Aircraft Preparation 57
3.5. First Connection (binding) 60
3.6. Stick Mode Settings 63
3.7 Propeller Installation 69
3.8. Camera Initialization 70
3.9 RTK Settings (Option) 71

3.1. Initial Battery Activation

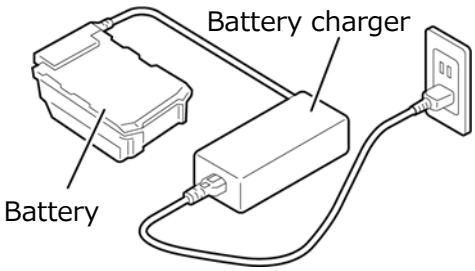

ADVISORY

- Batteries are shipped from the factory in shutdown mode and will not respond to the power button.
- To activate a new battery, connect it to a charger.

➔ See Section 4.3: “Battery Charging.”.

CAUTION

Always fully charge the battery before installing it onto the aircraft for flight.

3.2. Installing the TAKEOFF Ground Control Application

The ACSL TAKEOFF ground control application is available for Android mobile devices by downloading the application from the ACSL SOTEN product website or from Google Play.


- Firmware updates for the SOTEN controller, controller, communication module, and battery are all performed using the ACSL TAKEOFF ground control application.
- For details, please refer to the ACSL TAKEOFF ground control application user manual.



TAKEOFF icon

3.3. Controller Preparation


1. Attach the mobile device to the mobile device holder.

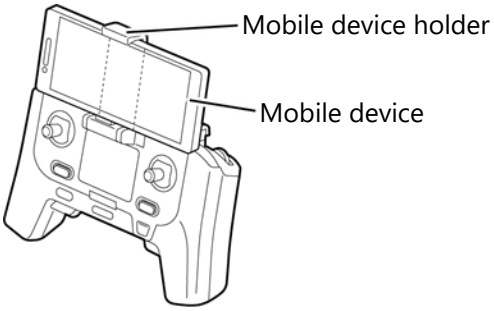

ADVISORY

Attach the mobile device to the mobile device holder so that it does not interfere with the buttons on the mobile device. Failure to do so may result in damage to or malfunction of the mobile device.

2. Connect the mobile device to the controller via USB Type-C®.

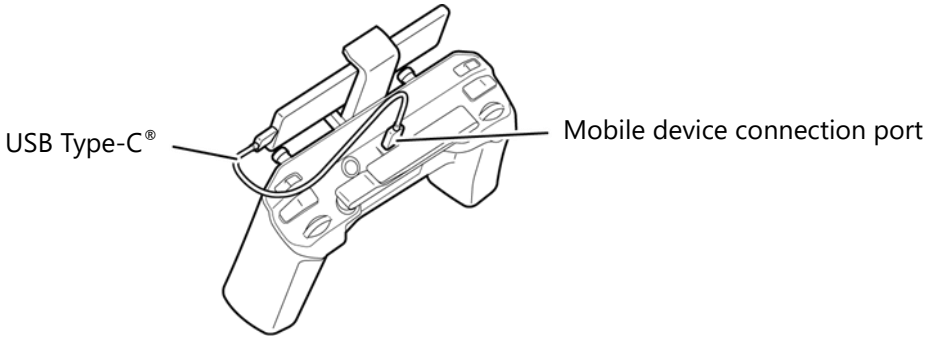


ADVISORY

The USB Type-C® cable should be connected to the mobile device connection port at the top of the controller, not the charging port at the bottom of the controller. Communication will not be possible if the mobile device is connected to the charging port.

3. Deploy the controller antennas.

➔ See Section 5.5.5: Determine Optimal Antenna Direction.

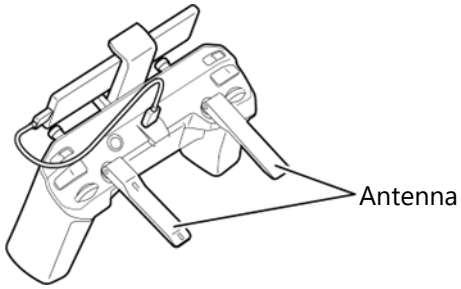

ADVISORY


If necessary, charge the controller in advance.

➔ For information on how to charge the controller, see Section 4.4: “Controller Charging.” .

3.4. Aircraft Preparation

1. Deploy the arms of the fuselage.

Open the arms firmly until they click into place. Do not install the propellers yet.

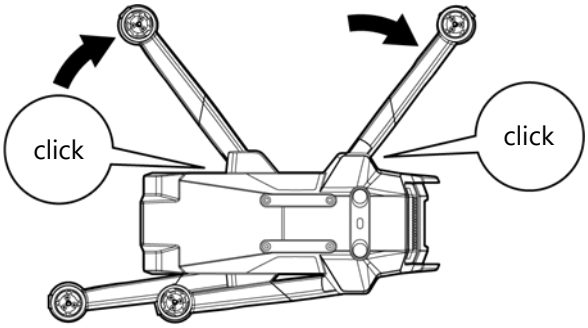


WARNING

- Open the arms firmly until they click into place. Failure to do so may result in a crash.

2. As shown in the figures below, align the camera/battery hooks with the mounting grooves on the aircraft, then slide the camera/battery in the direction shown until it locks into place.

Slide it into place until it is firmly locked.

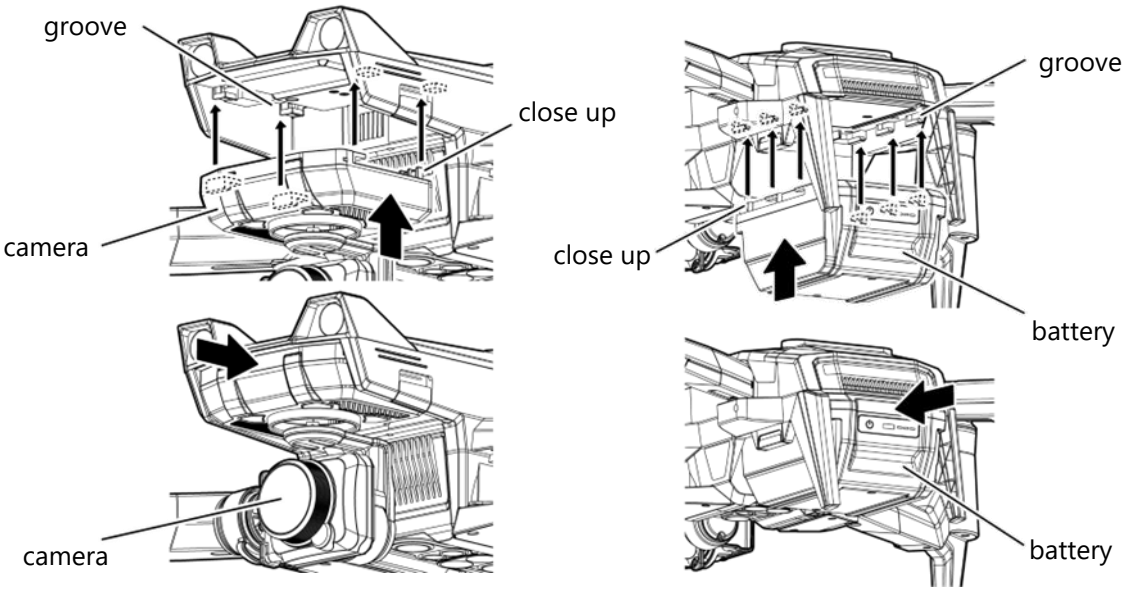


CAUTION

When installing the camera and battery, be careful not to pinch your hands or fingers. Failure to do so may result in injury.

ADVISORY

- When installing the camera, do not wear gloves, etc., but be sure to check the camera is properly installed with your bare hands.
- If a sticker made by a label maker or other means is attached to the side of the camera mount, it may interfere with installation. It is recommended that stickers only be attached to the upper part of the mount.
- Only install the camera with the aircraft powered off. Installing the camera with the power on may cause malfunction of the camera or aircraft.

3. Check that there is no misalignment between the camera and battery locks and the body of the aircraft (not half-locked). If the battery is only half-locked, the aircraft may not start.

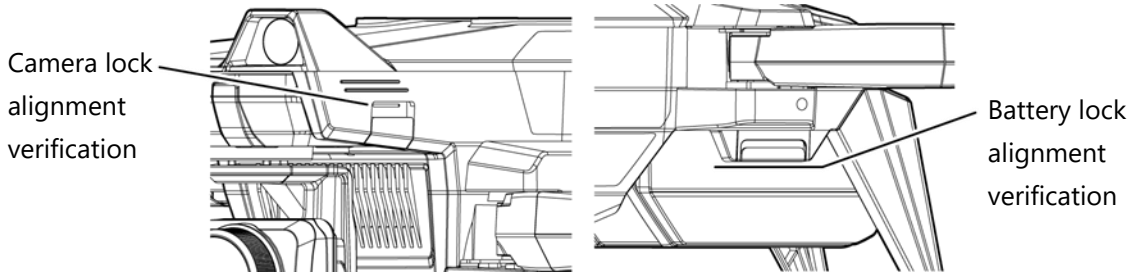


WARNING

- Flying with the camera mount not properly locked is extremely dangerous as the camera may fall during flight.
- The video feed from the camera may be displayed even when its mount is not properly locked. Do not judge the state of the lock from the video feed alone.
- Touching the camera mount release button may cause the camera mount lock to be unintentionally released.
- After confirming that the camera is installed and locked, be careful not to touch the camera mount release button. Double check that the camera mount is properly locked just prior to flight.

4. Press the battery power button to turn on the aircraft.

When power is supplied, the aircraft will produce a startup tone.

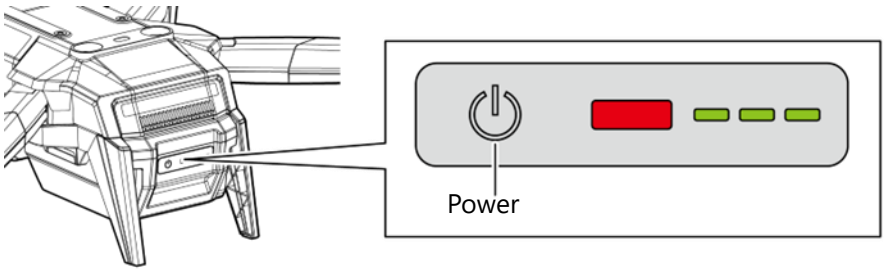


WARNING

Lasers operating with a wavelength outside the visible range (class 1 lasers) are emitted from two infrared sensors located on the top and bottom of the aircraft when the aircraft is powered on. Do not look closer than necessary or look into the lenses of the sensors when the aircraft is powered on.

5. The status LED will illuminate briefly immediately upon startup and will begin to blink continuously once the aircraft has completed its startup procedure.

Confirm that the aircraft LED blinks normally (no abnormality).


➔ See Section 6.1.5: Check the Status LED.

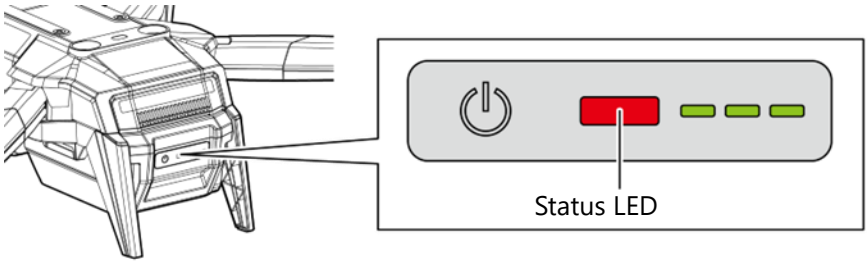

3.5. First Connection (binding)

3.5.1. Aircraft-Side Operation

1. Open the binding button cover on the fuselage.

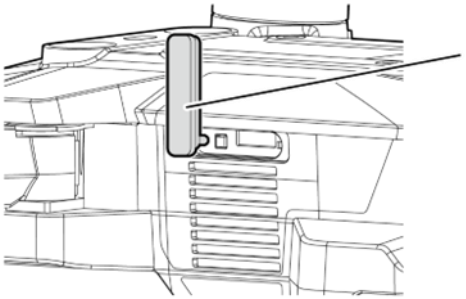


ADVISORY

Do not use sharp tools to open the cover. Doing so may result in damage to the aircraft.


2. Press and hold the binding button on the fuselage until all four position LEDs at the tips of the arms are blinking red.

The status LED blinks and the aircraft enters the binding standby state.

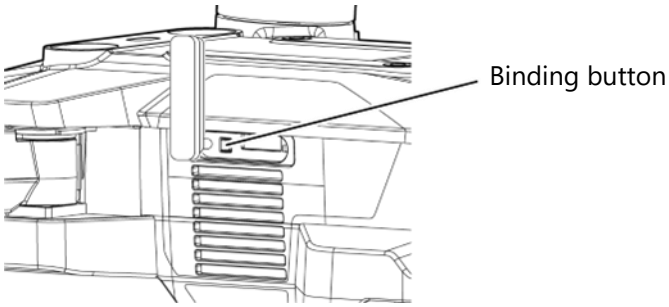


3.5.2. Radio-Controller-Side Operation

1. To access the controller system settings menu with the controller powered off, press the power button while holding down the Enter button. To access the menu while the controller is powered on, press the go-home button for 3 seconds.

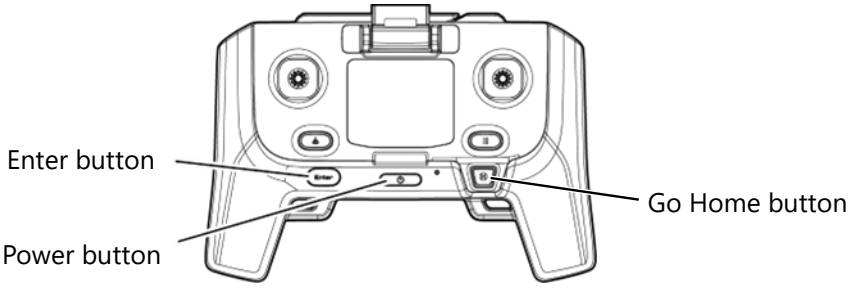


System settings menu




2. Move the cursor to "BIND" by operating the left stick on the controller and press the Enter button.


*Make sure that the aircraft is in binding standby mode before executing (see Section 3.5.1: Aircraft-Side Operation).

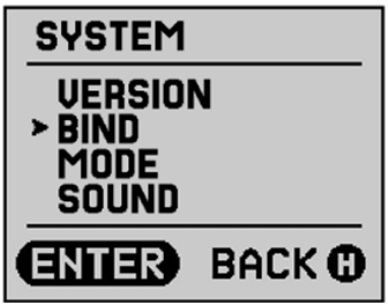

3. When RUN is displayed, press the Enter button again to execute binding.


Binding may take 1-2 minutes due to the encryption process.

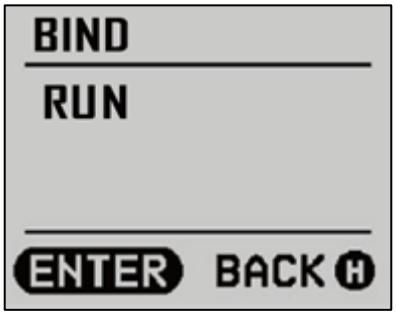


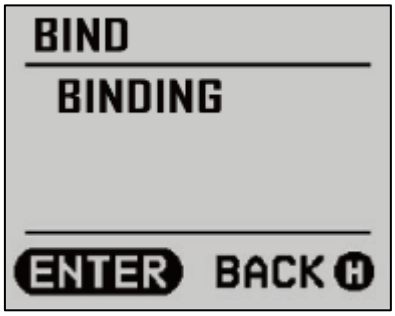


4. If binding is successful, "SUCCESS" will be displayed. If binding is not successful and "FAILURE" is displayed, repeat steps 1 through 3.

The controller retains only the binding information for the aircraft that it has most recently been bound with. When binding is performed with another aircraft, the binding information for the previously bound aircraft is deleted.

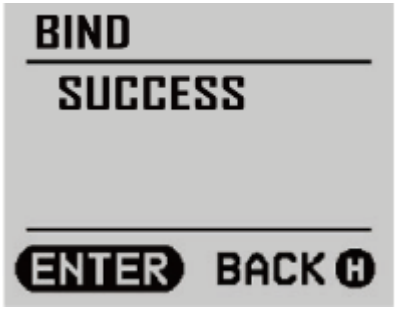


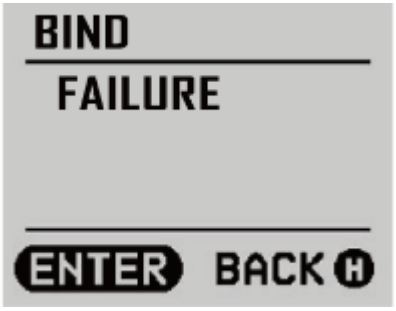

5. Press the Go Home button twice to exit the system settings menu.

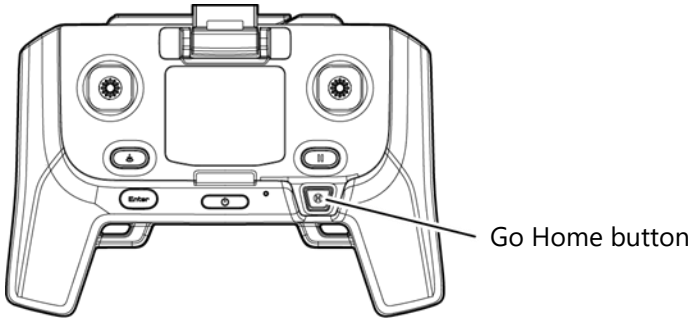

6. **Verify that the controller's LCD screen displays the aircraft's battery level and other information.**

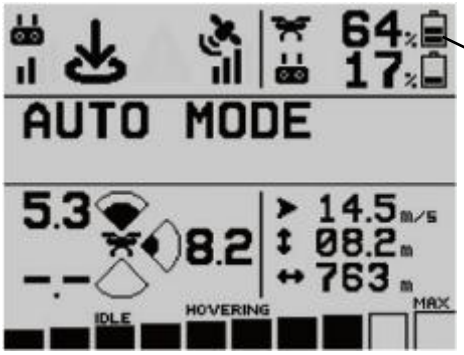

SOC	Remaining Battery
3	66% or more
2	33% or more
1	15% or more

SOC: State of Charge


3.6. Stick Mode Settings

- The controller stick control assignments can be selected from four control modes.
- Always check the control mode before flying to ensure that the stick operation assignments are the same as those you are accustomed to using. First-time users should carefully check the stick operation assignments according to the control mode before making settings.

WARNING


Do not operate the aircraft without checking the stick mode. Unintended movement of the aircraft may result in injuries or property damage.

3.6.1. Stick Mode Types

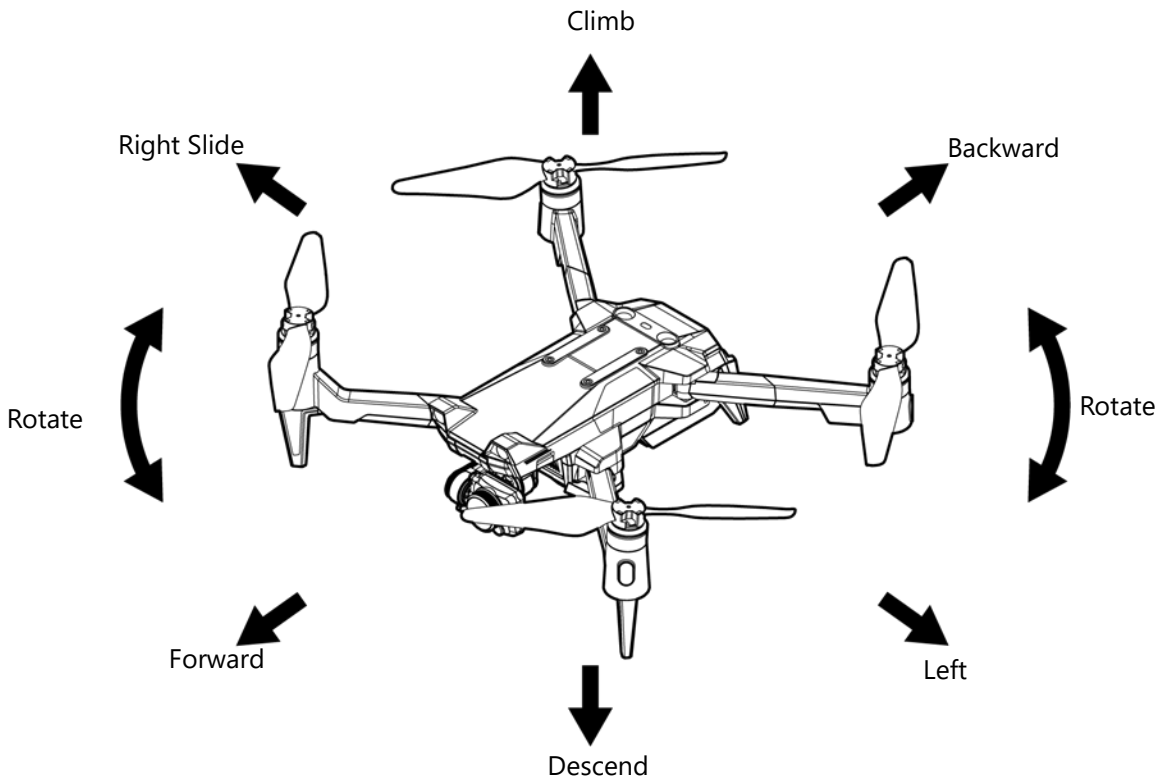


Climb/Descend: Throttle
Forward/Backward: Pitch
Slide Left/Right: Roll
Rotate Left/Right: Yaw

MODE 1

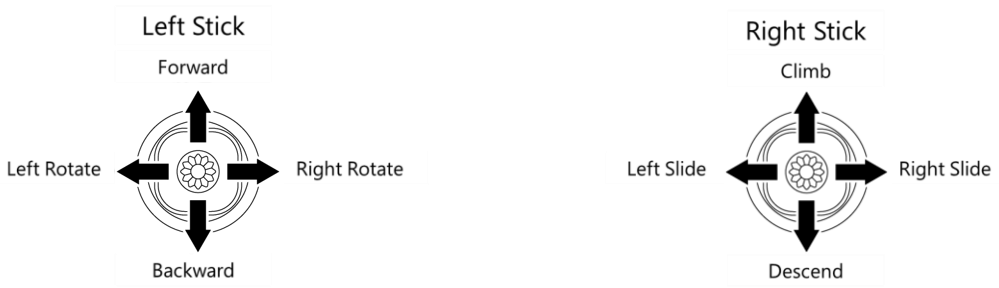

MODE 2

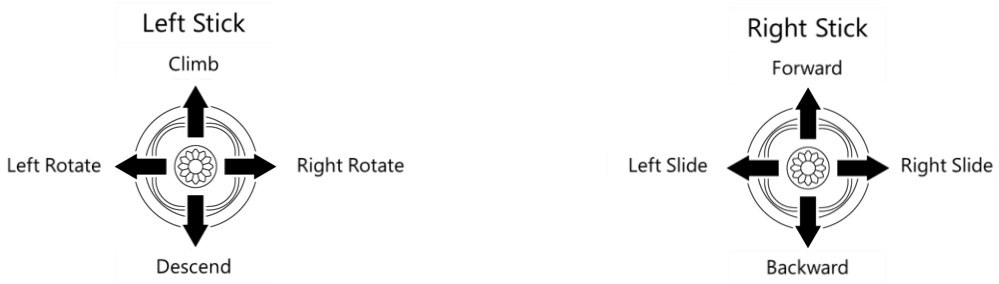

MODE 3




MODE 4



3.6.2. Changing Stick Mode


1. To access the controller system settings menu with the controller powered off, press the power button while holding down the Enter button. To access the menu while the controller is powered on, press the go-home button for 3 seconds.

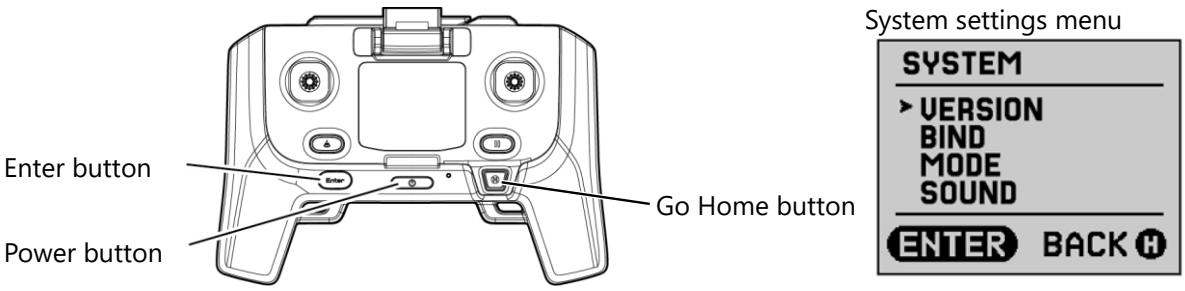

ADVISORY


While in flight, the controller will not switch to the system settings menu even if the go-home button is pressed for more than 3 seconds and control mode or other settings cannot be changed. The control mode may only be changed while the aircraft is on the ground. Pressing the go-home button while the controller is powered on during flight will activate Go Home mode.

2. Move the cursor to "MODE" by operating the left stick on the controller and press the Enter button.

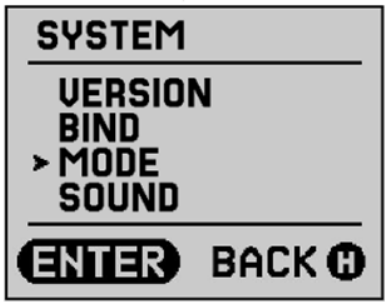


3. Move the cursor to the desired control mode and press the Enter button.

The highlighted item on the black background indicates the currently active mode.

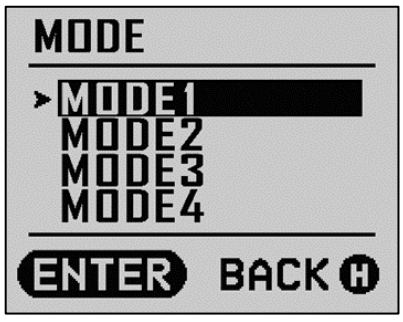

4. **Press the Go Home button twice to exit the system settings menu.**

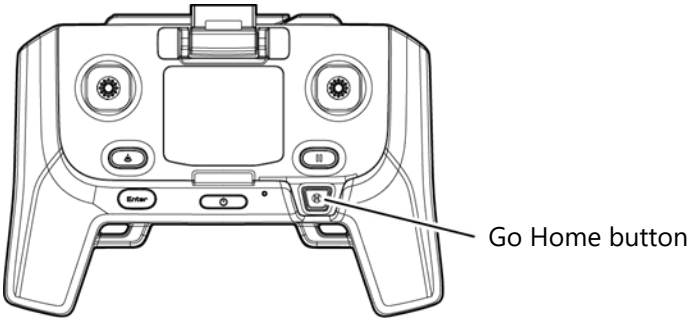

3.6.3. Confirming Stick Mode


WARNING

Check the operation of the stick mode with the propellers removed. Failure to do so may result in injury.


1. Starting the motors

Holding the throttle stick down and the yaw stick to the left releases the motor lock and the motors begin to turn.

In the case of mode 1

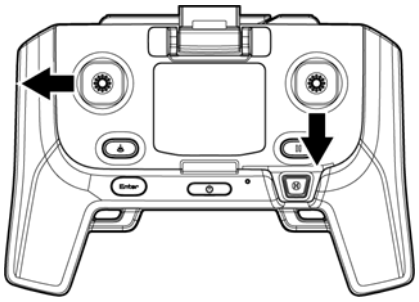

In case of mode 2

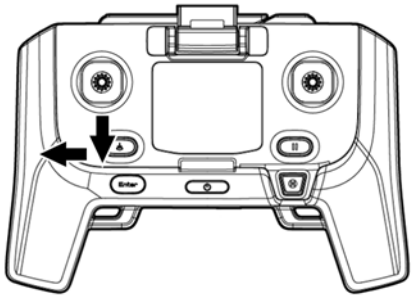

WARNING

Do not touch the rotating parts. Doing so may result in injury.


2. Confirmation of rotational operation

Check that the motor rotation operates as below picture.

➔ See Section .3.6.1: Stick Mode Types.

Clockwise rotation

Counterclockwise rotation

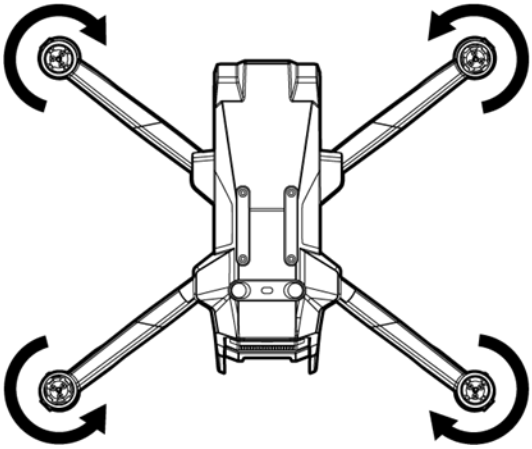

Counterclockwise rotation

Clockwise rotation


WARNING

Do not touch the motors immediately after operation. Doing so may result in burns.

3. Stopping the motors

Holding the throttle stick down will stop the motor.

MODE1

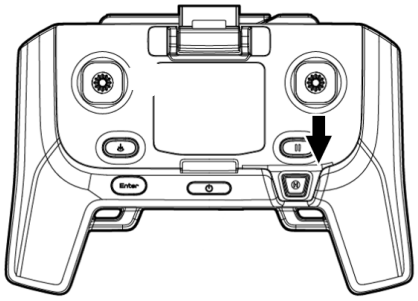


MODE2




*This stick input will not cause the motors to stop while in flight.

*Holding the throttle stick down and the yaw stick to the right (as was the method of stopping the motors in older versions of the aircraft firmware) will also stop the motors when on the ground.

MODE1

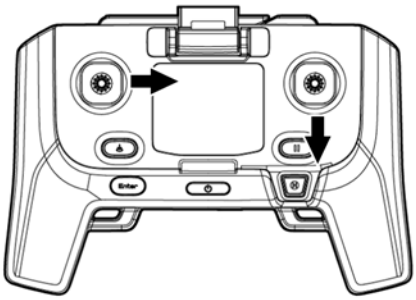

MODE2

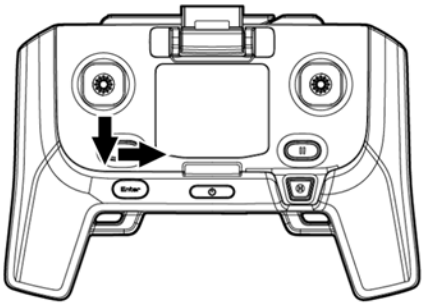


3.7. Propeller Installation


1. Turn off the power to the aircraft.

> WARNING
>
> Be sure to turn off the power to the aircraft before attaching or detaching the propellers. Failure to do so may result in injury.

2. There are two types of propellers, clockwise rotating and counterclockwise rotating. Like propellers are installed at opposite ends. Neither propeller type will interface with the mount at the wrong location.


Install the propeller while holding the base of the motor with your fingers to prevent it from rotating and holding the arm to prevent it from being strained.

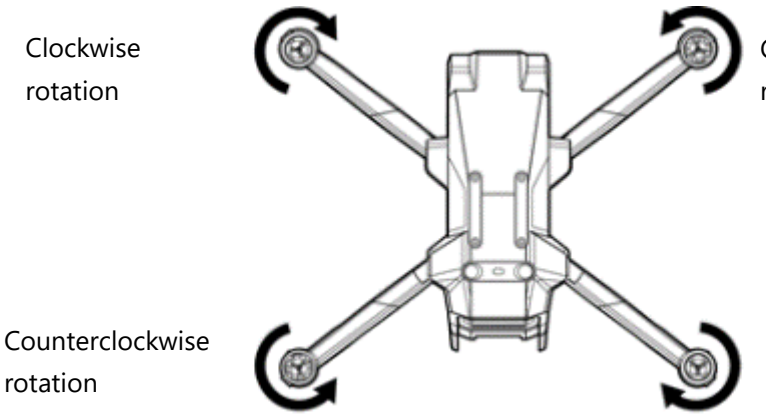

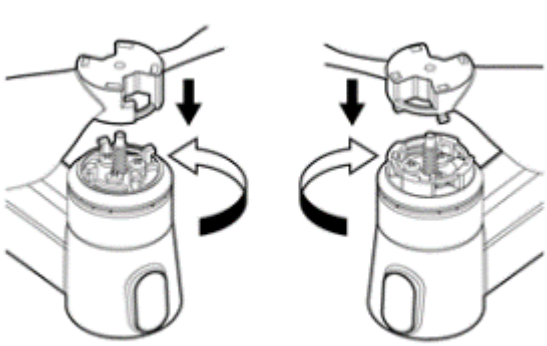

A: For clockwise propellers

B: For counterclockwise propellers

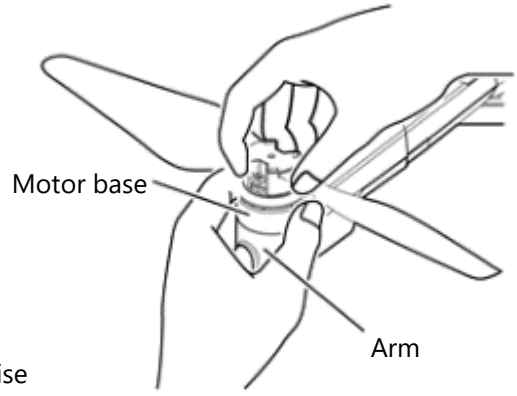

A: Align the protrusions of the propeller with the grooves on the motor and rotate it counterclockwise while pressing downward to lock it in place.

B: Align the grooves of the propeller with the protrusions of the motor and rotate it clockwise while pressing downward to lock it in place.

> WARNING
>
> The propellers are sharp. Be careful when attaching and removing them. The sharp edges can cut your hands or body.

3.8. Camera Initialization

1. Prepare a microSD card for image and video storage.

- The microSD card must meet the following criteria

  *Refer to the CX-GB100 User Manual for the recommended SD card.

  ✔ UHS Speed Class · · · · · · · · · · · · · · · U3
  ✔ Video speed class · · · · · · · · · · · · · · · V30 or higher
  ✔ Recording Capacity · · · · · · · · · · · · · · · Up to 512GB


- Initialize (format) the microSD card.

  Supported filesystem formats:

  ✔ FAT32
  ✔ exFAT

  * exFAT is recommended for microSD cards with a capacity of 32 GB or greater.

2. Insert the microSD card into the microSD card slot with the correct orientation (as shown in the illustration on the aircraft) until it locks into place.

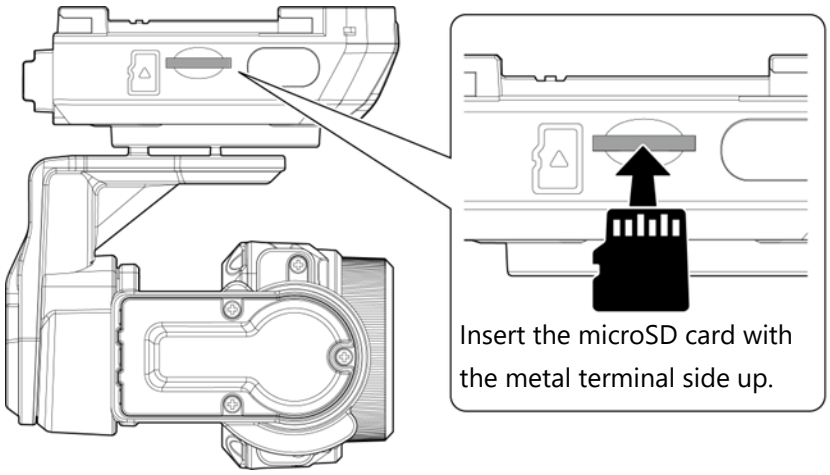

3. Attach the camera to the aircraft.

➔ See Section 3.4: Aircraft Preparation.

3.9. RTK Settings (Option)

By connecting the optional RTK-SOTEN unit to the aircraft, you can perform high-precision, RTK-assisted flight operations.

Prerequisites

- **RTK-SOTEN** unit
- **TAKEOFF App:** Version 2.4.1 or later
- **Aircraft Firmware (Nx):** Version 1.2.25 or later

RTK Correction Data Sources

To achieve centimeter-level positioning accuracy, the RTK-SOTEN unit requires a continuous stream of real-time kinematic (RTK) correction data via an NTRIP connection. This data can be sourced from a commercial network provider or a local base station:

- **Network RTK (NTRIP):** SOTEN-RTK is confirmed to work with major network correction services, including GEODNET and the Oregon Real-Time GNSS Network (ORGN). A third-party account or subscription is required to access these networks.
- **Local Base Station:** SOTEN-RTK is confirmed to work with the Emlid Reach RS2 base station. To use a local base station, configure the unit in Wi-Fi hotspot mode to enable local NTRIP streaming.


Ensure you have your NTRIP caster credentials (IP address, port, mount point, username, and password) ready before configuration.

RTK Configuration and Connection

Follow the steps below to configure the RTK correction data stream for flight.

> ADVISORY
>
> RTK positioning is not available unless the RTK-SOTEN unit is installed.
> Before configuring the settings, make sure that the RTK-SOTEN unit is properly installed.
> ➔ Refer to Section 5.7 "Pre-Flight RTK Inspection (Option)" for installation details.

1. **Power on the aircraft and the controller. Ensure the controller has pilot authority.**
2. **Launch the TAKEOFF application.**
3. **Verify that the RTK icon is displayed in the status bar at the top of the screen.**
4. **Ensure the aircraft is outdoors in an open area with a clear view of the sky, away from buildings, trees, and metallic obstructions.**
5. **Navigate to Settings > Drone > RTK in the TAKEOFF application.**
6. **Enter your NTRIP network credentials or local base station settings, then tap Start RTK.**

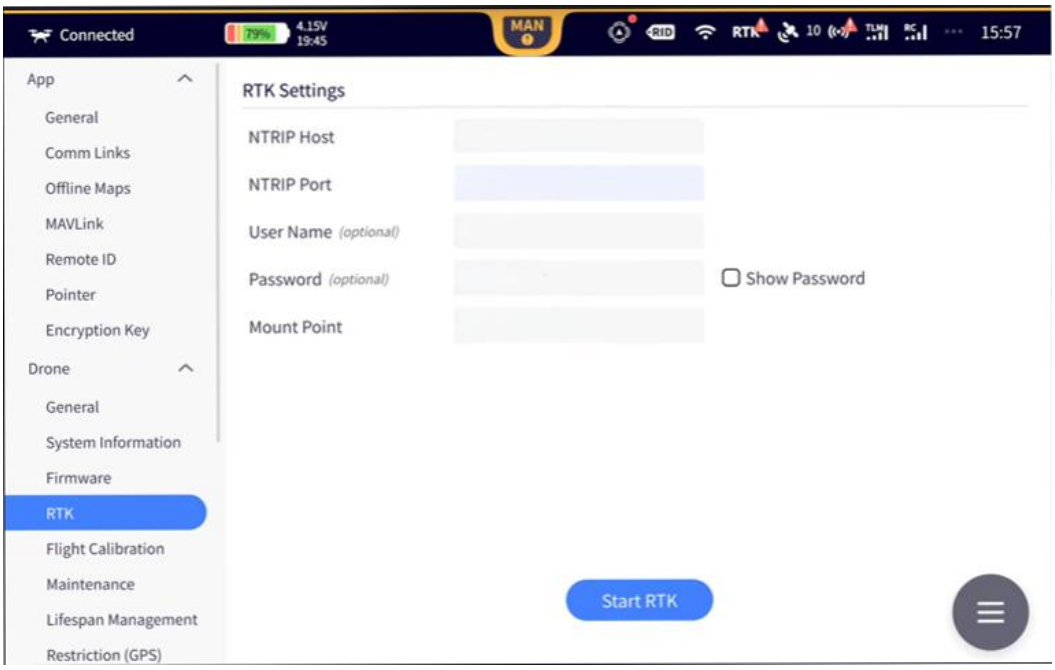

ADVISORY

Once you tap Start RTK, the configuration fields lock (gray out) within a few seconds. If you need to fix a typo or change settings, disconnect and reconnect the RTK-SOTEN unit (or power cycle the aircraft) to unlock the fields.

Your RTK credentials are saved locally on your controller device. They will persist even after the aircraft or TAKEOFF is restarted. However, if you switch to a different controller or mobile device, you must re-enter your credentials.

➔ Refer to Section 5.7 "Pre-Flight RTK Inspection (Option)" for installation details.

7. Verify the connection status.

- The RTK Start button will gray out and the button text will change to “Running”
- RTK Link status will change from “Off” to “Live”

8. Wait for RTK Status to change from “RTK Float” to “RTK Fix” before taking off.

Chapter 4

Pre-Flight Preparation

4.1. Pre-Flight Preparation Items 75
4.2. What You Need for Flight 76
4.3. Battery Charging 77
4.4. Controller Charging 79

4.1. Pre-Flight Preparation Items

- The following checks should be made prior to flight.
  - ✔ Batteries charged
  - ✔ Controller charged


4.2. What You Need for Flight


- The following protective gear and apparatus should be readied prior to flight:
  - ✔ Helmets
  - ✔ Protective goggles *recommended
  - ✔ Gloves of a thickness that does not interfere with manipulating the controls *recommended
  - ✔ Long-sleeved clothing (top and bottom) *recommended
  - ✔ Fire extinguishers, etc. (Refer to the 'Precautions for Fire Prevention' in Section 1.3.2: "Precautions for Battery Handling").
  - ✔ Internet access (for map data acquisition)

4.3. Battery Charging

4.3.1. Charging Method

- The status LED and the remaining battery LED light up (blink) according to the charging mode and charging starts.

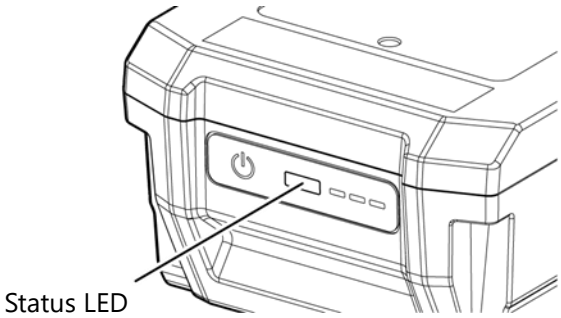

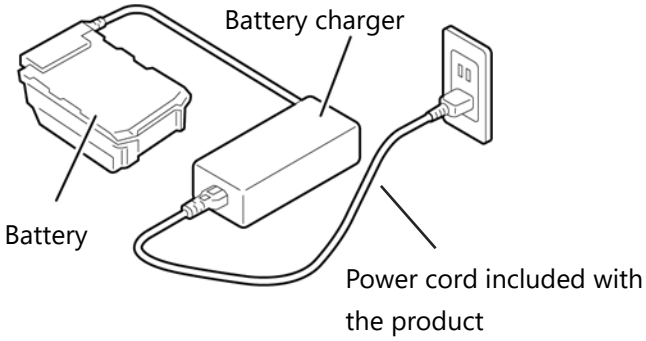

CAUTION



To maintain battery health, be sure to fully charge the battery before use.




4.3.2. Battery Charging Modes

- The battery's internal battery management system (BMS) automatically switches from normal charge mode to charge standby mode when the internal temperature of the battery is outside the safe temperature range for charging. For example, the internal temperature of the battery may be high immediately after a flight, and the BMS may switch to charge standby mode upon connection to a charger to prevent excessive battery performance degradation caused by charging at a high internal temperature.
- Whether charging has initiated, and whether it is in normal charge mode or charge standby mode, is indicated by the status LED.

Normal charge mode

In normal charge mode the battery is charged at the normal prescribed rate.

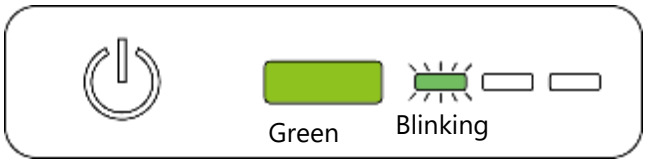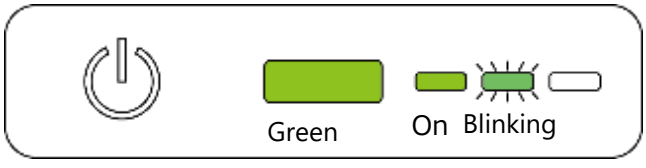
Status LED/Battery level LED	Battery level
	0-24%
	25-49%

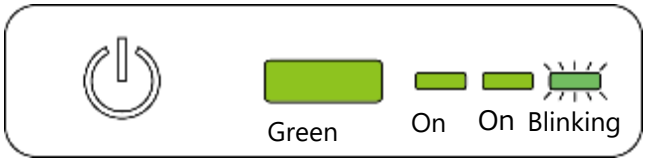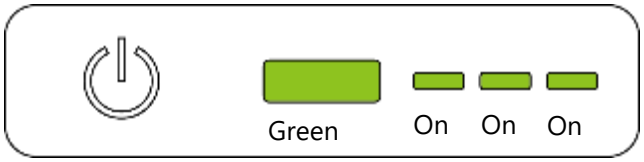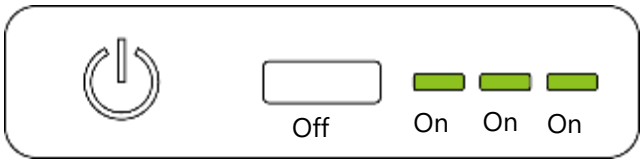	50-74%
	75-99%
	100%

Charge standby mode

In the charge standby mode, charging is suspended because the BMS has detected that the internal temperature of the battery is outside the safe temperature range for charging. Charging is resumed when the temperature returns to the safe range for charging. Even after charging has started, the internal temperature of the battery may exceed the safe range due to exposure to direct sunlight or other factors. In this case the BMS will again switch to charge standby mode and charging will be suspended until the temperature returns to the safe range for charging.


LED indication in charge

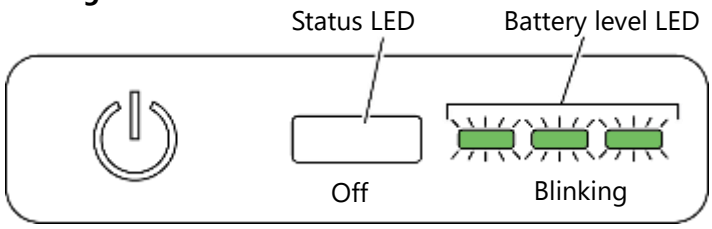


4.4. Controller Charging

4.4.1. Charging Method

Connect the controller to a commercially available USB compliant charger or other charging-capable device via USB Type-C®. The controller's status LED turns orange to indicate charging.

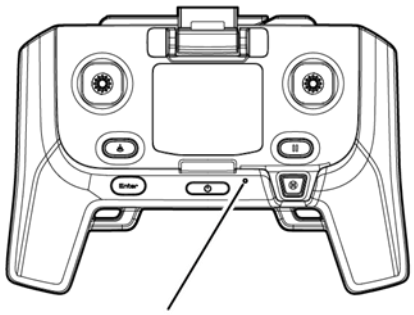

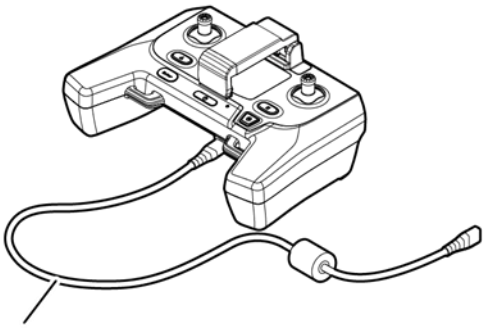


ADVISORY

- For charging, the USB Type-C® charging cable should be connected to the charging port at the bottom of the controller, not to the mobile device connection port at the top of the controller. The controller will not charge if the charger is connected to the mobile device connection port.
- Chargers that are not compliant with the USB BC standard (Battery Charging Specification 1.2) may not charge the controller properly.
- The dedicated USB Type-C® charging cable that is included with SOTEN may not work with some commercially available USB PD chargers that are capable of fast charging.

4.4.2. LCD Display While Charging (only when powered on)

When the controller is powered on while charging, the LCD screen displays the charging status.

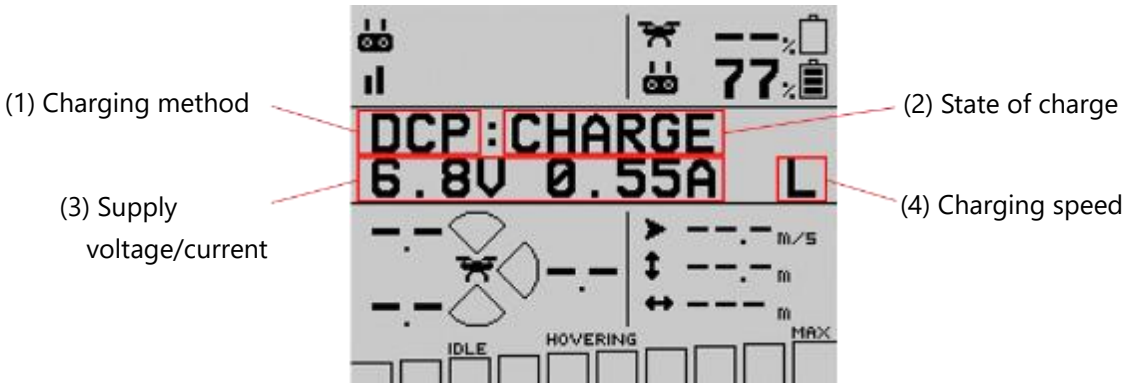

About the charging method

The controller identifies the charging method of the charger and displays the name of the charging method; the maximum current during charging is adjusted according to the identified charging method in accordance with the USB charging standard "Battery Charging Specification 1.2".

Charging method name	Details
SDP	Charging via a normal USB communications port on an electronic device (max. 5V 0.5A)
CDP	Charging a USB communications port that is also equipped for charging (max. 5V 1.5A)
DCP	Charging via a dedicated USB charging port (max. 5 V 1.5 A)
CHG1	Standard charger or equivalent (max. 5 V 2.4 A), except as noted above
CHG2	Charger that is not capable of the above current (max. 5V 1.0A)

State of Charge

Displays controller charge status.

State of charge	Contents	Details
WAIT	Waiting to charge	Low or high temperature, waiting for acceptable battery temperature.
REPAIR	Over-discharge repair charging	The controller is attempting to restore its battery, which has reached an extremely low level of charge.
PRECHG	Pre-charge diagnostics	The controller is performing diagnostics on the battery prior to initiating charging.
CHARGE	Charging	Normal state of charge.
FULL	Charge complete	Charging is complete.

Supply voltage/current to internal battery

Displays the voltage and current supplied to the internal battery. Note that the voltage and current in this display are not the input voltage and current from the USB port.

Charging speed limit indication

The letter “L” is displayed when the charger has reached the upper limit of the power it can supply and the controller is limiting the current consumed to protect the charger. Note that this will also be displayed when the input power has reached the maximum allowable for the active charging method, regardless of whether the charger is capable of supplying more power.

④

Chapter 5

Pre-Flight Inspection

5.1. Pre-Flight Inspection 83
5.2. Pre-Flight Battery Inspection 84
5.3. Pre-Flight Aircraft Inspection 85
5.4. Pre-Flight Propeller Inspection 90
5.5. Pre-Flight Controller Inspection 91
5.6. Pre-Flight Camera Inspection 94
5.7. Pre-Flight RTK Inspection 96

5.1. Pre-Flight Inspection

Perform the following inspections prior to flight.

1. Pre-Flight Battery Inspection

- Confirm level of charge 5-2-1
- Inspect exterior 5-2-2

2. Pre-Flight Aircraft Inspection

- Inspect exterior 5-3-1
- Inspect battery terminals and locking mechanism 5-3-2
- Inspect camera terminals and locking mechanism 5-3-3
- Inspection air intake 5-3-4
- Inspect motors 5-3-5
- Inspect propeller mounts and arms 5-3-6
- Inspect arm locking mechanisms 5-3-7
- Inspect camera and battery lock status 5-3-8
- Confirm flight conditions/limitations 5-3-9
- Inspect stereo cameras and infrared sensors 5-3-10

3. Pre-Flight Propeller Inspection

- Inspect propellers 5-4-1

4. Pre-Flight Controller Inspection

- Confirm level of charge 5-5-1
- Confirmation controller binding 5-5-2
- Confirm the stick mode 5-5-3
- Confirm signal strength 5-5-4
- Determine optimal antenna direction 5-5-5
- Confirm antenna position 5-5-6

5. Pre-Flight camera inspection

- Confirm startup 5-6-1
- Confirm video transmission 5-6-2
- Confirm gimbal operation 5-6-3

5.2. Pre-Flight Battery Inspection

CAUTION

If any abnormality is found during the battery inspection, do not use it for flight. Contact your dealer.

5.2.1. Confirm Level of Charge


- Ensure that the battery is fully charged (100%).
  ➔ See Section 4.3: Battery Charging.

CAUTION

Always fully charge the battery before installing it onto the aircraft for flight.

5.2.2. Inspect Exterior

- Verify that there are no cracks or other damage to the mounting hooks and that they are not deformed.
- Verify that there are no debris in or around the battery terminals.
- Verify that there are no cracks or other damage or deformation near the terminals.

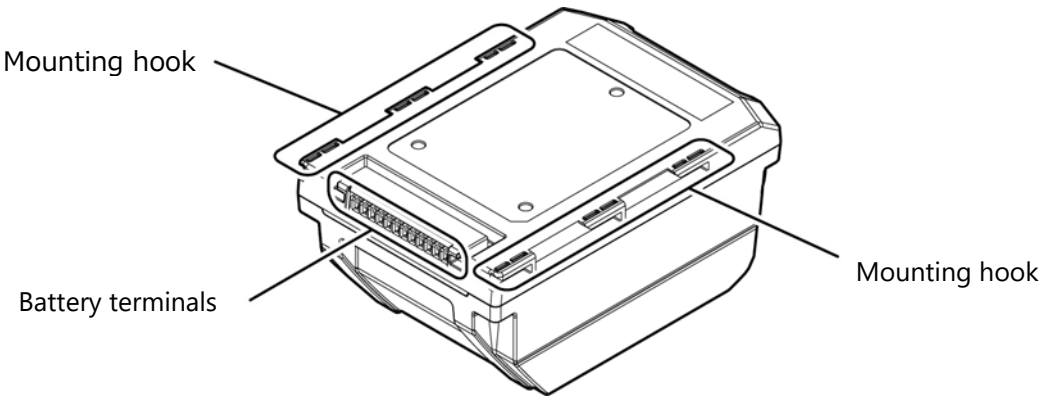

5.3. Pre-Flight Aircraft Inspection

CAUTION


If any abnormality is found during the aircraft inspection, do not fly the aircraft. Contact your dealer.
Pre-flight inspections of the aircraft should be performed with the aircraft powered off.

5.3.1. Inspect Exterior

- Verify that there are no cracks, scratches, or other damage or deformation on the exterior of the aircraft.
- Deploy the arms and verify that they do not tilt or wobble when placed on level ground.


5.3.2. Inspect Battery Terminals and Locking Mechanism

- Verify that there is no deformation or rattling near the battery terminals or in the locking mechanism. Perform the inspection with the battery removed from the aircraft.
- Verify that there are no cracks, deformation, or other damage or debris near the terminals.
- Verify that there are no cracks, deformation, or other damage or debris near the locking mechanism.

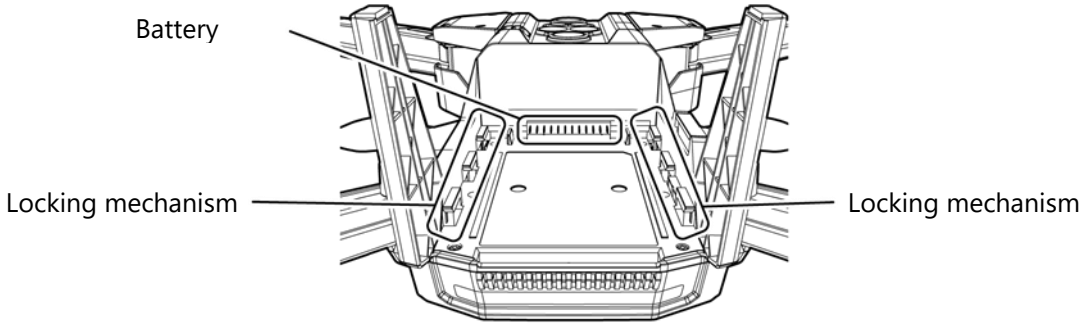


5.3.3. Inspect Camera Terminals and Locking Mechanism

- Verify that there is no deformation or rattling near the camera terminals or in the locking mechanism. Perform the inspection with the camera removed from the aircraft.
- Verify that there are no cracks, deformation, or other damage or debris near the terminals.
- Verify that there are no cracks, deformation, or other damage or debris near the locking mechanism.

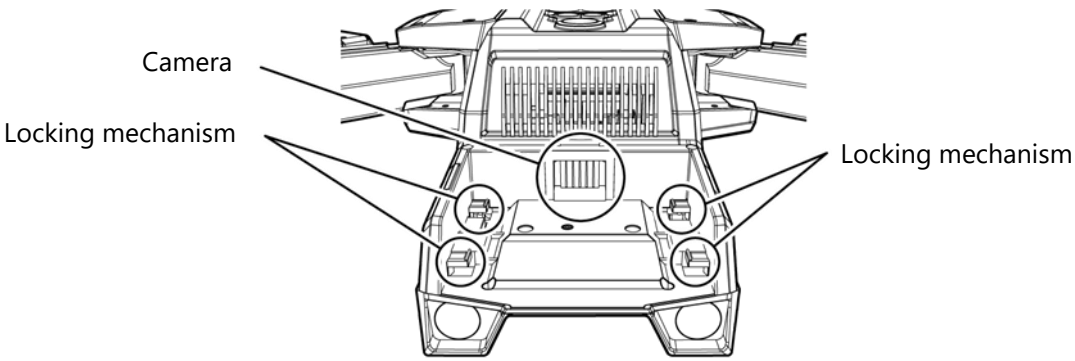


5.3.4. Inspect Air Intake

- Verify that there is no debris adhering to the air intake port, which is located at the front of the aircraft, just under the camera terminals. Perform the inspection with the camera removed from the aircraft.

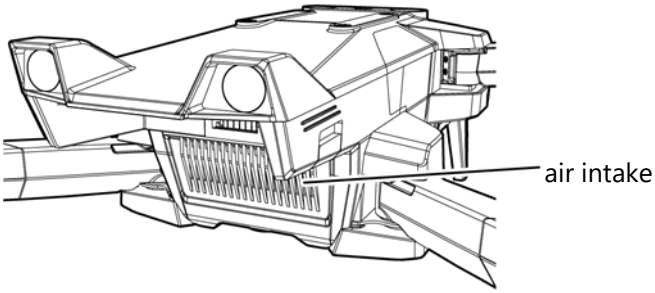

5.3.5. Inspect Motors


- Verify that the motors are not damaged or deformed.
- Turn all motors by hand and verify that they all turn with about the same resistance.
- Verify that the motors are securely fastened to the arm and are not rattling.
  Compare all 4 motors to confirm that there are no significant differences.

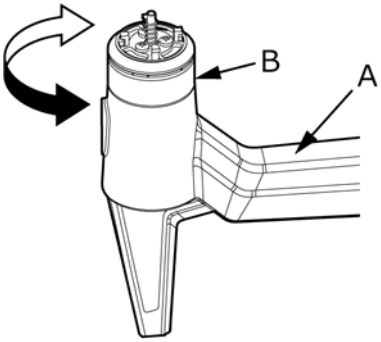


Hold part A and move part B

5.3.6. Inspect Propeller Mounts and Arms

- Verify that there are no cracks or deformation on the arms.
- Verify that there are no cracks, chips, deformation, debris, or other contamination of the propeller mounts.
- Verify that the springs attached to the motor shaft are not deformed or contaminated with debris.
- After mounting the propellers, verify that they are not loose or rattling.

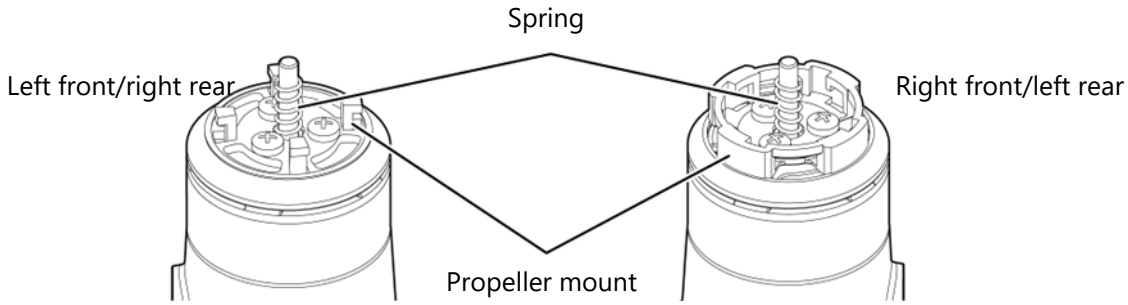


- For the left front and right rear motors, verify that the angles of the 4 propeller mounting hooks are vertical (Angle A in the figure below).
- For the right front and left rears motors, verify that there are no indications of contact or melting on the top surface of the propeller mounts (Plane B in the figure below).
- For the right front and left rears motors, check that there are no contact marks in the propeller mounting grooves (Groove C in the figure below).

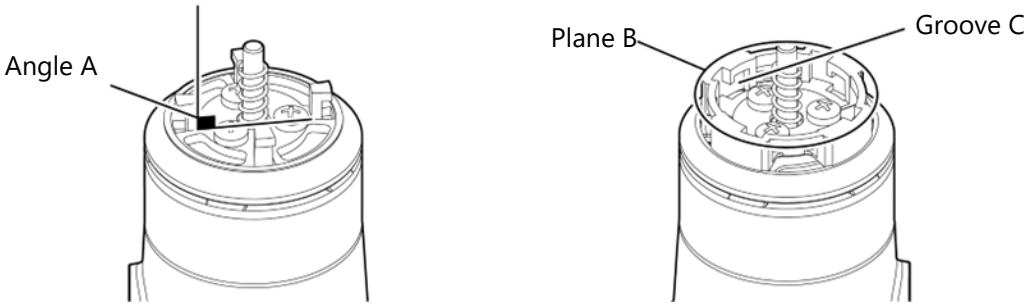

5.3.7. Inspect Arm Locking Mechanisms

- Open the arms completely until an audible click is heard. Check that there is no rattling of the arms.

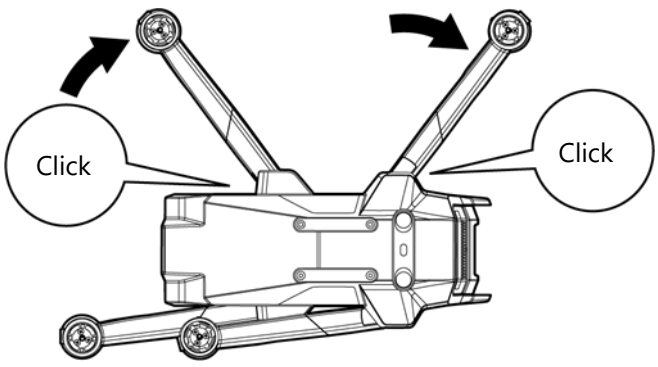


WARNING

An arm that is not fully open may move due to the normal accelerations of the motor during flight, severely impairing the ability of the aircraft to control its attitude, possibly resulting in a crash.

5.3.8. Confirm Camera and Battery Lock Status

- The camera release button has a lock confirmation line that visually indicates the lock is engaged. If this line is not visible, then the lock is not fully engaged. The battery release button does not have a lock confirmation line, but lock engagement can be confirmed by verifying that the bottom of the button is aligned with the aircraft structure behind it.
- Before flying, visually check both lock lines to make sure they are not half-locked.

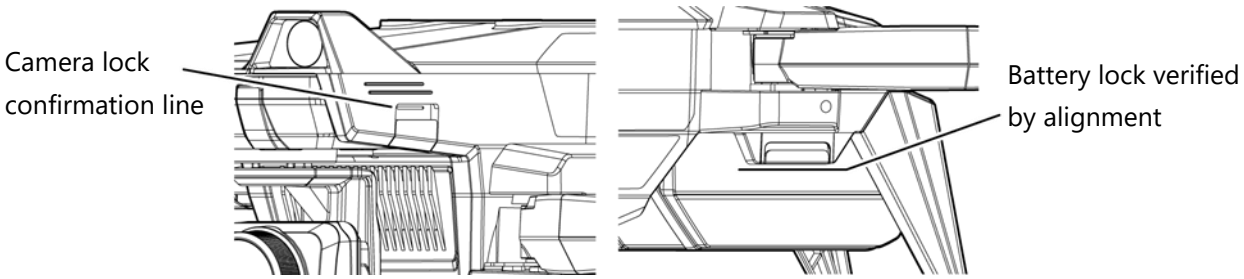

WARNING

If the battery is not securely locked, it may fall out during flight, resulting in a crash.


5.3.9. Confirm Flight Conditions/Limitations

- Check the applicable payloads user manuals for flight conditions and limitations with or without payloads prior to flight.
- Whenever payloads (including optional items) are loaded onto the aircraft, make sure that total takeoff weight of the aircraft does not exceed 2,000 g (4.4 pounds).

5.3.10. Inspect Stereo Cameras and Infrared Sensors

Check the lenses of the three pairs of stereo cameras mounted at the front, top, and bottom of the aircraft and the two infrared sensors mounted at the top and bottom of the aircraft for scratches and dirt. If there is dirt, gently wipe it off with a soft, clean cloth.

- Check the lenses of the three pairs of stereo cameras for fingerprints, fogging, scratches, cracks, or deformation.
- Check the lenses of the two infrared sensors for fingerprints, fogging, scratches, cracks, or deformation.

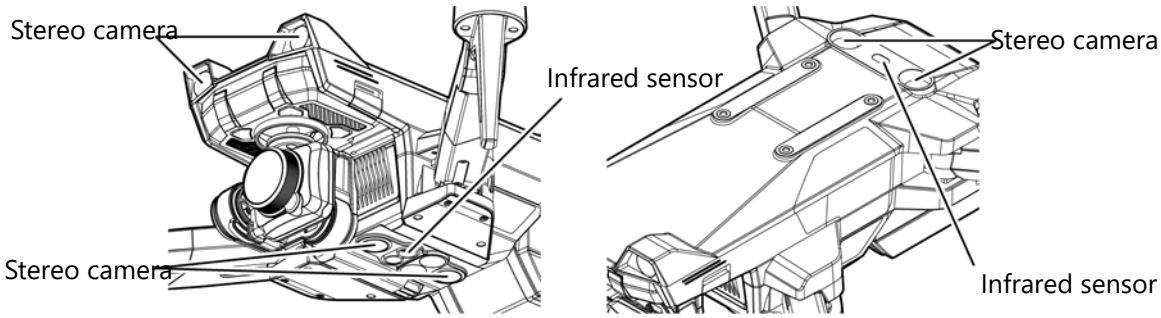


5.4. Pre-Flight Propeller Inspection


> CAUTION
>
> If any abnormality is found with a propeller during inspection, do not use it for flight. Contact your dealer.

5.4.1. Inspect Propellers

- Check the propellers for cracks, chips, deformation, dirt, or other contamination.
- Ensure that there is no damage or wear on the blade tips.

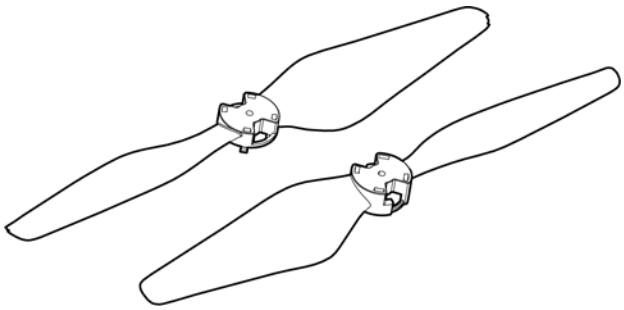

- For the counterclockwise propellers, verify that the angles of the 4 propeller mounting hooks are vertical (Angle A in the figure below).
- For the clockwise propellers, verify that there are no indications of contact or melting on the bottom surface of the propellers (Plane B in the figure below).
- For the clockwise propellers, check that there are no contact marks in the propeller mounting grooves (Groove C in the figure below).

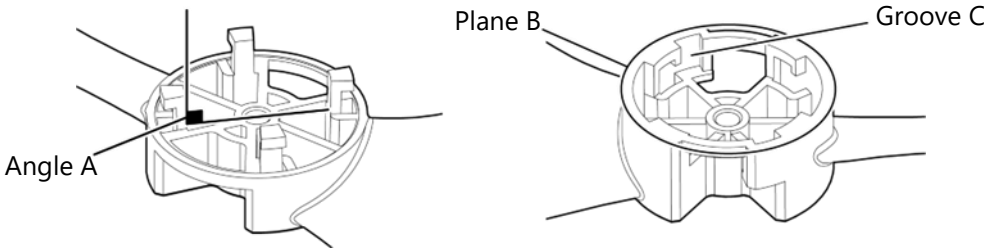

5.5. Pre-Flight Controller Inspection

CAUTION

If any abnormality is found during the controller inspection, do not use if for flight. Contact your dealer.

5.5.1. Confirm Level of Charge

- Ensure that the controller battery is fully charged.
  ➔ Refer to Section 4.4: Controller Charging.

CAUTION

If the controller's battery runs out, the aircraft will detect the loss of communication with the controller and go into emergency mode.
➔ Refer to Section 7.1.4: "Emergency Menu" for details.

5.5.2. Confirm Controller Binding

- When the controller and the aircraft are turned on, "ESTABLISHING CONNECTION" is displayed on the controller and the controller status LED blinks green. Connection to the aircraft is made automatically.
- When "SUCCESS" is displayed on the controller and the controller status LED becomes solid green, the connection between the controller and the aircraft is complete.

ADVISORY

- If the status LED is blinking red, communication with the aircraft has been lost. If, after some time, connection cannot be established, restart the controller and aircraft.
- If the aircraft is bound to more than one controller, "TO BE PILOT PUSH ENTER" will be displayed. Press and hold the ENTER button on the desired controller to acquire pilot authority.


Notification	Processing details
ESTABLISHING CONNECTION	Checking the connection between the aircraft and the controller.
TO BE PILOT PUSH ENTER	The aircraft is soliciting for a pilot.

5.5.3. Confirm the Stick Mode

- Always check the control mode before flying to ensure that it is set to the pilot's preferred mode.
  ➔ Refer to Section 3.6 .Stick Mode Settings.

5.5.4. Confirm Signal Strength

- Verify the lack of wireless interference between the controller and aircraft by performing the following test procedure. With the antennas folded in the stowed position, confirm that the camera video stream can be received smoothly at approximately 50 m (160 ft) from the aircraft.
- Remember to deploy the antennas after completing the signal strength check.

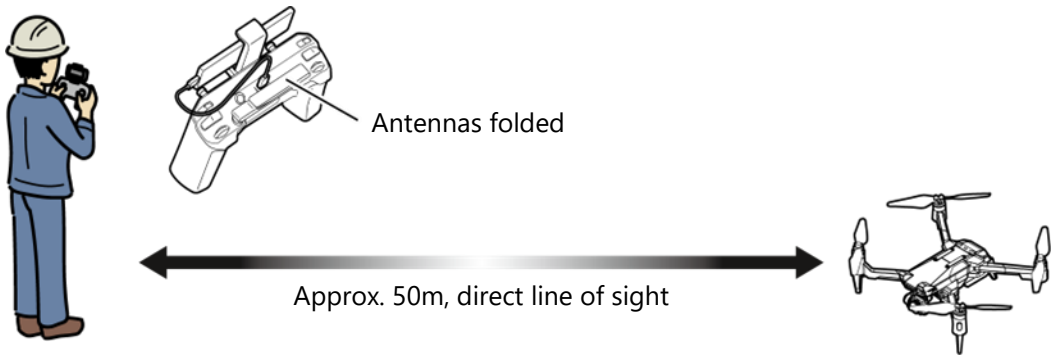


CAUTION

Beware of radio interference when other UAS are flying in the vicinity or when in the vicinity of other 2.4 GHz devices (such as Wi-Fi).


5.5.5. Determine Optimal Antenna Direction

- The antennas are directional; radio waves are transmitted and received most strongly in the direction that is perpendicular to the plane of the antennas.
- Referring to the figure below, communication with a distant aircraft tends to be more stable in state B than in state A in the figure below. Configuration B is recommended when the aircraft and controller are far from each other.

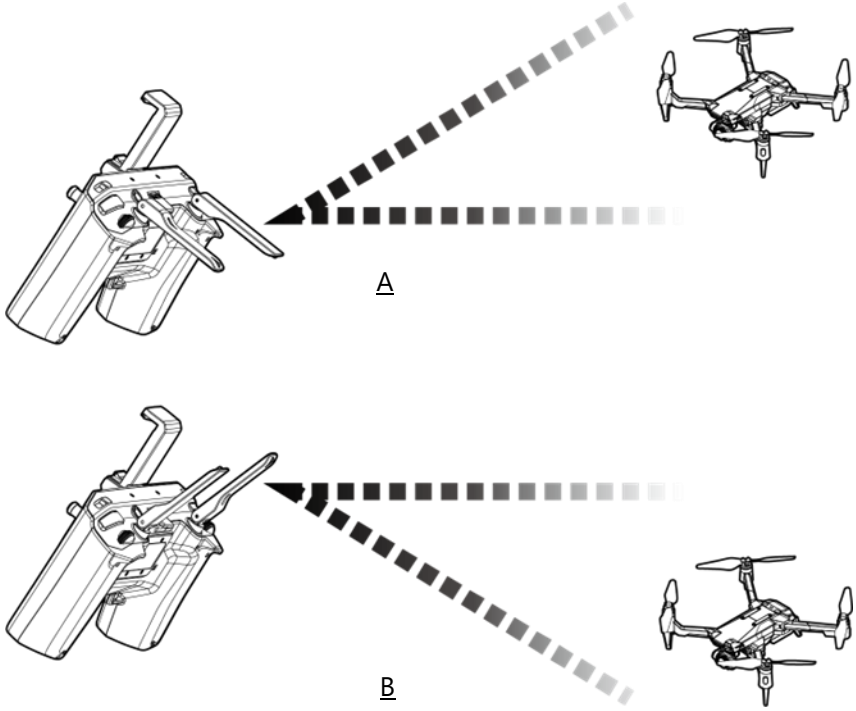


5.5.6. Confirm Antenna Position

- The two antennas must be deployed so that they are parallel.

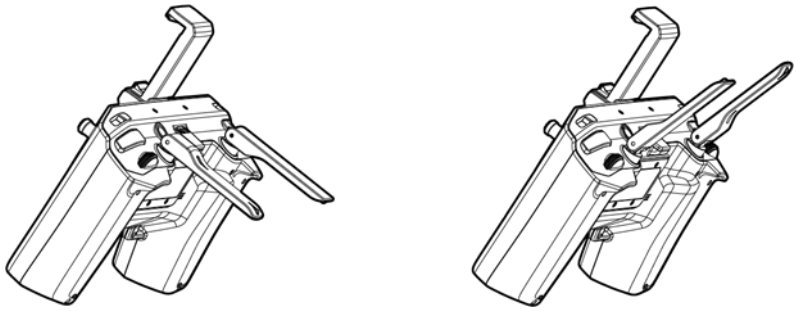


CAUTION

Antennas that are folded or not deployed in parallel may cause unstable communication between the aircraft and the controller.

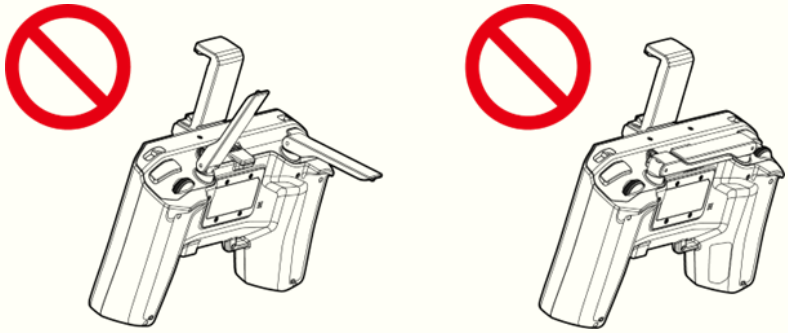

- The 2.4GHz band used for communication between the controller and the aircraft is capable of high-bandwidth data communication, but it is easily obstructed by obstacles between the controller and the aircraft.

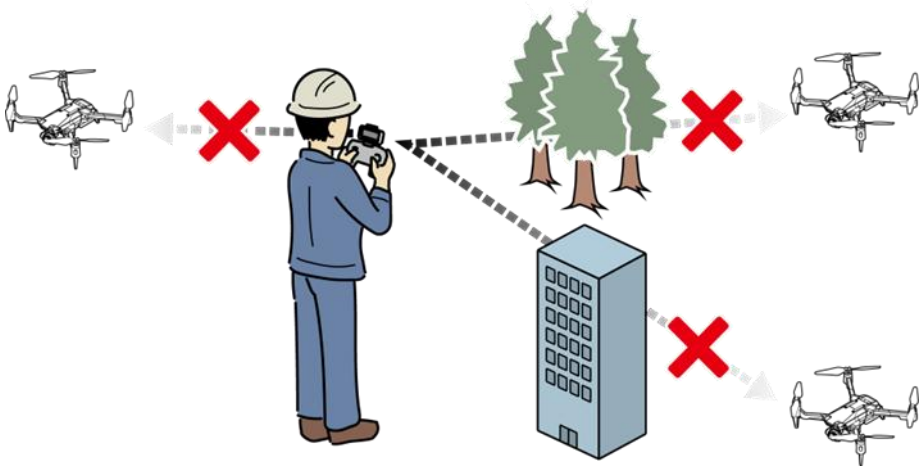

CAUTION

- Objects blocking the line of sight between the aircraft and the antennas may disrupt communication.
- If the aircraft is flown behind the pilot, the pilot themself may obstruct communications. To maintain communications, the pilot should turn so that the controller always has an unobstructed line of sight to the aircraft.

5.6. Pre-Flight Camera Inspection

ADVISORY

For details on camera/gimbal operation with the ACSL TAKEOFF ground control application, refer to the ACSL TAKEOFF ground control application User Manual.

5.6.1. Confirm Startup


- The gimbal performs a self-calibration when the aircraft is started up.
- After self-calibration is completed, confirm that the gimbal holds a forward-facing orientation.

ADVISORY

If, during calibration, the gimbal touches the ground or other obstacle, calibration will fail, the gimbal will not function properly, and the "Gimbal init. error" message will be displayed. When starting up the gimbal, place the aircraft on a flat, level surface.

5.6.2. Confirm Video Transmission


- Connect the ACSL TAKEOFF ground control application to the controller and confirm that the live video feed is displayed.

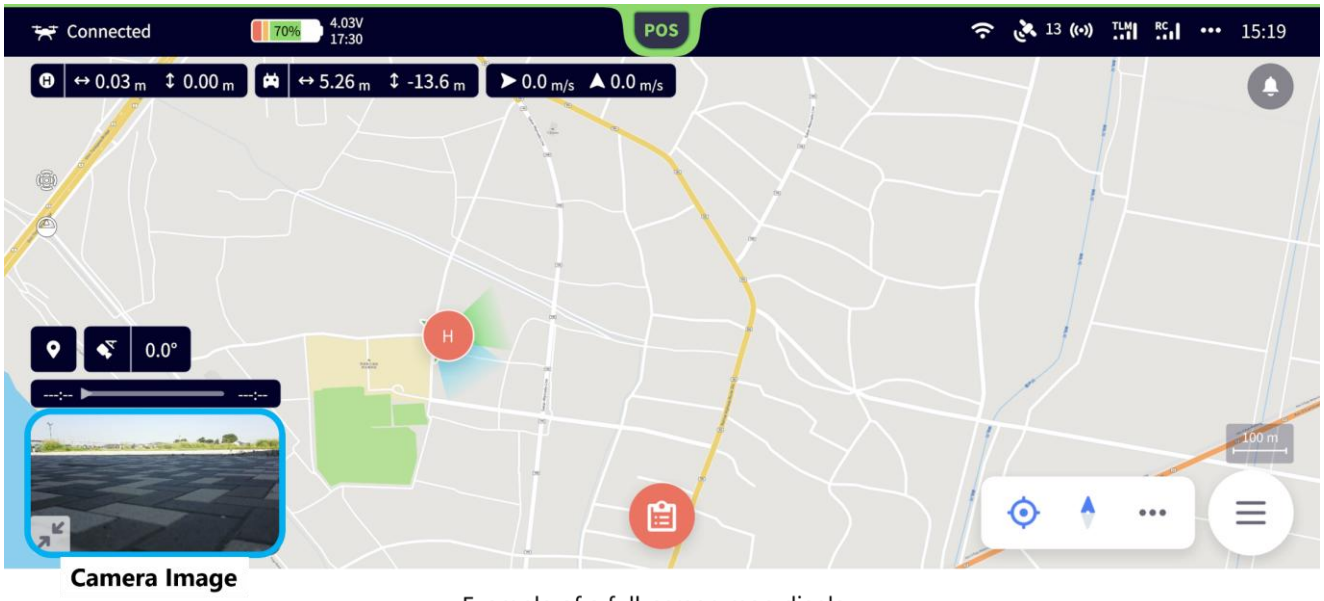

Example of a full-screen map display

5.6.3. Confirm Gimbal Operation

- Check that the controller's left gimbal control wheel operates the gimbal tilt.
- Check that the controller's right gimbal control wheel operates the gimbal pan.

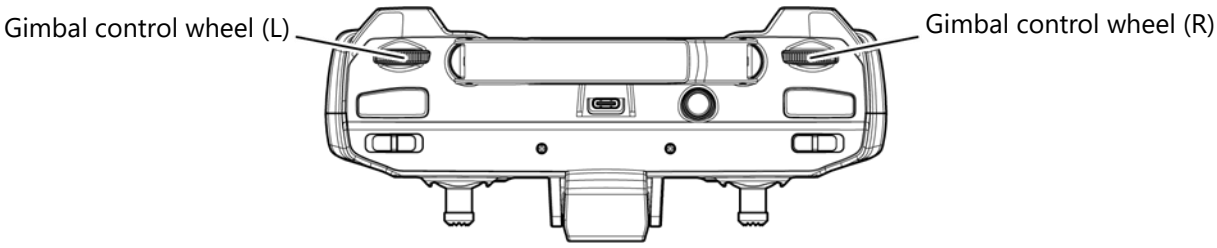

5.7. Pre-Flight RTK Inspection (Option)

5.7.1. Installation of the RTK-SOTEN Unit

1. **Install the RTK-SOTEN unit on the SOTEN aircraft.**
   Unfold all four arms of the aircraft and attach the RTK-SOTEN unit to the SOTEN aircraft. Using the supplied hex wrench, tighten the four mounting screws. After installation, make sure that the RTK-SOTEN unit is securely attached and does not wobble or move.

2. **Install the silicone boot.**
   Fit the silicone boot over the USB-C connector and ensure that the boot is fully seated.

   Important
   Always install the silicone boot. It serves the following purposes:
   - Provides water and dust protection for the aircraft's USB port.
   - Reduces vibration at the USB cable connector and helps prevent the connector from becoming disconnected due to vibration.

3. **Connect the USB connector to the aircraft.**

CAUTION

Always insert the USB-C connector straight into the port and ensure that it is fully seated.
If the connector becomes disconnected during flight, the aircraft may lose the ability to navigate and could crash.

ADVISORY

Insert the connector until a distinct click is felt.


If the click is difficult to detect, disconnect and reconnect the connector several times to familiarize yourself with the clicking sensation and confirm proper engagement.

5.7.2. Checking the Positioning Status

Ensure that the RTK-SOTEN unit is receiving correction data.

➔ Refer to Section 3.9 "RTK Settings (Option)."

Confirm that the RTK icon in the TAKEOFF application is displayed without an exclamation mark, indicating that RTK positioning is active and a fix has been obtained.

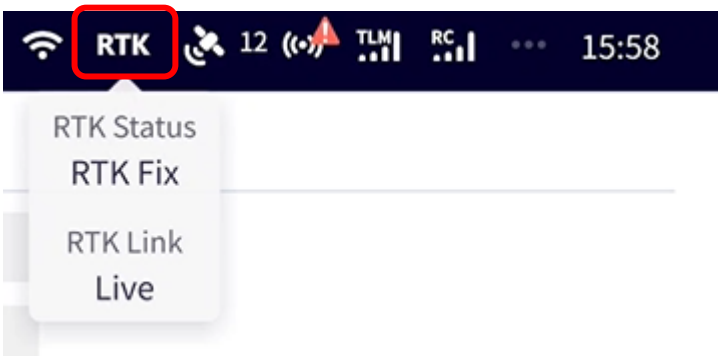

ADVISORY

The aircraft can be flown even when the RTK status is not RTK Fix. However, to ensure the use of high-accuracy positioning data, verify that the RTK status is RTK Fix both before takeoff and throughout the flight.

Chapter 6


Normal Operating Procedures

6.1. Test Run 99
6.2. Basic In-Flight Operations 105
6.3. In-Flight Functions 113
6.4. Controller Multicast 130
6.5. Lesson Mode (Japan only) 132
6.6 Regional Market Geofence 134
6.7 RTK Flight (Option) 137

6.1. Test Run

6.1.1. Verify Motor Start and Stop Procedure

- Before the first flight of the day, briefly start then stop the motors to confirm correct setting of the stick mode and operation. Refer to Section 3.6.3 Confirming Stick Mode.

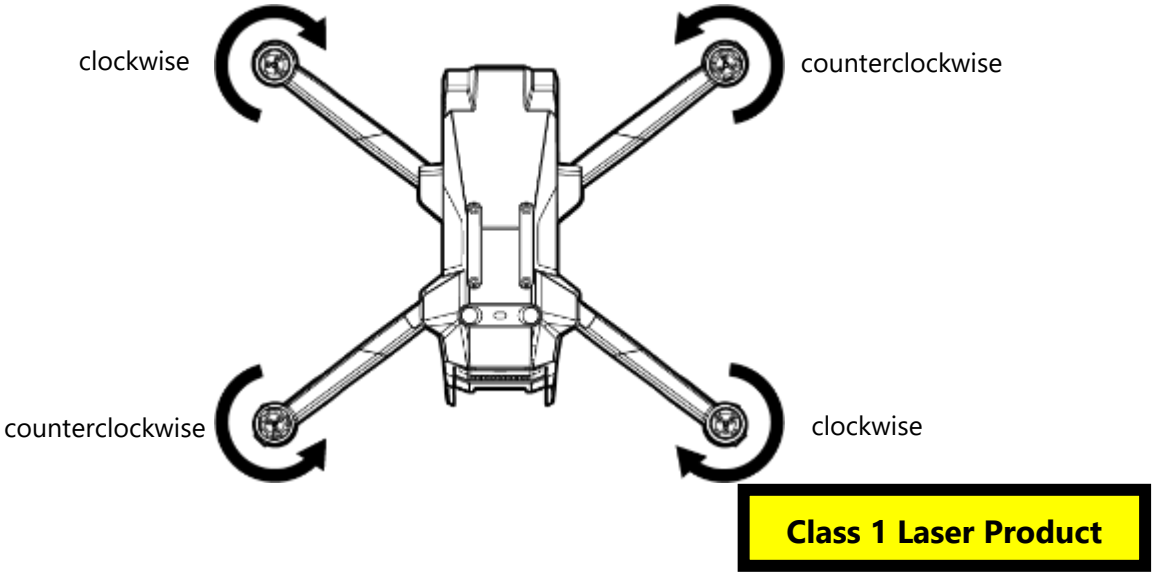

WARNING

Lasers operating with a wavelength outside the visible range (class 1 lasers) are emitted from two infrared sensors located on the top and bottom of the aircraft when the aircraft is powered on. Do not look closer than necessary or look into the lenses of the sensors when the aircraft is powered on.

ADVISORY

- During startup, do not bump or tilt the aircraft until startup is complete as this may interfere with the startup calibration of the on-board sensors.
- During startup, if the sticks are not centered, a safety lockout function is activated and the motors will not start. The safety lockout function is deactivated once the sticks are centered.
- If the motors do not start, refer to Chapter 9 “Troubleshooting.”

6.1.2. Verify Correct Magnetic Orientation

- Whenever changing takeoff location, before the first flight, verify that the aircraft is able to correctly orient itself relative to Earth's magnetic field since some locations may have a magnetic anomaly.

  Magnetic Orientation Check Procedure

  - Remove the propellers from the aircraft.
  - Power on the aircraft and controller.
  - Verify connection between the aircraft and controller.
  - Establish a connection between the aircraft and the ACSL TAKEOFF ground control application.
  - While keeping the aircraft level, lift the aircraft and rotate it back and forth 180-degrees around the yaw axis, taking about 1 to 2 seconds for each 180-degree rotation.
  - Verify that the "**Compass divergence**" message is not displayed on the ACSL TAKEOFF ground control application.
  - If the "Compass divergence" message is displayed, it is recommended to perform a magnetic calibration.

  *Refer to the ACSL TAKEOFF ground control application User Manual for instructions on performing a magnetic calibration.



If the "Compass divergence" caution message is displayed, the ability to take off in either the position (POS) or auto (AUT) mode is inhibited.
Follow the instructions below.

- If any equipment that emits a strong magnetic field is installed, buried, or suspected in the vicinity, change the takeoff location.
- Perform a magnetic calibration when the aircraft configuration is changed, such as adding optional equipment or removing a standard camera.

6.1.3. Magnetic Calibration During Flight

During planned flight (auto (AUT) mode):

- If magnetic interference is detected, a "Compass divergence" caution or warning message will be displayed. The aircraft will automatically rotate 360° in place to perform magnetic calibration.
- The rotation speed can be adjusted in the ACSL TAKEOFF ground control application under Limit (GPS) > Maximum autonomous yaw rate.
- After calibration is complete, the aircraft will hover in place for 30 seconds before automatically resuming the planned flight. To resume immediately, press the "Resume" button during the waiting period.

During flight in position (POS) or manual (MAN) mode:

- If magnetic interference is detected, a "Compass divergence" caution or warning message will be displayed, followed by a "Do a 360 rotation" caution message.
- Follow the on-screen prompt and use the controller's stick controls to rotate the aircraft 360° in place. When the "Calibration Complete" notification is displayed, the calibration is finished.







After landing from any flight in which magnetic calibration was performed, stop the motors. This resets the calibration values to their pre-flight state.
Magnetic calibration during flight is an auxiliary function. If calibration was performed in an area with magnetic anomalies, the stored values could affect subsequent flights. Always stop the motors after landing to clear them.

6.1.4. Confirm Level of Charge

- Before flight, check the level of charge of the battery that will be inserted into the aircraft.

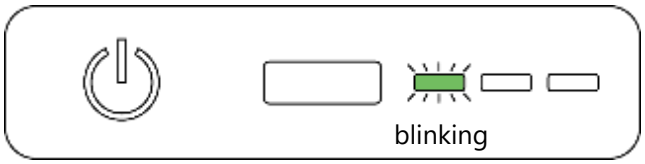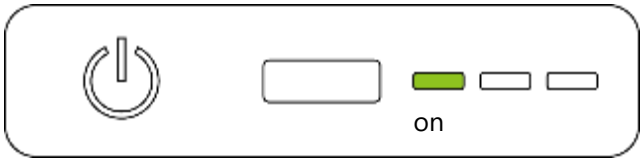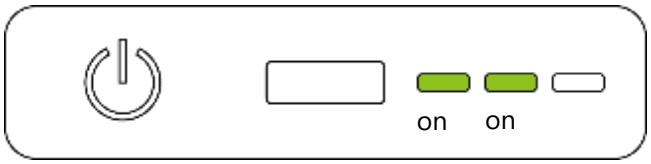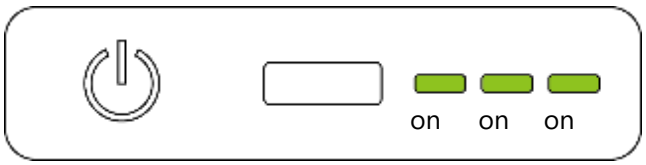

LED indication of remaining battery charge during normal charging	
Battery level LED	**Battery level**
	0-24%
	25-49%
	50-74%
	75-100%

CAUTION

The ability to take off (i.e. the ability to increase motor speed above idle) is inhibited when the aircraft's battery level is 13% or lower. See below for dealing with low battery.

- Continually monitor the battery level of the aircraft during flight.

Battery level	Message	Resulting actions
24%	Battery level low (caution)	Battery power is low. Continue to monitor the battery level.
13%.	Battery level low (warning)	The ability to take off is inhibited. Land in a safe place as soon as possible. If in auto (AUT) mode, the aircraft will enter emergency mode.
6%	Battery level low (warning)	An emergency landing will commence.



- If the aircraft's battery level falls to 6% or lower, the battery level LED will blink and the aircraft will make an emergency landing straight down to prevent a crash. Continually monitor the battery level during flight and land the aircraft in a safe location before the battery level falls to 6%.


6.1.5. Check the Status LED

CAUTION

If any abnormality is found during the inspection, do not fly the aircraft. Contact your dealer.

➔ With the battery installed in the aircraft, when the power button is pressed the status LED will display the flight mode set on the controller. The status LED will also flash red when a GPS or visual odometry abnormality is detected, and white when an aircraft abnormality is detected.

➔ Refer to Section 6.2.1: Flight Mode Settings.

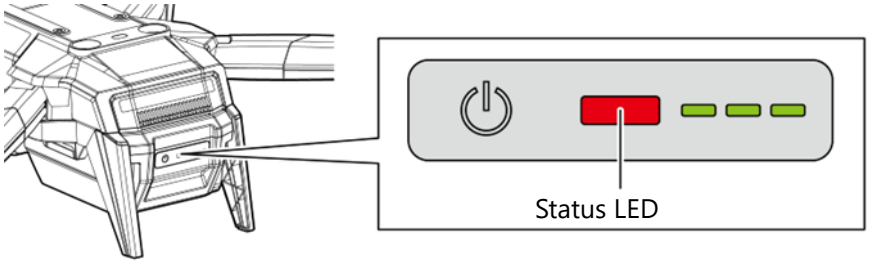

Status LED indication when the aircraft is powered on			
Flight mode	Mode indication	GPS and visual odometry abnormality	Aircraft abnormality
Manual mode Switch position: MAN	Flashing yellow	Flashing red	Flashing white
Position mode Switch position: POS	Flashing green		
Auto mode Switch position: AUT	Flashing blue		
All modes Switch position: Any (Auto takeoff and landing)	Flashing purple		

WARNING

- If, while in flight, the status LED flashes red, immediately switch to manual (MAN) mode.
- Continued flight in position (POS) or auto (AUT) mode with the status LED flashing red may result in loss of control and a crash.

ADVISORY

The ability to take off (i.e. the ability to increase motor speed above idle) is inhibited in position (POS) or auto (AUT) mode while the status LED is flashing red.


6.1.6. Install Propellers

Install the propellers.

➔ Refer to Section 3.7: “Propeller Installation” for instructions on how install the propellers.

6.2. Basic In-Flight Operations

6.2.1. Flight Mode Settings

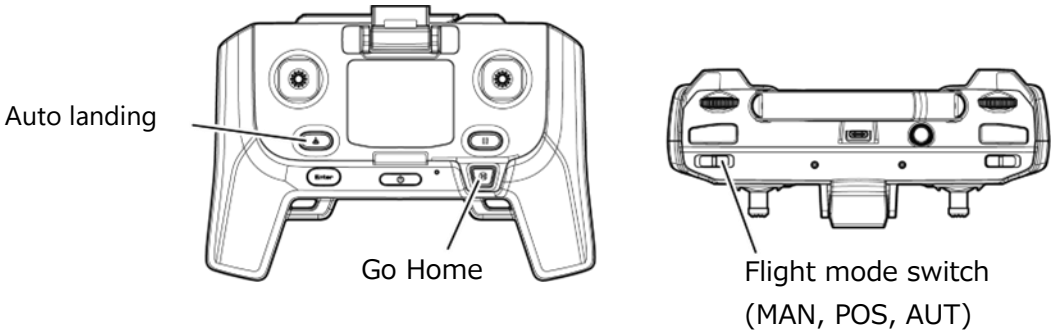

Flight mode	Feature
Manual mode Switch position: MAN	This mode does not use GPS. The aircraft will achieve a flat attitude when the sticks are released, but a hover at a fixed position will not be achieved.
Position mode Switch position: POS	This mode uses GPS or visual odometry to control the position and speed of the aircraft. The aircraft will achieve a hover at a fixed position when the sticks are released.
Auto mode Switch position: AUT	This mode uses GPS to autonomously execute a flight along a route that was pre-planned using the ACSL TAKEOFF ground control application. This mode cannot be used in a non-GPS environment.
Automatic landing mode Switch position: MAN, POS, AUT	This mode uses GPS or visual odometry to autonomously land at the current location. This mode is entered by pressing either the land button on the ACSL TAKEOFF ground control application or the auto-landing button on the controller.
Go Home mode Switch position: MAN, POS, AUT	This mode uses GPS to autonomously return to the takeoff location. This mode is entered by pressing either the Go Home button in the ACSL TAKEOFF ground control application or the Go Home button on the controller.
Command flight Switch position: AUT	This mode uses GPS to control the location and orientation of the aircraft using the ACSL TAKEOFF ground control application.
Auto-takeoff Switch position: AUT	This mode uses GPS or visual odometry to autonomously take off. This mode is entered by pressing the takeoff button on the ACSL TAKEOFF ground control application.

Idling	The aircraft has transitioned from the powered-on state to the flight-ready state and the motors are rotating at the minimum rotational speed.

CAUTION

Flying in manual (MAN) mode requires advanced piloting skill.
Position (POS) and auto (AUT) modes primarily use GPS for position control, but automatically switch to visual odometry when reception of GPS signals is poor or not possible.
* The ability to take off (i.e. the ability to increase motor speed above idle) is inhibited in auto (AUT) mode while GPS reception is poor (as indicated by the status LED flashing red or a red GPS icon in the ACSL TAKEOFF Ground Control Application).

6.2.2. Basic Manual Mode (MAN) Operations


- This section describes basic operations in manual (MAN) mode. This mode requires active use of the controller and is primarily intended to give the pilot full control in case of an operational abnormality or emergency.
  ➔ Refer to Chapter 7: Abnormal Operating Procedures.
- Manual (MAN) mode should be used when GPS or visual-odometry cannot correctly measure the aircraft's position or speed.
- Assists the pilot in maintaining a constant aircraft attitude and altitude or vertical speed.

WARNING

Failure to comply with the following may result in an unexpected collision or crash that could cause injury, fire, or damage.
- There is a risk of lacerations or other injury from contact with the rotating propellers. Always keep a sufficient distance.
- The aircraft will not maintain its position in manual (MAN) mode. The pilot must make continuous corrective inputs to maintain the aircraft's position in manual (MAN) mode. Always exercise care after switching to manual (MAN) mode.
- When switching to manual (MAN) mode, be sure to confirm the forward heading (yaw angle) of the aircraft before manipulating the controls. It is recommended to turn the aircraft so that it faces away from the pilot for intuitive maneuvering.
- If the aircraft's battery level falls to 6% or less, the battery level LED will flash and the aircraft will make an emergency landing straight down to prevent a crash. Continually monitor the battery level during flight and land the aircraft in a safe location before the battery level falls to 6%.
  ➔ Refer to 7.1.9 Low-Battery Emergency Landing

Switching to manual mode

- If the aircraft is not able to measure its position or speed with GPS or visual-odometry, switch to manual mode by setting the controller's flight mode switch to the "MAN" position.
- Verify that the aircraft's status LED is blinking yellow.

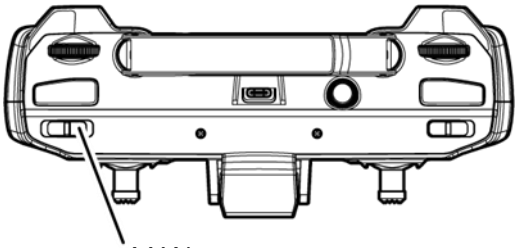

Controller flight mode switch	TAKEOFF display	Aircraft status LED
MAN	Manual	Blinking yellow

Maneuvering the aircraft using the controller

- Takeoff
  - After starting the motors, slowly manipulate the throttle stick upward from the center position to take off.
- Hovering
  - The pilot has direct control of aircraft attitude. The aircraft will not hold its position.
  - The position of the aircraft should be controller by manipulating the roll and pitch sticks.
  - Manipulate the yaw stick to change the heading direction of the aircraft.
- Altitude
  - The aircraft will maintain a constant altitude when the throttle stick is in the center position.
- Moving forward, backward, left, and right
  - Manipulate the roll and pitch sticks to adjust the path and speed of the aircraft.
- Landing
  - Manipulate the throttle stick downward to descend the aircraft toward the ground.
  - When nearing the ground, ease the throttle stick toward the center to reduce the rate of descent.
  - Upon landing, hold the throttle stick in the lowest position until the aircraft is securely grounded.

②



There is a risk of flyaway or loss of control when flying in winds that are higher than the specified wind speed limit.

➔ Refer to 1.2.3. Limitations. Abort flight immediately if the wind speed exceeds the limit.



- If, during takeoff or landing, any part of the landing gear or the aircraft inadvertently contacts the ground or any other object, do not attempt to climb. Immediately hold the throttle stick in the lowest position and land the aircraft.
- Attempting to climb or hover while in contact with the ground or other object may result in excessive attitude angles and a possible crash.
- Excessive use of pitch or roll in manual (MAN) mode may cause the aircraft to exceed its maximum speed and lose control. Fly at or below the maximum speed.

➔ Refer to 1.2.3. Limitations.



- Takeoffs and landings should be performed on a flat, level surface.
- During takeoff, any stick input other than throttle may cause the aircraft to tip over.
- The aircraft will not maintain its position in manual (MAN) mode. The pilot must make continuous corrective inputs to maintain the aircraft's position in manual (MAN) mode.
- Wind gusts may cause the aircraft to move suddenly.
- When landing, do not land with any horizontal speed. Attempting to land with horizontal speed may cause the aircraft to tip over or the propellers to contact the ground.
- The soft-landing assist function does not work in manual mode. Depending on the condition of the landing area, landing with high vertical speed may cause damage. Operate the throttle stick carefully and land slowly.

6.2.3. Basic Position Mode (POS) Operations

- This section describes basic operations in a position (POS) mode. This is the mode that should normally be used when it is desired to control the location of the aircraft via the control sticks.
- GPS or visual-odometry are used to measure the aircraft's position and speed.
- Assists the pilot in maintaining a constant aircraft position or speed.
- Idling cannot be initiated if the GPS signal quality is low, if the unit is operated near buildings or metal structures where communication conditions are poor, or if magnetic interference is detected.

WARNING

Failure to comply with the following may result in an unexpected collision or crash that could cause injury, fire, or damage.


- There is a risk of lacerations or other serious injury from contact with the rotating propellers. Always keep a sufficient distance.
- In position (POS) mode, the aircraft relies primarily on GPS signals (when available) for position control. Switch to manual (MAN) mode immediately if the GPS icon in the ACSL TAKEOFF ground control application turns red, if the aircraft's status LED flashes red, or if the aircraft drifts or otherwise moves in a way that seems abnormal.
- When reception of GPS signals is poor or not possible, the aircraft will switch automatically to visual odometry for position control. Switch to manual (MAN) mode immediately if the "Vision accuracy low" caution message is displayed in the ACSL TAKEOFF ground control application, if the aircraft's status LED flashes red, or if the aircraft drifts or otherwise moves in a way that seems abnormal.
- If the aircraft's battery level falls to 6% or less, the battery level LED will flash and the aircraft will make an emergency landing straight down to prevent a crash. Continually monitor the battery level during flight and land the aircraft in a safe location before the battery level falls to 6%.

➔ Refer to 7.1.9_Low-Battery Emergency Landing

①

Switching to position mode

- Switch to position mode by setting the controller's flight mode switch to the "POS" position.
- Verify that the aircraft's status LED is blinking green.
- Verify that the aircraft's status LED is not blinking red.
- Ensure that the takeoff area is not within a user-defined geofence no-fly zone.

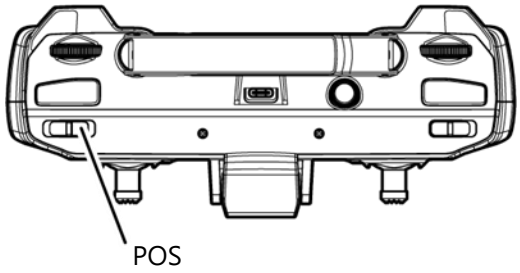

Controller flight mode switch	TAKEOFF display	Aircraft status LED
POS	Position	Blinking green

ADVISORY

- The ability to take off (i.e. the ability to increase motor speed above idle) is inhibited in position (POS) mode while the status LED is flashing red.

- The ability to start the motors is inhibited if the aircraft detects that it is within a no-fly zone set by the user with the ACSL TAKEOFF ground control application.

Maneuvering using the controller

- Takeoff
  - After starting the motors, slowly raise the throttle stick upward from the center position and take off.
- Hovering
  - The pilot has direct control of the aircraft's position.
  - The position of the aircraft can be adjusted by manipulating the roll and pitch sticks.
  - Manipulate the yaw stick to change the heading direction of the aircraft.
- Altitude
  - The aircraft will maintain a constant altitude when the throttle stick is in the center position.
- Forward/backward/left/right sideways
  - Manipulate the roll and pitch sticks to adjust the speed and trajectory of the aircraft.
- Landing
  - Manipulate the throttle stick downward to descend the aircraft toward the ground.
  - When nearing the ground, the soft-landing assist function will automatically adjust the rate of descent.
  - Upon landing, hold the throttle stick in the lowest position until the aircraft is securely grounded.



There is a risk of flyaway or loss of control when flying in winds that are faster than the specified wind speed limit.

➔ Refer to 1.2.3. Limitations. Abort flight immediately if the wind speed exceeds the limit.



- If, during takeoff or landing, any part of the landing gear or the aircraft inadvertently contacts the ground or any other object, do not attempt to climb. Immediately hold the throttle stick in the lowest position and land the aircraft.
- Attempting to climb or hover while in contact with the ground or other object may result in excessive attitude angles and a possible crash.
- Malfunction of the soft-landing assist function may result in an excessively slow descent. Switch to manual (MAN) mode to regain control of the descent speed.
- If the "Enhanced Takeoff Safety Check" setting is enabled, takeoff will not be permitted under the following conditions: indoor flights in Position Mode relying solely on Visual Odometry, or environments where GPS signal integrity, multipath interference, or magnetic interference do not meet the safety requirements for takeoff.
- If you intend to take off in Position Mode under such conditions, please ensure that you fully understand the risks of disabling this function before doing so. When operating with this function disabled, exercise the utmost caution and give due consideration to flight safety.
- In position (POS) mode, with good reception of GPS signals, the maximum possible ground speed is 15 m/s (33.5 MPH). If reception of GPS signals is poor or not possible, the aircraft will automatically

switch to visual odometry for position control and ground speed will be limited to 2 m/s (4.5 MPH) and vertical speed will be 1 m/s (2.2 MPH).
- The collision avoidance feature only functions in the forward and upward directions. Avoid flying at low altitude to prevent collision with rising terrain.

ADVISORY

- Takeoffs and landings should be performed on a flat, level surface.
- During takeoff, any stick operation other than throttle may cause the aircraft to tip over.
- As the aircraft approaches the ground for landing, it will automatically decelerate to assist in a soft landing based on the distance measurements from the infrared sensor on the bottom of the aircraft. *Depending on the composition and condition of the ground directly below the aircraft, this feature may not function properly. The pilot should monitor the landing and be ready to manually adjust the rate of descent if it appears not to be slowing near the ground.
- When landing, do not land with any horizontal speed. Attempting to land with horizontal speed may cause the aircraft to tip over or the propellers to contact the ground.

6.2.4. Basic Auto Mode (AUT) Operations

- This section describes basic operations in the auto (AUT) mode. This is the mode that should normally be used when it is desired to control the location of the aircraft via the ACSL TAKEOFF ground control application.
- GPS or visual-odometry are used to measure the aircraft's position and speed.
- Assists the pilot in maintaining a constant aircraft position or speed.
- If the GPS signal integrity is low, or if the aircraft is in environments with poor communication conditions such as near buildings or metallic structures, or when magnetic interference is detected, the system will not allow idling to start.

WARNING


Failure to comply with the following may result in an unexpected collision or crash that could cause injury, fire, or damage.
- There is a risk of lacerations or serious injury from contact with the rotating propellers. Always keep a sufficient distance.
- In auto (AUT) mode, the aircraft relies primarily on GPS signals (when available) for position control. Switch to manual (MAN) mode immediately if the GPS icon in the ACSL TAKEOFF ground control application turns red, if the aircraft's status LED flashes red, or if the aircraft drifts or otherwise moves in a way that seems abnormal.

①
- If the aircraft's battery level falls to 6% or less, the battery level LED will flash and the aircraft will make an emergency landing straight down to prevent a crash. The emergency landing cannot be cancelled by the user, and all controls will be locked out. Continually monitor the battery level during flight and land the aircraft in a safe location before the battery level falls to 6%.

Switching to auto mode

- Switch to auto mode by setting the controller's flight mode switch to the "AUT" position.
- Verify that the status LED on the aircraft is blinking blue.
- Verify that the status LED on the aircraft is not blinking red.

- Ensure that the takeoff area is not within a user-defined geofence no-fly zone.

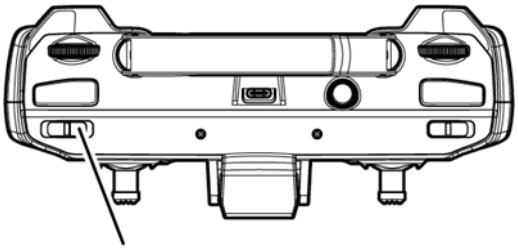


Controller flight mode switch	TAKEOFF display	Status LEDs on the aircraft
AUT	Auto	Blinking blue

ADVISORY

- The ability to take off (i.e. the ability to increase motor speed above idle) is inhibited in auto (AUT) mode while the status LED is flashing red.
- The ability to start the motors is inhibited if the aircraft detects that it is within a no-fly zone set by the user with the ACSL TAKEOFF ground control application.

Preflight checklist

②
- When the controller's flight mode switch is set to the "AUT" position, a red checklist button will appear in the ACSL TAKEOFF ground control application.
  *For details on the checklist, please refer to the ACSL TAKEOFF ground control application user manual.
- Press the checklist button to display the preflight checklist.
- The preflight checklist automatically checks for GPS and sensor health.
- When all checks, including manual check items, are completed, the checklist button turns blue and the arm button appears.

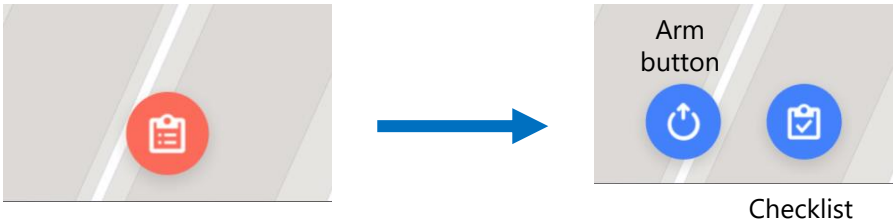

③ Checklist button

④ Checklist button (completed)

Free flight

➔ Refer to section 6.3.6: Directional Pad (D-Pad).

Planned flight

➔ Refer to Section 6.3.12: Planned Flight.

6.3. In-Flight Functions

6.3.1. Availability of Functions for each Flight Mode

Functions that may be executed from the controller

Function	Manual (MAN)	Position (POS)	Auto (AUT)
Auto landing	✓	✓	✓
Pause	From Go Home or auto landing modes		✓
Go Home	✓	✓	✓
Collision avoidance	-	✓	✓
Camera/gimbal operations	✓	✓	✓
Forced stop	✓	✓	✓


Functions that may be executed from the ACSL TAKEOFF ground control application

Function	Manual (MAN)	Position (POS)	Auto (AUT)
Auto takeoff	-	-	✓
Auto landing	✓	✓	✓
Pause	From Go Home or auto landing modes		✓
Directional pad (D-pad)	-	-	✓
Go Home	✓	✓	✓
Go to Transmitter	✓	✓	✓
Camera/gimbal operations	✓	✓	✓
Planned flight	-	-	✓
User-defined geofence	-	✓	✓
Altitude limitations	-	✓	✓
Marker tracking	-	-	✓
Emergency landing	✓	✓	✓

Forced stop	✓	✓	✓

6.3.2. Modal Dialog (TAKEOFF Ground Control Application)

- In the case of the ACSL TAKEOFF ground control application, the following functions are executed only after confirmation via a modal dialog window. The intention to execute the function is confirmed by sliding the confirmation slider to the right, and can be canceled by pressing the close button.
  - Auto takeoff
  - Auto landing
  - Go to Transmitter
  - Emergency landing
  - Forced stop

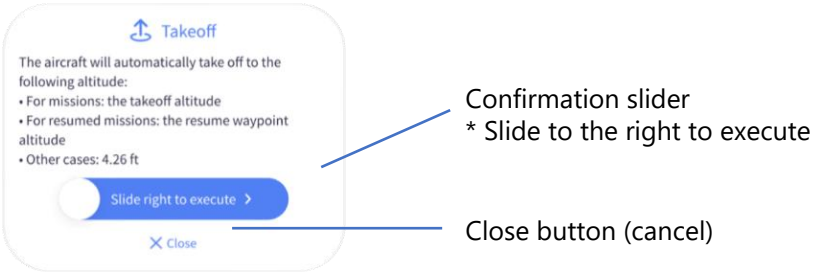

6.3.3. Auto Takeoff

- Allow the controller sticks to remain in the center position.
- Set the controller mode switch to auto (AUT) mode and tap the takeoff button on the ACSL TAKEOFF ground control application to execute an automatic take off on the spot.
- After takeoff, the aircraft will hover at approximately 3 meters (10 feet).





ADVISORY

- Complete the checklist before starting the motors.
  ➔ Refer to Section 6.2.4: Basic Auto Mode (AUT) Operations for details.
- Take off from a flat, level surface.

6.3.4. Auto Landing

- Press and hold the Auto Landing button on the controller or tap the Land button from the Command Menu in the ACSL TAKEOFF ground control application to execute an automatic landing on the spot.

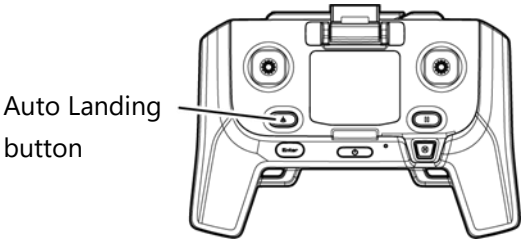

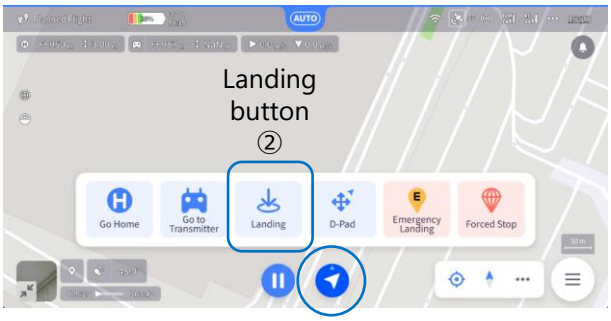



ADVISORY


Land on a flat, level surface.

6.3.5. Pause/Resume

- Press and hold the Pause button on the controller or tap the Pause button on the ACSL TAKEOFF ground control application to pause the function currently being executed.
- In manual (MAN) mode and position (POS) mode, it is only possible to initiate a pause while executing a Go Home, Go to Transmitter, or auto landing.
- In auto (AUT) mode, pause can be initiated while executing an auto takeoff, planned flight, Go Home, Go to Transmitter, or auto landing.
- Releasing the pause button on the controller or pressing the resume button on the TAKEOFF ground control application will cause the paused function to resume.

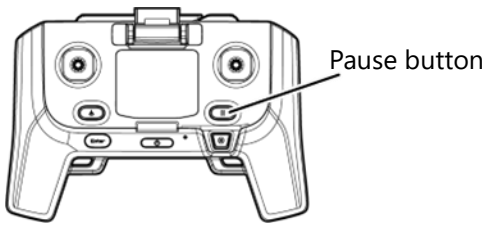


Pause button


Resume button

6.3.6. Directional Pad (D-Pad)

- Directional Pad (D-Pad) control can be initiated in the ACSL TAKEOFF ground control application, by tapping the D-Pad button from either the command menu or the emergency menu (in some situations, see Section 7.1.4 Emergency Menu on pg. 142). D-pad control is automatically initiated while in auto (AUT) mode, if no flight plan has been uploaded to the aircraft, or when the flight plan is complete.
- The D-Pad allows the pilot to manually control the aircraft from within the ACSL TAKEOFF ground control application.
  Note that pressing and holding the D-Pad button will not result in continuous movement of the aircraft.



Command Button

Left Directional Pad		Right Directional Pad	
Forward	Distance: 2 m (6.5 ft) per press Speed: 1 m/s (2 mph)	Up	Distance: 2 m (6.5 ft) per press Speed: 1 m/s (2 mph)
Back	Distance: 2 m (6.5 ft) per press Speed: 1 m/s (2 mph)	Down	Distance: 2 m (6.5 ft) per press Speed: 0.5 m/s (1 mph)
Right (slide)	Distance: 2 m (6.5 ft) per press Speed: 1 m/s (2 mph)	Right (turn)	30° per press
Left (slide)	Distance: 2 m (6.5 ft) per press Speed: 1 m/s (2 mph)	Left (turn)	30° per press

WARNING

There is a risk of flyaway or loss of control when flying in winds that are faster than the specified wind speed limit.

➔ Refer to 1.2.3. Limitations. Abort flight immediately if the wind speed exceeds the limit. Abort flight immediately if the wind speed exceeds the limit.

CAUTION

If you cannot decrease the altitude of the aircraft or if the descent speed is low due to collision avoidance feature, switch to manual (MAN) mode.


6.3.7. Go Home

- Press and hold the Go Home button on the controller or tap the Go Home button from the Command Menu in the ACSL TAKEOFF ground control application to execute the Go Home function. Upon execution, if the aircraft is at an altitude that is lower than 10 m (33 ft) above the takeoff location, then it will immediately climb to that altitude. The aircraft will then return to the takeoff location, maintaining its altitude, and then will initiate an automatic landing.




Go Home button

Go Home button

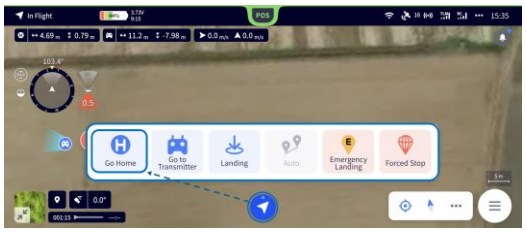

Command Menu button

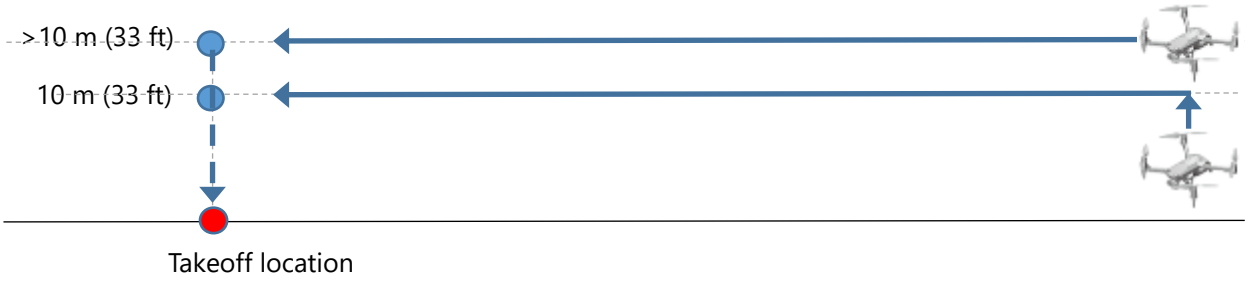

CAUTION

- Switch to manual (MAN) mode immediately if the GPS icon in the ACSL TAKEOFF ground control application turns red, if the aircraft's status LED flashes red, or if the aircraft drifts or otherwise moves in a way that seems abnormal.
- If Go Home is set to follow the reverse route in TAKEOFF 2.0.4 or later, the aircraft will ascend to the Go Home altitude after reaching Waypoint 1. It will then travel horizontally while maintaining that altitude to the takeoff point, and finally perform an automatic landing.


Please be aware of altitude changes during flight.

TAKEOFF 1.17.5 or earlier

① Proceed to Waypoint 1 (takeoff point) by following the route in reverse order.
② Switch to Go Home mode; however, the system will immediately transition to auto-landing mode at the position.

TAKEOFF 2.0.4 or later

① Proceed to the Waypoint by following the route in reverse order.
② Initiate Go Home; ascend vertically to the preset Go Home altitude at the current position.
③ Move horizontally to the Home point.
④ Perform automatic landing.

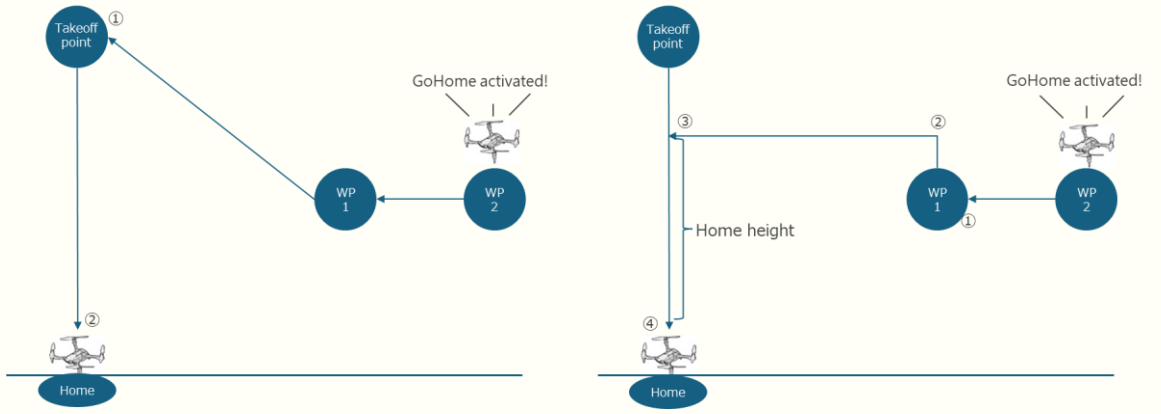


ADVISORY


In Go Home mode:


- The aircraft will proceed to the home location in a straight line from its current location. Please confirm in advance whether there are any obstacles in the way. If necessary, increase the aircraft's altitude prior to engaging Go Home mode.
  Note: By default, the return path is set to a straight line.
  Note: If there is a geofence along the route, the aircraft will return via the shortest automatically generated path that avoids the geofence.
- The pilot can regain control of the aircraft at any time by switching the flight mode on the controller.
- The motion of the aircraft can be paused and resumed using the pause button on the controller.
- Commands may be issued from the command menu in the ACSL TAKEOFF ground control application. For details, check the ACSL TAKEOFF ground control application User Manual.
- If the ACSL TAKEOFF ground control application displays the "HOME position unknown" warning message, Go Home will not be executed. In auto mode, it will hover on the spot.

6.3.8. Go to Transmitter

- Press and hold the Go to Transmitter button on the controller or tap the Go to Transmitter button from the Command Menu in the ACSL TAKEOFF ground control application to execute the Go to Transmitter function. The aircraft will maintain its altitude and proceed directly to the nearest location that is approximately 15 m (49 ft) from the controller, and then initiate a hover.
- If the controller's location changes during the return, the aircraft will recompute the target location (the nearest location that is 15 m (49 ft) from the controller).
- Control will transition to Directional Pad (D-Pad) approximately 2 seconds after initiating the hover.

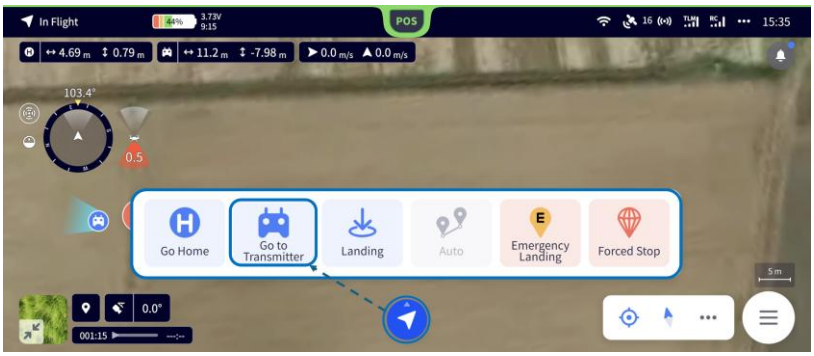

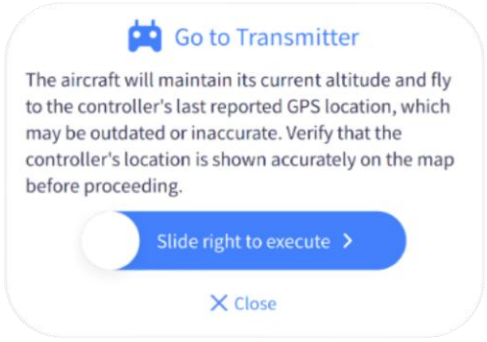

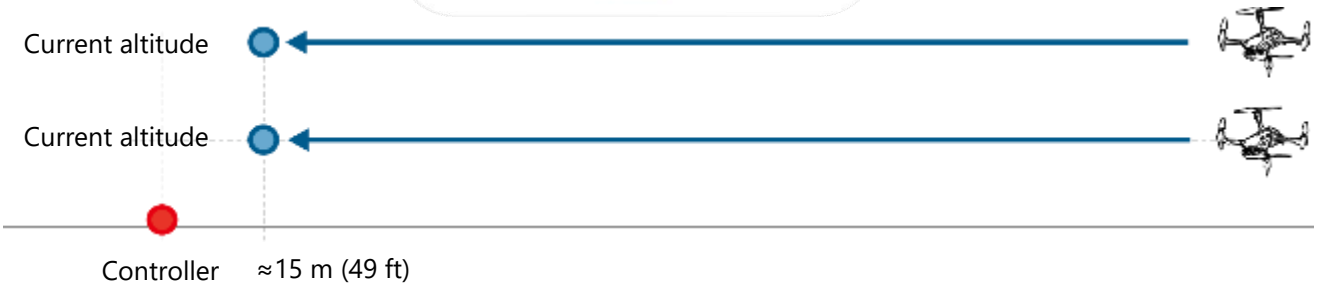

CAUTION

- In Go to Transmitter mode, the aircraft will proceed in a straight line to a location approximately 15 m (49 ft) from the controller's location and initiate a hover. Be careful not to move to a location directly under the aircraft.
- Switch to manual (MAN) mode immediately if the GPS icon in the ACSL TAKEOFF ground control application turns red, if the aircraft's status LED flashes red, or if the aircraft drifts or otherwise moves in a way that seems abnormal.
- The controller location is based on the location of the smartphone or other device connected to the controller, etc. Do not use the "Return to controller" function if the location of the controller icon displayed on TAKEOFF or the distance between the aircraft and the controller is not accurate.


ADVISORY


In Go to Transmitter mode:

- The aircraft will proceed to the controller location in a straight line from its current location. Please confirm in advance whether there are any obstacles in the way. If necessary, increase the aircraft's altitude prior to engaging Go to Transmitter mode.
- The pilot can regain control of the aircraft at any time by switching the flight mode on the controller.
- The motion of the aircraft can be paused and resumed using the pause button on the controller.
- Commands may be issued from the command menu in the ACSL TAKEOFF ground control application. For details, check the ACSL TAKEOFF ground control application User Manual.

6.3.9. Obstacle Avoidance

- When the controller's Collision Avoidance switch is set to the ON position, the aircraft will climb to avoid obstacles that are detected while executing Go Home or Go to Transmitter functions.
- As the aircraft climb to avoid an obstacle, once it is detected that the obstacle has been cleared, the aircraft will continue to climb an additional 2 m (6.5 ft) before resuming the return, maintaining the new altitude.

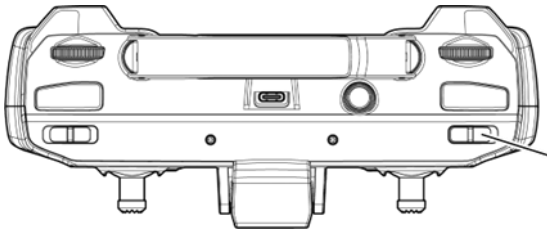

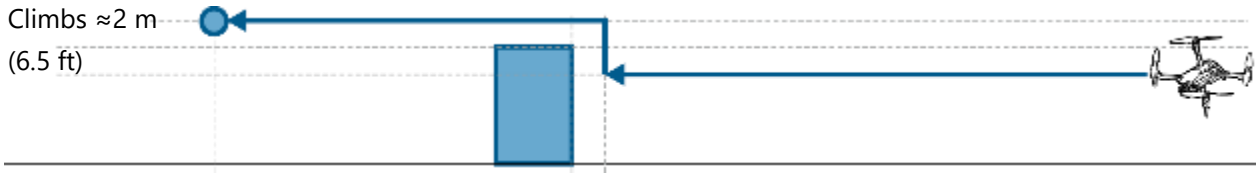


CAUTION

The obstacle avoidance function can help but the pilot is ultimately responsible for obstacle avoidance. Keep a close eye on the aircraft and switch to manual (MAN) mode in an emergency.

6.3.10. Collision Avoidance

- After takeoff, setting the controller's Collision Avoidance switch to the ON position activates the collision avoidance function to avoid collisions with obstacles ahead of, above and below the aircraft. (The distance to the detected obstacle is displayed on the controller and the ACSL TAKEOFF ground control application.)
- When an obstacle is detected to be closer than the collision avoidance distance, the aircraft will no longer proceed in the direction of the detected obstacle.
- There is no function to maintain a constant collision avoidance distance when progress in the direction of an obstacle is stopped (i.e. the aircraft will not back away from obstacles).

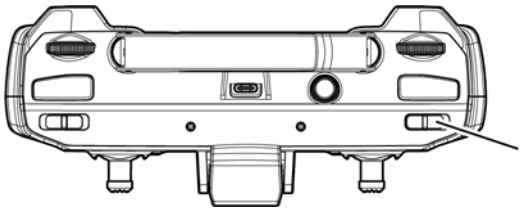



Example controller display



Display Example on ACSL TAKEOFF ground control application

Collision avoidance direction	Collision avoidance distance	Sensor(s)	Mode
Forward	Approx. 2m (6.5 ft)	Stereo camera	POS/AUT mode only
Top	Approx. 1m (3 ft)	Infrared sensor and/or Stereo camera	POS/AUT mode only
Bottom	Approx. 1m (3 ft)	Infrared sensor and/or Stereo camera	AUT mode only (Disabled during auto-landing)

CAUTION

- The collision avoidance function can help but the pilot is ultimately responsible for collision avoidance.
- Obstacles may not properly be detected depending on environmental factors such as lighting and visibility and the shape and color of the obstacles. Always fly with sufficient distance from obstacles.

ADVISORY

- The collision avoidance function does not work in manual (MAN) mode.
- The collision avoidance function is always disabled when the collision avoidance switch on the controller is turned off. If collision avoidance is desired during a planned flight in auto (AUT) mode, the collision avoidance switch on the controller must be turned on.
- When the collision avoidance switch is turned on, the controller will display the symbol “Example controller display” shown above.
- This function works when the collision avoidance switch is ON and a check mark is placed in the Collision Avoidance Sensor check box in the “Options” section of the settings screen of the ACSL TAKEOFF ground control application.

6.3.11. Camera/Gimbal Operation


- Camera operation is performed using the right and left Camera Control button and wheels, or the camera control buttons and sliders on the ACSL TAKEOFF ground control application.
  *For details on camera/gimbal operation with the ACSL TAKEOFF ground control application, refer to the ACSL TAKEOFF ground control application user manual.

ADVISORY

- Upon startup, the gimbal performs a self-calibration. If the gimbal touches the ground or any other object during this process, the calibration will fail and the gimbal will cease to operate. Always place the aircraft on a flat, level surface before starting up.
- The aircraft will not maintain its position in manual (MAN) mode. The pilot must make continuous corrective inputs to maintain the aircraft's position in manual (MAN) mode, even while manipulating the gimbal.
- Video recording and interval shooting can only be stopped by the controller if started by the controller, or by the ACSL TAKEOFF ground control application if started by the ACSL TAKEOFF ground control application.

Camera/gimbal operation via the controller


①
- Push and hold the right camera control button to start/stop a video recording.
- Briefly push the right camera control button to starts/stop interval still image capture.
- Briefly push the left gimbal control button to point the gimbal forward. Push and hold to turn the gimbal downward.
- The left gimbal control wheel is used to control the gimbal tilt (up and down).
- The right gimbal control wheel is used to control the gimbal pan (left and right).

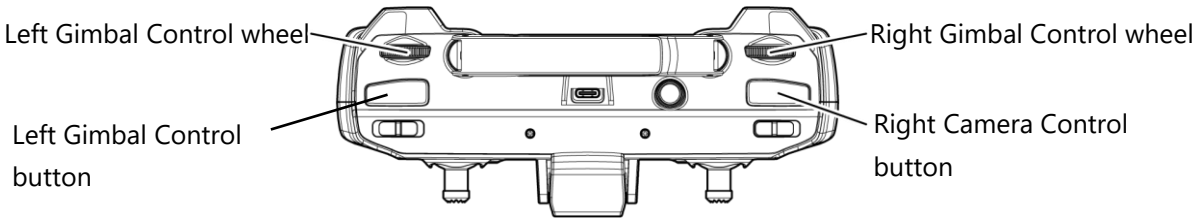


②

Camera/gimbal operation via the ACSL TAKEOFF ground control application


- If the map is displayed full screen, tap the Mini Camera Display at the bottom-left of the screen to switch to the camera full screen view.

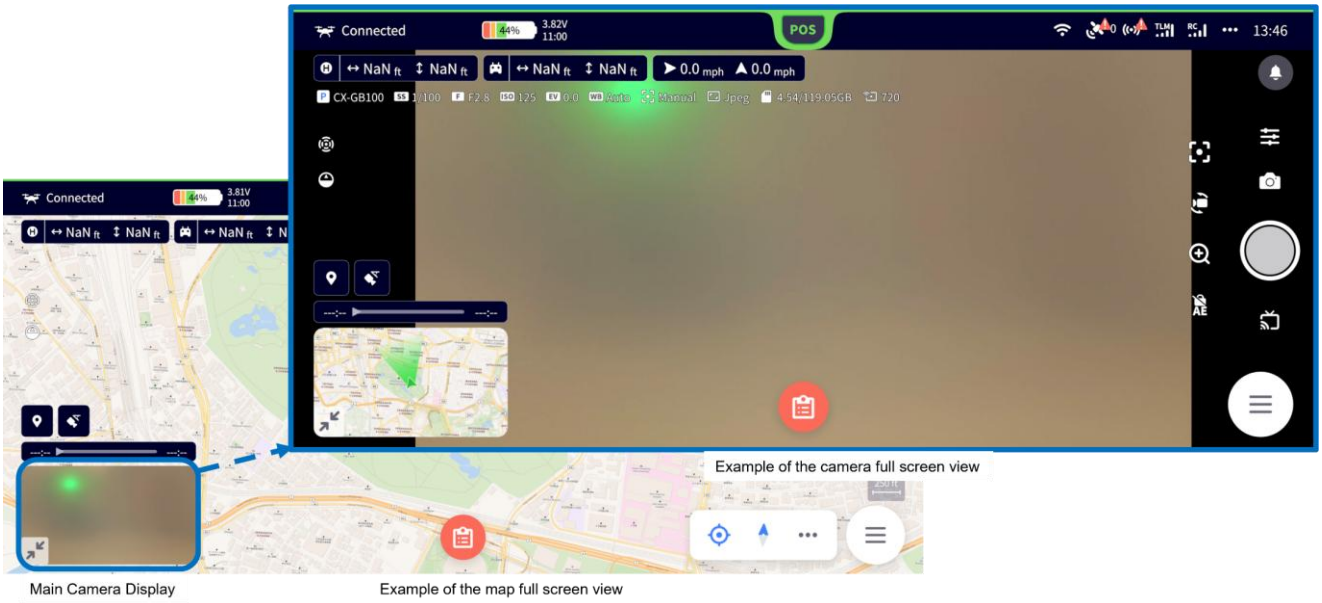

- The camera control buttons at the right side of the camera full screen view are used to perform the following functions.
  - Selecting the camera mode: still image, video and interval still image.
  - The shutter button is used to start and stop shooting.
  - The video stream recording button is used to start and stop the recording of the video stream to the mobile device.
  - The camera settings button opens the camera settings menu for advanced camera settings.

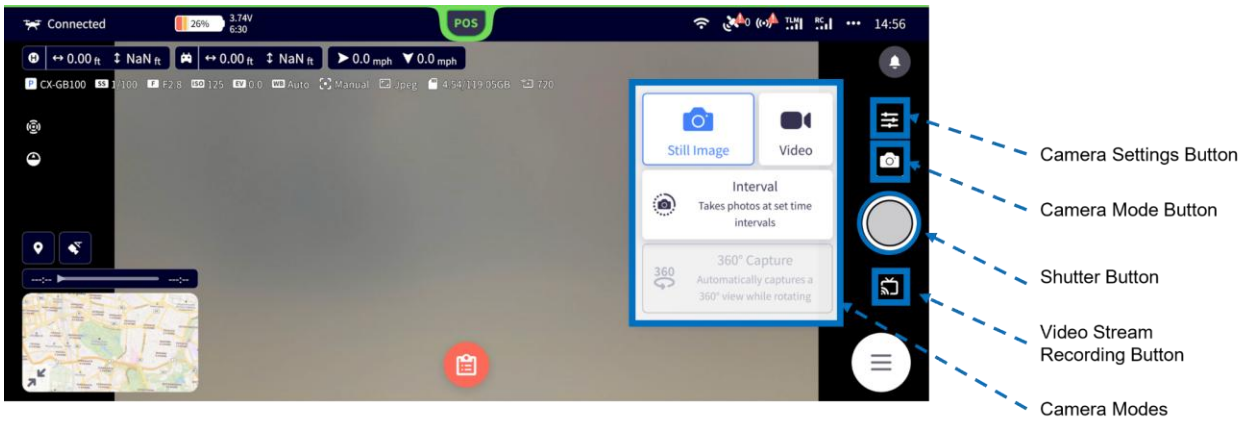


- The camera control buttons at the right of the camera full screen view are used to perform the following functions.
  - Display the camera manual focus slider.
  - Display the gimbal tilt slider.
  - Display the camera zoom slider.
  - Locks/unlock the exposure (auto exposure lock).

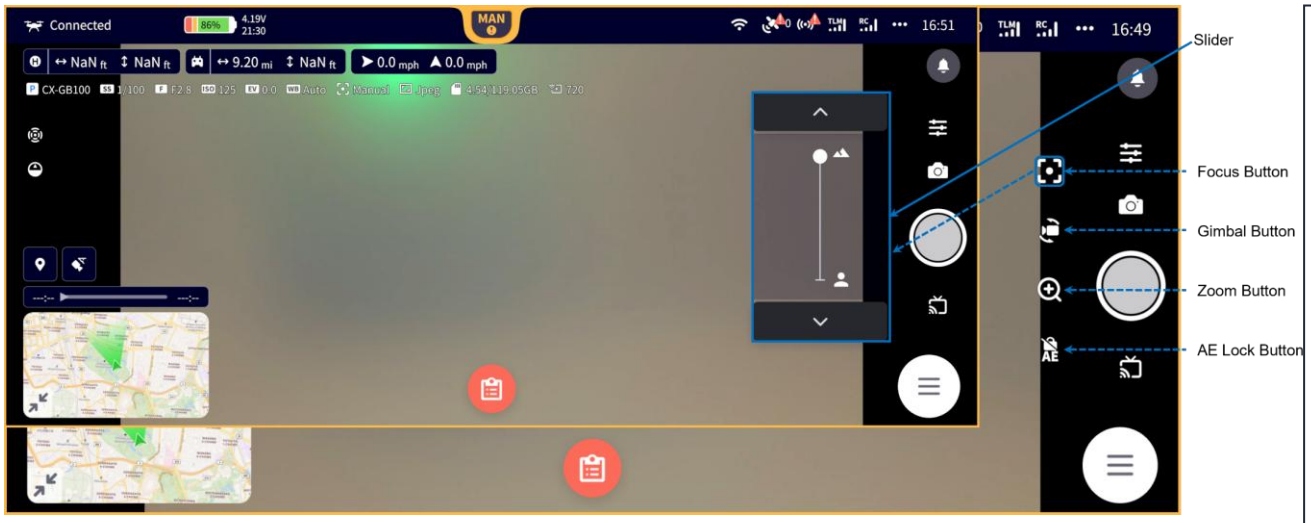

6.3.12. Planned Flight

- To use the planned flight function, a flight plan must first be created then uploaded to the aircraft using the ACSL TAKEOFF ground control application.
  *For details on how to create a flight plan and upload it to the aircraft, please refer to the ACSL TAKEOFF ground control application user manual.
- Complete the preflight checklist in the ACSL TAKEOFF ground control application.
- Panned flight will commence immediately following automatic takeoff, or when the controller's control mode switch is set to the AUT position while in flight.
- Upon completing the planned flight, the aircraft will initiate a hover at the final waypoint and Directional Pad (D-Pad) control will be initiated.
- At any time during a planned flight, it is possible to pause/resume; execute a Go Home, Go to Transmitter, or emergency landing, or switch to Directional Pad (D-Pad) control.
- To resume the planned flight after a Pause, Go Home, Go to Transmitter, or Emergency Landing, toggle the controller's flight mode switch to POS or MAN and then back to AUT. The aircraft will return to the aborted position of the planned flight and resume the planned flight.
  Planned flights can also be resumed by transferring a flight plan with the portion to be resumed from the ACSL TAKEOFF ground control application to the aircraft.
  For details on how to set the flight plan portion to be resumed, please refer to the TAKEOFF User manual.

Take-off button

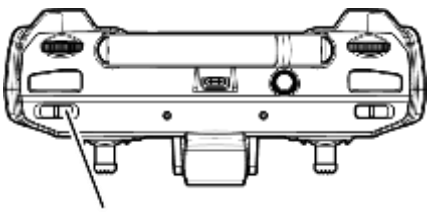

AUT



WARNING

There is a risk of flyaway or loss of control when flying in winds that are faster than the specified wind speed limit.


➔ Refer to 1.2.3. Limitations. Abort flight immediately if the wind speed exceeds the limit.

CAUTION

- Planned flights in auto (AUT) mode can only be performed when reception of GPS signals is good (as indicated by a blue GPS icon in the ACSL TAKEOFF ground control application).
- If GPS reception deteriorates during a planned flight in auto (AUT) mode[1], the planned flight will automatically be suspended, the aircraft will initiate a hover, and "Forced pause (hover)" will be displayed in the ACSL TAKEOFF ground control application. If the aircraft's position and speed can be measured by visual odometry using the on-board stereo cameras[2], then the hovering state will be continued using visual odometry. Immediately switch to manual (MAN) mode and land the aircraft in a safe location. Continuation of flight is not recommended.
  Note 1: Deterioration of GPS reception may be indicated by the status LED flashing red, a "GPS accuracy low" notification on the ACSL TAKEOFF ground control application or the controller, the GPS icon in the ACSL TAKEOFF ground control application turning red, or if the aircraft drifts or otherwise moves in a way that seems abnormal.
  Note 2: Refer to Section 7. Abnormal Operating Procedures for the recommended procedures when visual odometry cannot measure the aircraft's position or speed.
- The pilot is ultimately responsible for safety during all phases of flight, including planned flight in auto (AUT) mode. Always be aware of the aircraft's position and condition, work to ensure its safety, and be prepared for unforeseen circumstances.

6.3.13. 3 User-Defined Geofence

- To enforce a user-defined geofence, the geofence must first be created then uploaded to the aircraft using the ACSL TAKEOFF ground control application.
  *For details on how to create a geofence and upload it to the aircraft, please refer to the ACSL TAKEOFF ground control application user manual.
- The user-defined geofence function is only enforced in position (POS) and auto (AUT) modes.
- When approaching a no-fly zone, the aircraft begins to slow down, the ACSL TAKEOFF ground control application and controller display the alert message "Entered a no-fly area," the controller vibrates to warn the user, and the aircraft comes to a stop prior to crossing the boundary to a no-fly zone.

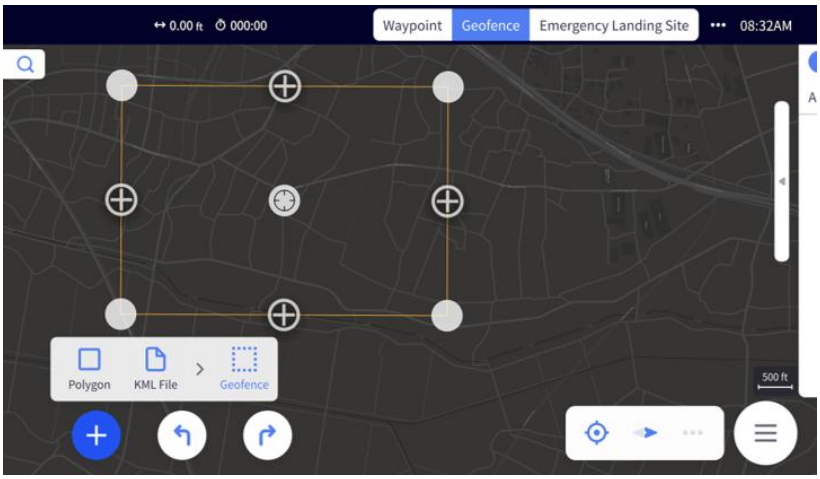

Geofence creation screen of the ACSL TAKEOFF ground control application

WARNING

Do not switch from manual (MAN) mode to position (POS) mode or auto (AUT) mode while the aircraft is flying in a no-fly zone of the user-defined geofence. The aircraft will automatically move horizontally to exit the no-fly area to the nearest allowable area and will not respond to inputs from the controller or the ACSL TAKEOFF ground control application.

ADVISORY

When the aircraft is located in a no-fly zone of the user-defined geofence, the controller and ACSL TAKEOFF ground control application will display "Entered a no-fly area" notification. Starting the motors while in position (POS) mode or auto (AUT) mode will be inhibited.

In Manual (MAN) Mode

[On ground]

The motors cannot be started when located within a no-fly zone of the user-defined geofence.
The motors cannot be started if a GPS location fix has not yet been achieved (i.e. it cannot be determined whether or not the aircraft is within a no-fly zone of the user-defined geofence).

[In flight]

The user-defined geofence is not enforced in manual (MAN) mode so flight into a no-fly zone of the user-defined geofence is allowed.

*The warning message "Entered a no-fly area" will be displayed when within a no-fly zone.

In Position (POS) Mode / Auto (AUT) Mode

[On ground]

The motors cannot be started when located within a no-fly zone of the user-defined geofence.
The motors cannot be started if a GPS location fix has not yet been achieved (i.e. it cannot be determined whether or not the aircraft is within a no-fly zone of the user-defined geofence).

[In flight]

When approaching a user-defined no-fly area, the warning message “Entered a no-fly area” will be displayed and speed will be reduced.

Upon reaching the boundary of the user-defined no-fly area, the warning or message “Entered a no-fly area” is displayed and the aircraft initiates a hover.

If the aircraft penetrated a user-defined no-fly area, the warning message “Entered a no-fly area” is displayed and the aircraft automatically moves toward the closest boundary of the no-fly area at a speed of 2 m/s (4.5 mph).

6.3.14. Altitude Limitations

- The maximum allowable altitude above takeoff location can be set in advance in the range of 5 to 3000 m using the ACSL TAKEOFF ground control application.
  *For details on how to set the altitude limit, please refer to the ACSL TAKEOFF ground control application user manual.
- The altitude limitation is only enforced in position (POS) and auto (AUT) mode.
- When approaching the altitude limit, the aircraft begins to decelerate, the ACSL TAKEOFF ground control application and controller display the warning message "Entered a no-fly area," the controller vibrates to warn the user, and the aircraft comes to a stop prior to crossing the altitude limit.

In Manual (MAN) Mode

The altitude limit is not enforced in manual (MAN) mode so flight above the altitude limit is allowed.
*The warning message "Entered a no-fly area" will be displayed when within a no-fly zone.

In Position (POS) Mode / Auto (AUT) Mode

[in flight]

When approaching the altitude limit, the warning message "Entered a no-fly area" will be displayed and speed will be reduced.

Upon reaching the altitude limit, the warning or message "Entered a no-fly area" is displayed and the aircraft initiates a hover.

6.3.15. Emergency Landing Using Ground Control Application

➔ Refer to Section 7.1.6: Emergency Landing Using Ground Control Application for more information.

6.3.16. Low Battery Emergency Landing

➔ Refer to Section 7.1.9: Low-Battery Emergency Landing for more information.

6.3.17. Forced Stop


➔ Refer to Section 7.1.7 Forced Stop Using the Controller.

➔ Forced Stop Using the Controller or Section 7.1.8: Forced Stop Using the Ground Control Application for more information.

6.4. Controller Multicast

6.4.1. About Multicast


This product is equipped with a multicast communication function. This function allows up to three controllers to be bound to one aircraft to simultaneously receive telemetry and video from the aircraft. While pilot authority is granted to only one controller at a time, it is possible to monitor the telemetry and video with up to two other controllers as long as the radio signal from the aircraft is within range.

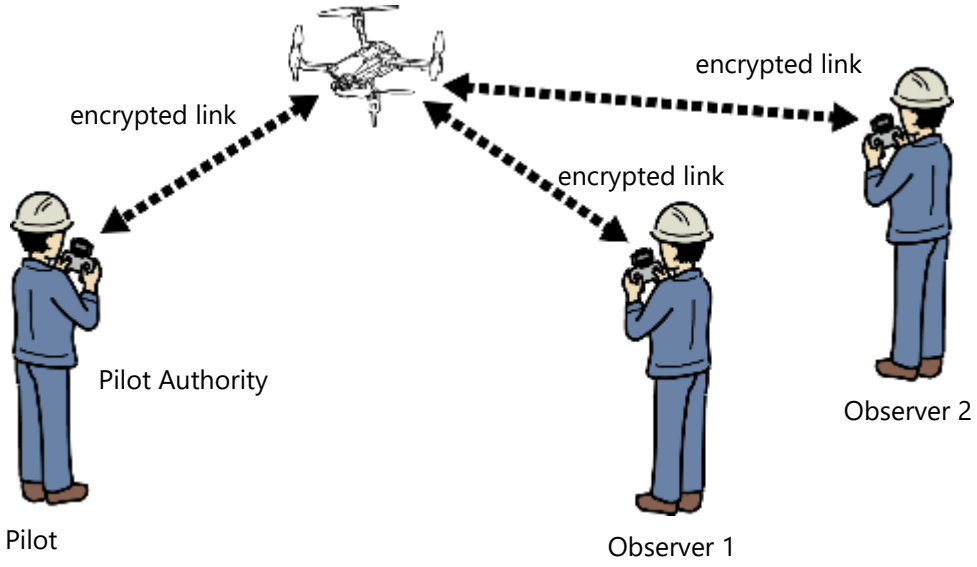

6.4.2. Fail-Safe when Multicasting

A fail-safe function is provided to allow transfer of pilot authority to an observer in the event of a loss of communication between the aircraft and the pilot controller. When the observer's controller displays "TO BE PILOT PUSH ENTER," the observer can obtain pilot authority by pressing and holding the Enter button.

Controller display	Details
ESTABLISHING CONNECTION	A communications failure has occurred and the aircraft is attempting to re-establish a connection.
TO BE PILOT PUSH ENTER	The aircraft is recruiting any bound controller within communication range to be granted pilot authority.
REQUESTING PILOT AUTH.	The operator has pushed the Enter button and the controller is attempting to request pilot authority from the aircraft. The aircraft grants pilot authority to the controller whose request was received first.

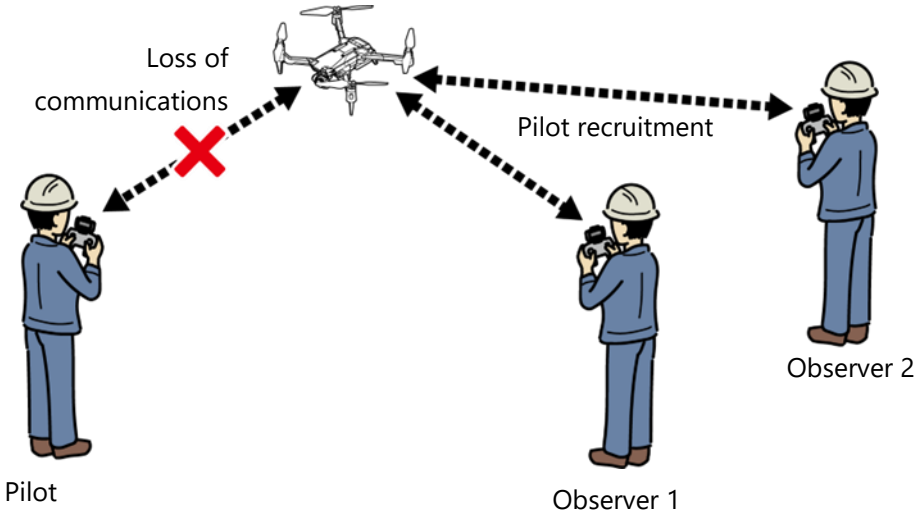

6.4.3. Switching Pilots

When at least 2 controllers are bound to the aircraft, the pilot may release pilot authority at any time by simultaneously pushing the Enter and Pause buttons.
The aircraft then begins recruiting for a new pilot.
If no controller requests pilot authority, then no pilot authority will be granted.


Controller display	Details
REQUESTING PILOT AUTH.	Requesting release of pilot authority

CAUTION

Switching from pilot mode to observer mode is inhibited while in lesson mode (optional, Japan only) and during a firmware update.

6.5. Lesson Mode (Japan only)


- Flight training can be performed using a pair of controllers that are equipped with 920 MHz training radios (Japan only). To do this both controllers must be set to “lesson mode”.
- In the lesson mode, one controller is set to teacher mode and the other to student mode. The teacher can transfer/retrieve pilot privileges at any time.

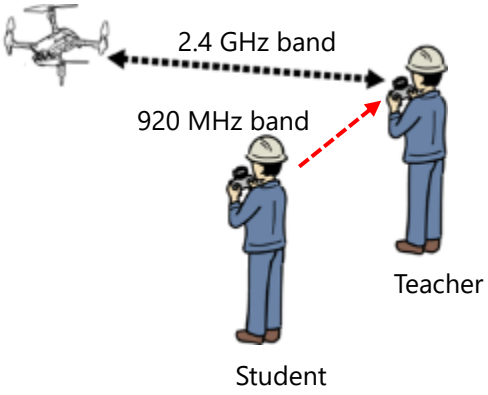


6.5.1. Setup

1. Setting GROUP ID

- To access the controller system settings menu with the controller powered off, press the power button while holding down the Enter button. From the “GROUP ID” setting in the system setup screen, select a group ID so that the teacher and student are using the same group ID.







> CAUTION
>
> If multiple aircraft in the vicinity are to operate in lesson mode simultaneously, make sure that each aircraft is set to a different Group ID.

2. LESSON Setup

- From the “LESSON” setting in the system setup screen, select “TEACHER” for the teacher’s controller and “STUDENT” for the student’s controller.






6.5.2. How to Operate

- Verify that the status LED on the teacher's controller is solid purple.
- Verify that the status LED on the student's controller is undulating purple.



Teacher’s controller: solid purple, student’s controller: undulating purple

- When lesson mode is enabled, the obstacle avoidance switch is used by the teacher to switch between granting (ON) and revoking (OFF) pilot authority to the student.
- If the teacher senses any abnormality or danger in the student's operation, the teacher can forcibly take pilot authority at his/her discretion.

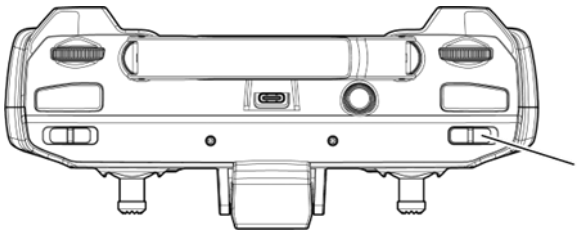

CAUTION

- The collision avoidance function is inhibited during lesson mode.
- If communication between the student’s and teacher’s controllers is interrupted, pilot authority is automatically transferred to the teacher's controller. On the other hand, if communication between the teacher’s controller and the aircraft is lost, pilot authority is not transferred to the student and the aircraft will enter emergency mode.
- When using lesson mode, make sure that any other SOTEN in the vicinity of the planned training location (within 150 m or 500 ft) are not being used for training or that they are set to use a different Group ID.
- The maximum number of SOTEN that can be used for training in the same vicinity simultaneously is 3 (3 controllers for 3 teachers and 3 controllers for 3 students).
- Since information regarding the transfer of pilot authority between teacher and student in lesson mode is not encrypted, accidental use of the same group ID by 2 teacher-student pairs in the same vicinity may result in inadvertent switching between teacher and student of one pair due to switching by the other pair. However, since the control signals are encrypted, the control signals of each pair will not interfere with each other.
- Do not attempt multicast (connecting a third controller) during training sessions. Only two controllers (teacher and student) should be connected to one aircraft for training.
- When the lesson is complete, return the controller to the “NORMAL” setting from the “LESSON” setting in the controller’s SYSTEM settings menu.

ADVISORY

If the controller is powered ON, press and hold the Go-Home button on the controller for 3 seconds to enter the system settings screen. In this case, the “LESSON” and “GROUP ID” options will not be displayed.

To configure “LESSON” and “GROUP ID,” start with the controller powered OFF. Then, press the power button while holding down the Enter button to open the system setup screen.

6.6. Regional Market Geofence

- The aircraft is pre-programmed with a regional market geofence to prevent use outside the boundaries of the region of authorized use. For example, ACSL SOTENs that are sold in the United States contain a regional market geofence to prevent use outside of the United States and U.S. Territories.
- If the aircraft approaches the regional market geofence within 100 m (330 ft), the controller vibrate to alert the user, and the controller and ACSL TAKEOFF ground control application will display the following caution: “Nearing unpermitted area”.
- If the aircraft approaches the regional market geofence within 30 m (98 ft) while operating in position (POS) or auto (AUT) mode, the aircraft will automatically enforce a reduced speed limit and will come to a complete stop (hover) when it reaches the geofence.
- If the aircraft approaches the regional market geofence within 30 m (98 ft) while operating in manual (MAN) mode, the aircraft will automatically initiate a hover and enter emergency mode.

ADVISORY

If the aircraft is carried outside of the regional market geofence, the controller and ACSL TAKEOFF ground control application will display the warning: "Entered unpermitted area" and the ability to start the motors will be inhibited.

With a GPS location lock (indicated by a blue GPS icon in the ground control application), the conditions for takeoff are:

- In manual (MAN) mode, the aircraft must be within and at least 30 m (98 ft) away from the regional market geofence.
- In position (POS) or auto (AUT) mode, the aircraft must be within the regional market geofence.

Without a GPS location lock (indicated by a red or yellow GPS icon in the ground control application), the conditions for takeoff are:

- Manual (MAN) and position (POS) modes only.
  *In position mode, the aircraft can take off with visual odometry only when the vision accuracy is good (indicated by a blue vision icon in the ground control application).
- The aircraft must have acquired a GPS location lock at some point since powering on, and that location lock must have been within and at least 30 km (19 miles) from the regional market geofence.


DISCLAIMER:
As described in Section 1.1.1 above, ACSL does not warrant or guarantee the “reginal market geofence” functionality described in this Section 6.6 nor assume any liability for any damage(s) or injuries caused to you, to any other party or any property or have any legal responsibility, directly or indirectly, from the use of this product and for any violations of applicable laws, rules and regulations. You are solely responsible for

complying with all laws, rules and regulations applicable to the operation of the aircraft near national borders and in restricted areas.

6.7. RTK Flight (Option)

By connecting the optional RTK-SOTEN unit to the aircraft, you can perform high-precision, RTK-assisted flight operations. For instructions on preparing for RTK flight operations, refer to Section 5.7 "Pre-Flight RTK Inspection (Option)."

6.7.1. System Overview of Network RTK Positioning

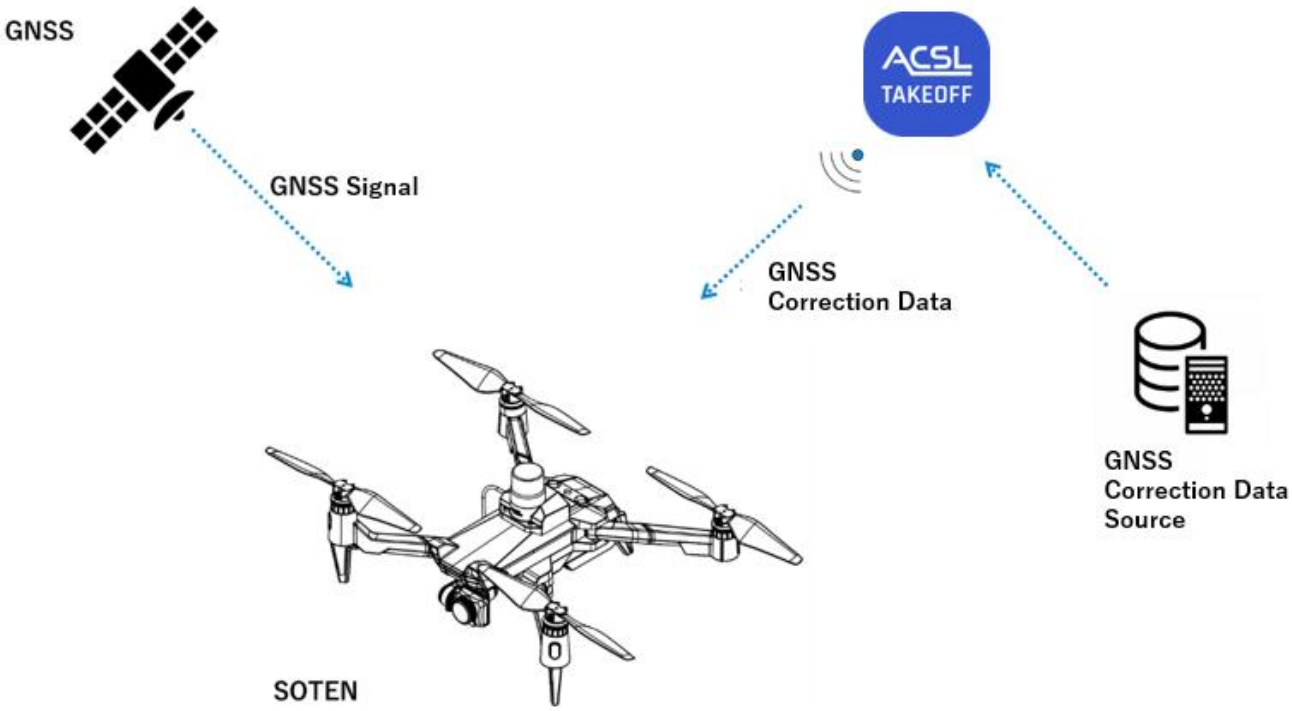

6.7.2. Overview of System Functions

No.	Item	Function
1	GNSS satellite/signal	Receives signals from GNSS satellites and uses them to determine the aircraft's position. Supports GPS, Galileo, SBAS, and QZSS satellite systems.
2	TAKEOFF application	Receives the correction data required for RTK positioning from a GNSS correction data source.
3	GNSS correction data source	Provides the correction data required for RTK positioning.

6.7.3. RTK Flight Precautions

CAUTION

When the RTK-SOTEN unit is connected to the aircraft, Vision-based positioning is disabled until the aircraft is powered off. Exercise extreme caution when flying in areas with poor GNSS signal reception, such as indoors or outdoors near buildings, trees, or other obstructions.

During flight, closely monitor the RTK status in the Flight View and any displayed messages. If the RTK icon disappears or the warning message "RTK not available" is displayed, immediately land the aircraft in a safe location.

Chapter 7

Abnormal Operating Procedures

7.1. Emergency Procedures for Abnormalities 140

7.1. Emergency Procedures for Abnormalities

This section describes emergency procedures in the event of an abnormality with the aircraft in flight.



Failure to comply with the following precautions and instructions may result in an unexpected collision or crash that could cause injury, fire, or damage.

- Pilots should carefully read and fully understand the contents of this chapter and be prepared to respond to any malfunction that may occur while the aircraft is in flight.

7.1.1. Definition of Terms

The emergency procedures used in this section are defined as follows:

- **Drop the aircraft immediately.**
  Immediately after confirming the safety of the area directly under the aircraft, use the “forced stop” function of the controller or ACSL TAKEOFF ground control application to force the motors to stop and the aircraft to drop on the spot.
  If not dropping immediately, injury or damage to the pilot and third parties may result.
- **Immediately land the aircraft at a safe location.**
  Land the aircraft immediately at the nearest safe location.
  Continued flight beyond the nearest safe location may result in the aircraft crashing.
- **Land the aircraft in a safe place as soon as possible.**
  Land the aircraft at the takeoff position or at a pre-determined emergency landing point.
  Do not take off again until the cause of the aircraft abnormality is determined and resolved.

7.1.2. Manual (MAN) Flight Mode (using the controller)


- Manual mode should be used whenever the aircraft cannot reliably measure its position or velocity with GPS or visual odometry.
- Land the aircraft in a safe place as soon as possible. Do not continue the flight in manual mode.
- For information on how to operate the aircraft in manual mode, refer to Section 6.2.2: Basic Manual Mode (MAN) Operations.

7.1.3. GPS and Visual Odometry Accuracy Degradation

- If the accuracy of GPS and visual odometry degrade during flight, the status LED on the aircraft will flash red and a message will appear on the ACSL TAKEOFF ground control application and controller LCD display screen.
  ➔ Refer to Section 7.1.11: Indications of an Abnormality.
- Not a suitable place for flying.

On the ground

The ability to take off (i.e. the ability to increase motor speed above idle) is inhibited in position (POS) mode while the status LED is flashing red.

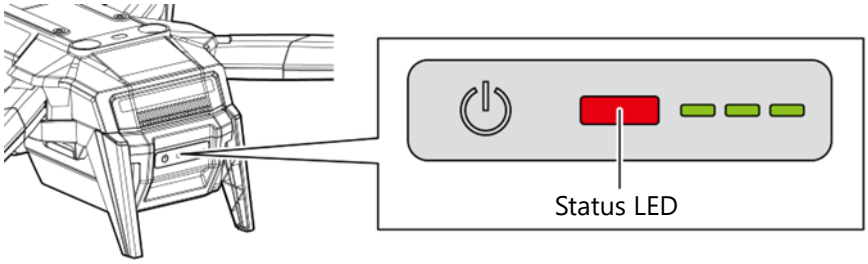

In Flight

- **Manual (MAN) mode**

  Continuation of flight is possible.

  ➔ Refer to Section 6.2.2 .Basic Manual Mode (MAN) Operations.

- **Position (POS) mode**

  Switch to manual mode and land the aircraft in a safe location as soon as possible.

CAUTION

- If GPS accuracy deteriorates while flying in position (POS) mode, the aircraft will automatically switch its source of position information from GPS to visual odometry if the speed is lower than around 1 m/s (2.2 MPH) and vision accuracy is good.
- *When switching to visual-odometry-based position mode, the maximum ground speed is limited to 2 m/s (4.5 MPH) and vertical speed will be 1 m/s (2.2 MPH).
- If vision accuracy deteriorates while flying in visual-odometry-based position mode, the status LED on the aircraft will flash red. Control will fall back to a mode similar to manual (MAN) mode due to loss of position information. Do not continue flight and land the aircraft at a safe location as soon as possible.

- *To suppress erratic movements and to aid maneuverability during the transition, the maximum tilt angle is limited to approximately 13° in position (POS) mode when GPS and vision accuracy is degraded.
- If the controller's flight mode switch is set to position (POS) mode, when GPS or vision accuracy is restored, the aircraft's status LED will cease flashing red and the aircraft will automatically return to position control with either GPS or visual odometry.

- **Auto (AUT) mode**

➔ Refer to Section 7.1.10: Degraded GPS Reception in Auto .

7.1.4. Emergency Menu

- If, for example, communication between the controller and the aircraft is disrupted, the aircraft will transition to emergency mode.
  Note: Refer to Section 7.1.5: Communications Disruption for information on what to do in the event of communication interruption.
- Maneuver the aircraft according to the following emergency mode operating procedure.

ADVISORY

In the safety features settings of the ACSL TAKEOFF ground control application, the time until Go Home / Emergency Landing is triggered can be set from 30 to 120 seconds in 30-second increments.
If "Continue Hovering" is selected, the aircraft will continue hovering.

■ Emergency Mode Operating Procedure

Select one of the following operations

① **Piloting with the ACSL TAKEOFF ground control application.**

- The Emergency Menu (6 buttons) will appear automatically on the ACSL TAKEOFF ground control application.
- Select the following normal or emergency operating procedure.
  *For details of each function, refer to Section 7.1.6: Emergency Landing Using Ground Control Application or Section 0:
  Forced Stop Using the Controller.
  *If an electrical abnormality is detected during flight while in position (POS) or auto (AUT) mode, only automatic landing, emergency landing, and forced stop may be selected. The emergency menus is not shown in manual (MAN) mode.



Emergency Menu-1



Emergency Menu-2

(When an electrical abnormality is detected during flight in POS or AUT mode)



Emergency Menu-3

(When an electrical abnormality is detected during flight in MAN mode)

② **After switching the controller's flight mode switch to another mode, return to the originally selected mode and continue piloting with the controller.**

Feature		Menu button	Description
Normal operation	Go Home	Go Home	Return to a position 10 meters above the takeoff point and perform an auto landing.
	Go to Transmitter	Go to Transmitter	Fly in a straight line to and hover at a position above the controller.
	Auto landing	Landing	Automatically land on the spot.
	Directional Pad	D-Pad	Manual operation using the D-Pad. Pressing any button once will result in a certain amount of motion. Holding it down will not cause any further changes.
Emergency operation	Emergency landing	Emergency landing	The aircraft moves to the ELS point or takeoff point and lands automatically.
	Forced stop	Forced stop	Stops the motors.

ADVISORY


- If the aircraft does not receive any commands from the pilot within 60 seconds, then the aircraft will automatically either Go Home or proceed to an emergency landing site (ELS).
- Plan your flight and make sure that the altitude settings are high enough so that the aircraft will not encounter any obstacles should it need to Go Home or proceed to an emergency landing site (ELS).

7.1.5. Communications Disruption


When the SOTEN is in flight operation and the distance between the aircraft and controller is within the communication distance (SOTEN Operation Manual "1.2.3 Limitations"), but reception is interrupted (communication interruption) or the camera view image on the TAKEOFF application is interrupted and "Waiting for video" is displayed (video interruption), the signal interruption may be recovered by changing the distance between the aircraft and the controller while moving the pilot's standing position.
When radio communication is interrupted, the operator should attempt to restore radio communication by referring to the following procedure.

1. Signal interruption has occurred


- When communication is lost, the status LED on the controller turns solid red.
- When the controller status LED is blinking or undulating green, the controller and TAKEOFF cannot be piloted. Please make sure there is a pilot controller connected to the aircraft, or recover pilot authority if necessary.



Blinking Green:
During Pilot/Observer Switching




Undulating Green:
Controller is in Observer Mode




Solid Red:
Controller is disconnected

- When a video interruption occurs, the message "WAITING FOR VIDEO FEED" is seen on the camera view.

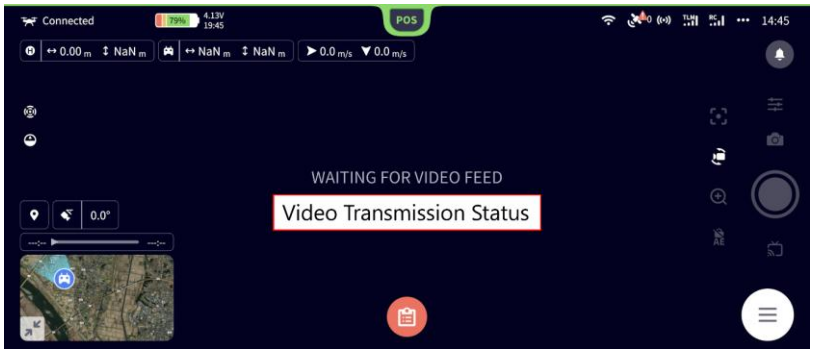


2. While pointing the controller's antenna plane toward the aircraft, the operator should move to a position where radio communication is restored.

- Pointing the flat portions of the controller's two antennas toward the aircraft facilitates communication recovery.
- When the controller status LED goes from solid red to blinking green or undulating green, communication has been restored.

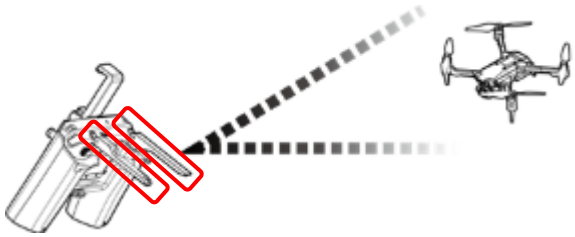


- Adjusting the direction of the antenna and at the same time moving the pilot's standing position relative to the aircraft will help to get out of areas prone to signal interruption and make it easier to recover radio communication. (See note).

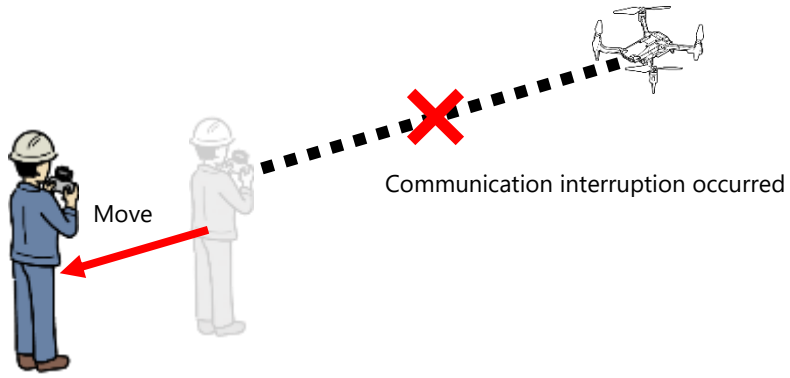

3. Restoration of control


- Once communication is lost, control of the aircraft via the controller is no longer possible. If multiple transmitters are paired, after the controller status LED blinks green and the message "TO BE PILOT PUSH ENTER" appears on the LCD display, press and hold the Enter button on the controller to regain control of the aircraft.
- When pilot authority is restored, the controller status LED will return to a solid green.





4. Emergency mode deactivated


- Emergency mode can be deactivated by toggling flight modes with the controller's flight mode switch. Note: See 7.1.4. Emergency Mode.

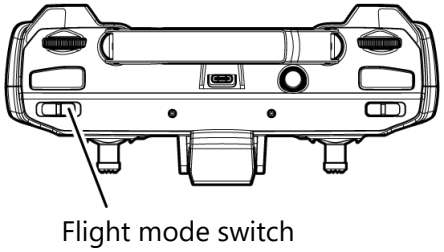

ADVISORY


Effects of multipath-induced fading


Radio waves are emitted from the controller's antennas in all directions (with varying amplitude). If there is no obstruction, then some waves will reach the aircraft in a straight line (direct waves). Some other waves may reach the aircraft by bouncing off the ground, trees, buildings, uneven terrain, other objects, etc. (reflected waves). The phenomenon of some combination of direct and reflected waves arriving at the same location is called "multipath".

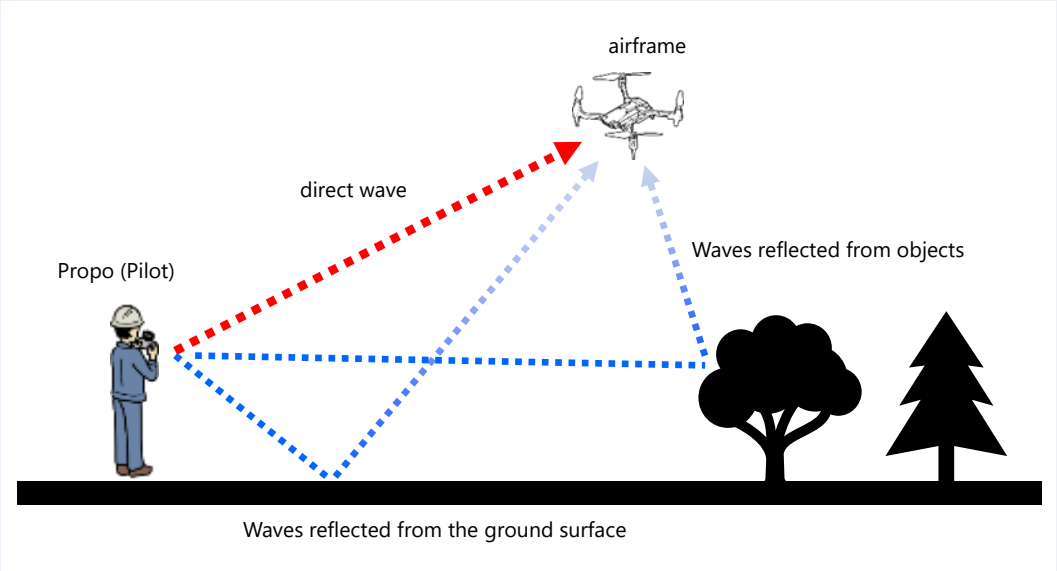

Conceptual diagram of multipath

Since direct waves and reflected waves travel different distances to arrive at the same location, reflected waves will arrive with a phase delay compared to direct waves. If the reflected waves arrive at the aircraft with nearly the same phase as the direct waves, then the waves will combine into a strengthened, or amplified, wave. If the reflected waves arrive at the aircraft with nearly opposite phase from the direct waves, then the waves will cancel each other into a weakened, or attenuated, wave. This phenomenon of multipath waves cancelling is called "multipath-induced fading".

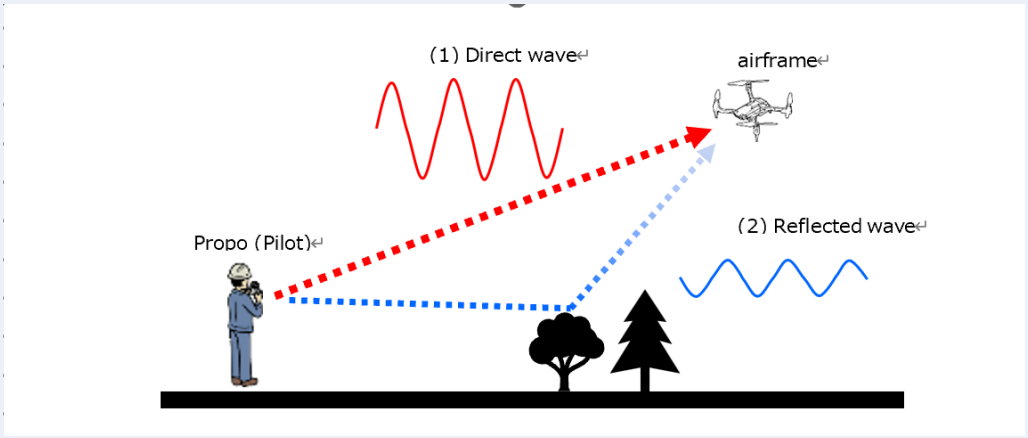

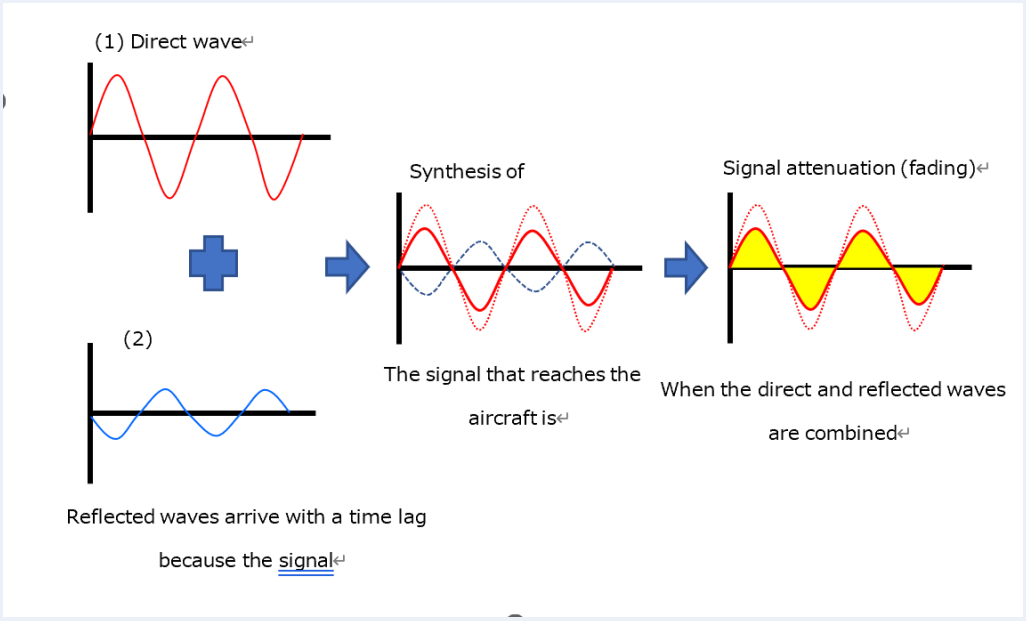

Conceptual diagram of multipath-induced fading


A location where multipath waves completely cancel each other out is called a “null point”. If the aircraft happens to move into a null point of the controller, then the signals for the controller will be too weak to be received, resulting in a communications disruption. The same is true for the controller receiving signals from the aircraft.

ADVISORY

Signal strength vs. distance and recovery from communications disruption

The relationship between received signal strength and distance from the transmitter for unobstructed line-of-sight without any reflected waves is shown by the black line in the figure below. Notice that the received signal becomes weaker as distance increases. In reality, however, multipath-induced fading may cause received signal strength to decrease suddenly at a certain distance only to strengthen again at a slightly further distance. It is difficult to predict at what location this could occur, since multipath-induced fading is a complex phenomenon that is influenced strongly by the composition and geography of the surroundings, the characteristics of the aircraft and controller antennas, radios, internals, environmental conditions, etc.

If the aircraft approaches a null point of the controller, or vice versa, the signal may become too weak, resulting in a communications disruption. The aircraft may automatically halt its motion in response to the communication disruption, thereby remaining in the null zone. As can be seen from the figure below, an effective way to recover from a communication disruption caused by entering a null zone is for the pilot to simply move to a different location, particularly toward or away from the aircraft, thereby changing the location of the null zone.

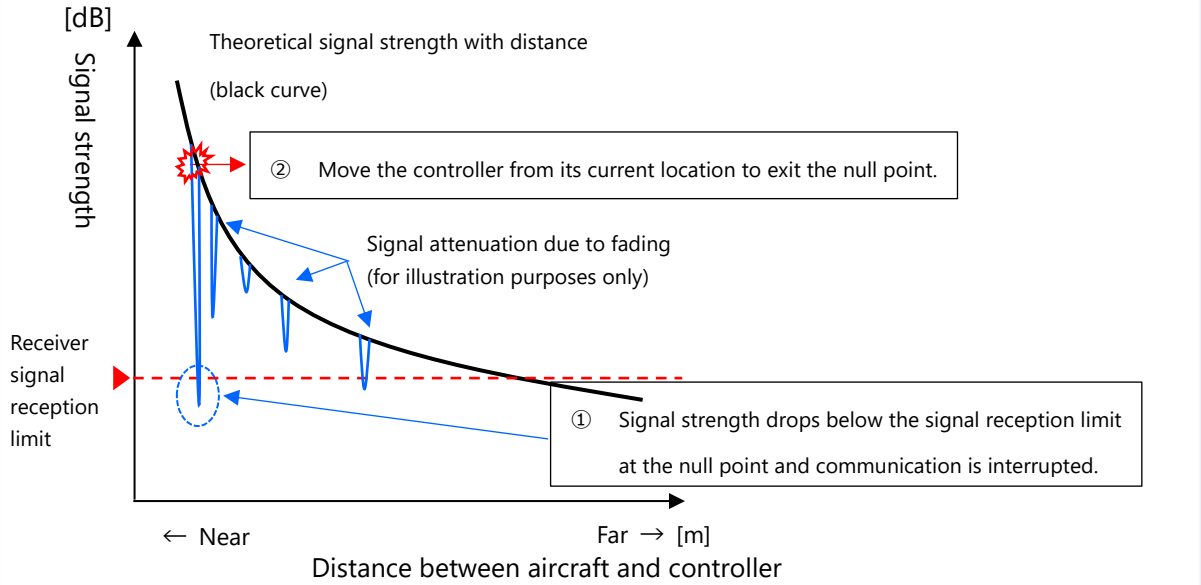

Relationship between signal strength, distance, and null points

7.1.6. Emergency Landing Using Ground Control Application

- If an abnormality is detected in the aircraft during flight and it becomes difficult to continue the flight, the system has a function to return the aircraft to the emergency landing site (ELS) or takeoff point in order to land the aircraft safely.
- Please refer to the ACSL TAKEOFF ground control application user manual for the ELS setting method.
- If an ELS is not set, or when in manual (MAN) mode or position (POS) mode, the aircraft returns to the takeoff point.

①

■ Emergency landing procedures

②


Press the Command Menu button on the ACSL TAKEOFF ground control application to display the Command Menu.

Press the Emergency Landing button and confirm the instructions in the modal dialog.

■ Situations requiring an emergency landing

- When the remaining battery power is too low to reach the destination
- When weather conditions along the flight path are likely to exceed operational limits

- When communication between the controller and the aircraft is lost

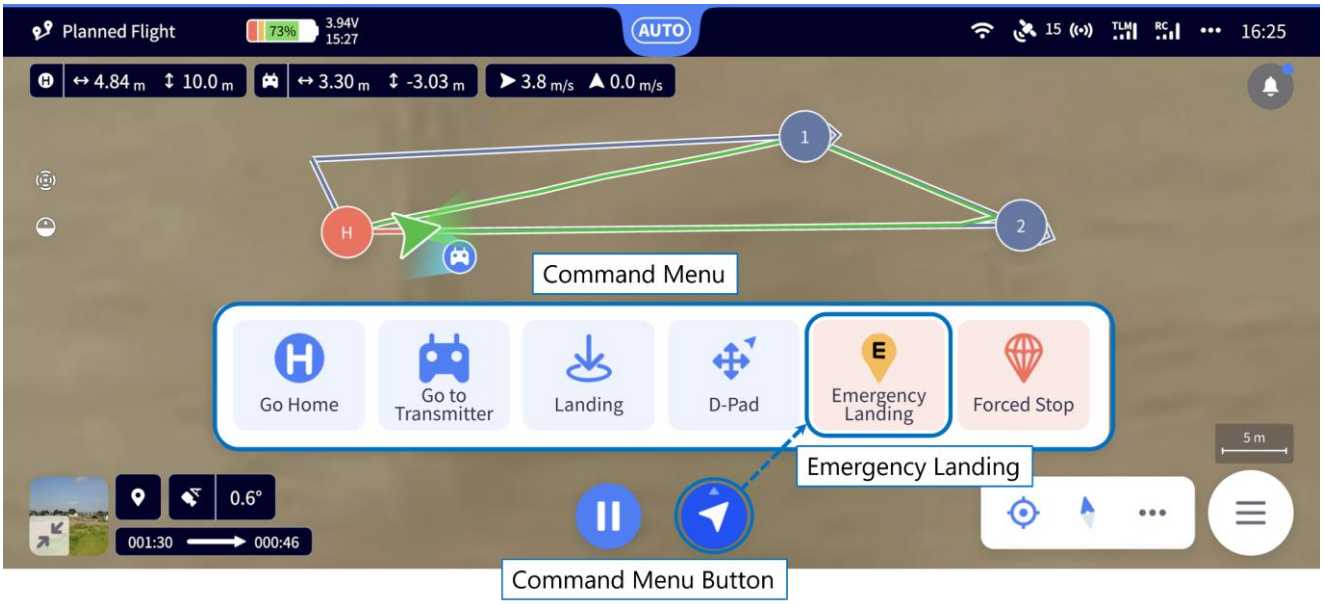

Emergency Landing Site (ELS) Type

type	travel route
Direct	• Moves along a straight path to the ELS while descending.
Via an approach point	• Moves along a straight path relative to the ELS while maintaining the current altitude. • From the approach point (20 m horizontal distance from the ELS), descend to the specified altitude. • If the altitude of the ELS is higher than the current altitude, moves in a straight line to the ELS.
Routing	• Specify the waypoints to each ELS when creating the flight plan. • After moving the flight plan route to the specified waypoint, moves in a straight line to the ELS.

ADVISORY

- An emergency landing can be initiated from any flight mode, but an emergency landing to an emergency landing site (ELS) can only be initiated during planned flight in auto (AUT) mode.
- Plan your flight and make sure that the altitude settings are high enough so that the aircraft will not encounter any obstacles should it need to Go Home or proceed to an emergency landing site (ELS).

7.1.7. Forced Stop Using the Controller

- To ensure maximum safety for pilots and third parties, the aircraft is equipped with a “forced stop” function that forcibly stops the aircraft's motors.
- In the unlikely event of unintended movement of the aircraft, or if the surrounding environment changes significantly or otherwise becomes unsafe, check the safety of the surroundings and immediately drop the aircraft.


Forced stop procedure

Press the EMERGENCY (force stop) button on the controller.

Possible situations requiring a forced stop

- When an unintended movement takes the aircraft out of the safety zone
- When there is a possibility of coming into contact with people or property
- When people or objects are approaching rapidly

①

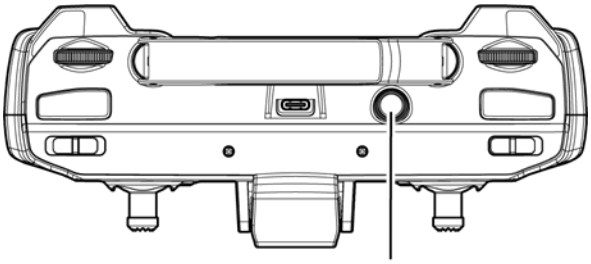

EMERGENCY BUTTON

WARNING

Failure to comply with the following may result in an unexpected collision or crash that could cause injury, fire, or damage.

- In the case of a forced stop, make the utmost effort to drop the aircraft where there are no people or structures.

CAUTION

- Even after the emergency button is pressed, the motors will continue to rotate with inertia and will not stop instantly.
- Familiarize yourself with the location of the emergency button on the controller before flight.
- Be careful not to push the emergency button unintentionally during flight. It will result in crash.


7.1.8. Forced Stop Using the Ground Control Application

- To help provide maximum safety for pilots and third parties, the aircraft is equipped with a “forced stop” function that forcibly stops the aircraft's motors.
- In the unlikely event of unintended movement of the aircraft, or if the surrounding environment changes significantly or otherwise becomes unsafe, check the safety of the surroundings and immediately drop the aircraft.

Forced stop procedure

Press the Command Menu button on the ACSL TAKEOFF ground control application to display the Command Menu.

Press the Forced Stop button and confirm the instruction in the modal dialog.

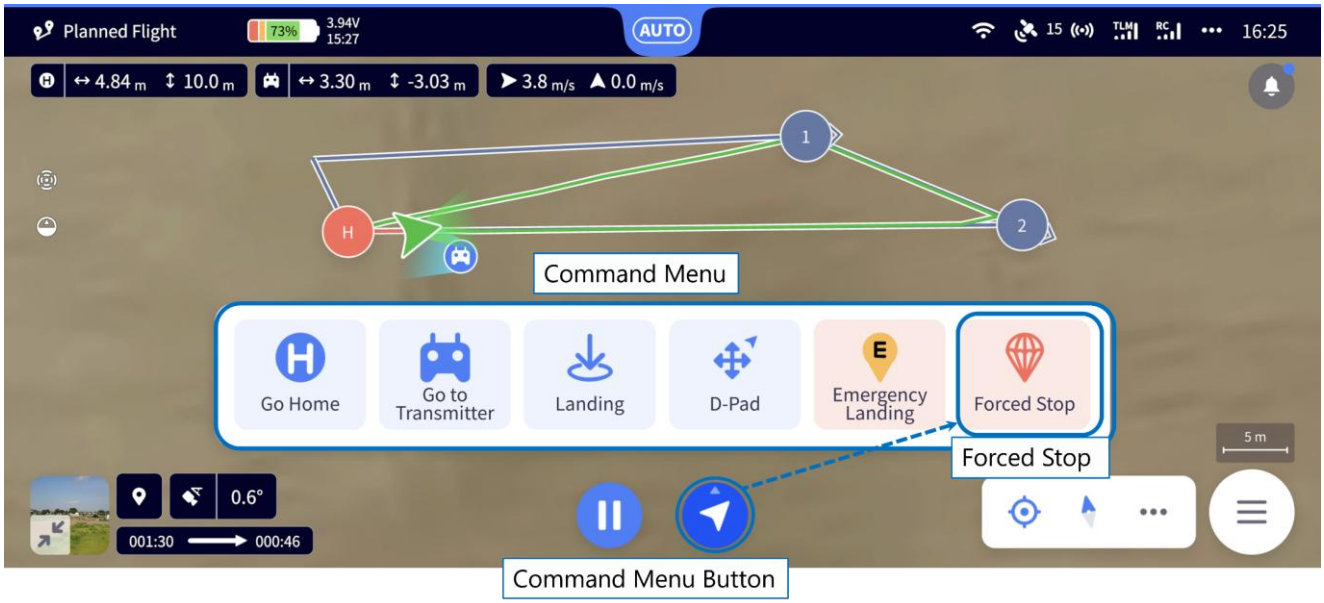

Examples of possible situations requiring mandatory suspension

- When an unintended movement takes the aircraft out of the safety zone
- When there is a possibility of coming into contact with people or property
- When people or objects are approaching rapidly

WARNING

Failure to comply with the following may result in an unexpected collision or crash that could cause injury, fire, or damage.

- In the case of a forced stop, make the utmost effort to drop the aircraft where there are no people or structure.

CAUTION

- Even after the emergency button is pressed, the motors will continue to rotate with inertia and will not stop instantly.
- Familiarize yourself with the location of the emergency button in the ACSL TAKEOFF ground control application before flight.
- Be careful not to push the emergency button unintentionally during flight.

7.1.9. Low-Battery Emergency Landing

- If the battery power drops below 6%, an emergency landing function automatically lands on the spot to ensure maximum safety for the pilot and third parties in the event of a crash.
- Automatically lands on the spot if GPS reception deteriorates while in emergency mode.
- The status LED on the aircraft blinks white and “Forced landing” is displayed on the controller and ACSL TAKEOFF ground control application.
- During an emergency landing, while the throttle stick on the controller is held fully upward, the automatic descent will stop and the aircraft will hover in place. The descent will continue when the throttle stick is released from the fully upward position.
- During an emergency landing, the aircraft cannot be switched to auto (AUT) mode.

Position (POS) mode

- During an emergency landing, it is still possible to control the horizontal position and heading of the aircraft while it is descending automatically. When "Takeoff and Landing Simplified Mode (POS)" is enabled, horizontal and heading control is possible until the aircraft descends to 0.5 m (1.6 ft) above the ground. For the automatic descent to continue from 0.5 m (1.6 ft) above the ground, the controller sticks must be centered.
- The speed during automatic descent is governed by the "User Operation Maximum Descent Speed" found in the Safety Functions tab of the aircraft setting in the ACSL TAKEOFF ground control application.
- After auto-landing, the aircraft will automatically stop its motors.

Manual (MAN) mode

- During an emergency landing, it is still possible to control the attitude and heading of the aircraft while it is descending automatically until the aircraft reaches 3 m (9.8 ft). At 3 m (9.8 ft) above ground level, the automatic descent stops and full manual control is returned to the pilot.
- The speed during automatic descent is governed by the "User Operation Maximum Descent Speed" found in the Safety Functions tab of the TAKEOFF ground control application.
- Landing and stopping the motors must be performed manually.



- Injury to the pilot or third parties or damage to the aircraft caused by a low-battery emergency landing is not covered by the warranty.



- Continually monitor the battery level during flight and land the aircraft in a safe location before the battery level falls to 6%.
- If communication between the controller and the aircraft is lost, it will not be possible to issue any commands to the aircraft.
- An emergency landing on uneven ground may cause the aircraft to tip over.

7.1.10. Degraded GPS Reception in Auto Flight Mode

- If GPS reception deteriorates during a planned flight (see note), the planned flight is automatically aborted and the aircraft hovers in place.

Note: If the status LED flashes red, the base station app or controller displays a “GPS accuracy low” error, or the aircraft becomes unstable, GPS reception may have deteriorated.

- If the aircraft's position and speed can be measured by visual odometry using the stereo cameras, the aircraft will continue the hovering condition using visual odometry (see note). Switch to position (POS) or manual (MAN) mode and land the aircraft in a safe location as soon as possible.
  Note: See ‘2.3.2. Overview of the Visual System.’
- When visual odometry cannot measure the position or speed of the aircraft, it cannot hold the position of the aircraft. The aircraft will move slowly, subject to wind and other factors. Switch to manual mode and immediately land the aircraft in a safe location.

CAUTION

- Continued flight to any site other than a safe landing site is not recommended.
- If the aircraft's position and speed cannot be measured by visual odometry, the aircraft's position will not be displayed on the ACSL TAKEOFF ground control application. The pilot should continuously, visually track the aircraft and be prepared to visually navigate the aircraft at any time.

7.1.11. Indications of an Abnormality

There are three types of indications in the event of an abnormality.

The Aircraft's Status LED


- When the aircraft is unable to accurately determine its location with GPS and visual odometry, the status LEDs will indicate the following patterns.

Status LED indication when the aircraft is powered on			
Flight mode	Mode indication	GPS and visual odometry abnormality	Aircraft abnormality
Manual mode Switch position: MAN	Blinking yellow	Blinking red	Blinking white
Position mode Switch position: POS	Blinking green		
Auto mode Switch position: AUT	Blinking blue		
All modes Switch position: Any (Auto takeoff and landing)	Blinking purple		

① ② ③


ACSL TAKEOFF ground control application

- A notification will appear on the right side of the screen. For details, please refer to the ACSL TAKEOFF ground control application user manual.

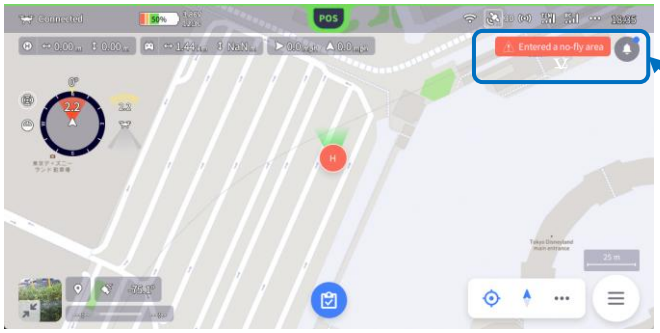

Controller LCD screen

- The center of the controller's LCD screen displays warning messages and other information about the aircraft and controller.

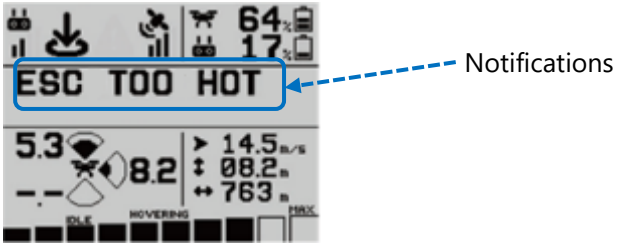


7.1.12. Stick Calibration


If the warning message “STICKS NOT CENTERED” appears even though the controller's left and right sticks are in the center position, perform stick calibration.

> ADVISORY
>
> If you are unable to start the motors, even after successfully completing the troubleshooting steps described in Section 9.1.1: Aircraft Troubleshooting, it may be an indication that the sticks are out of calibration.


1. To access the controller system settings menu with the controller powered off, press the power button while holding down the Enter button. To access the menu while the controller is powered on, press the go-home button for 3 seconds.

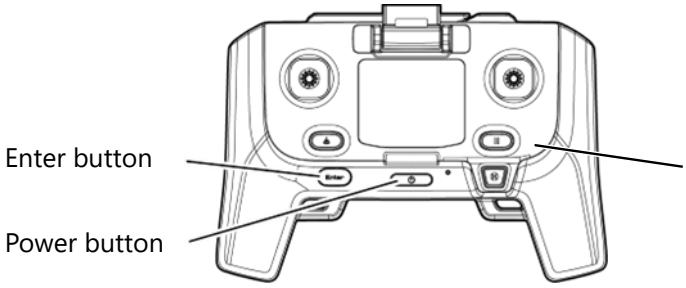


System settings screen




2. Move the cursor to “CALIBRATION” by operating the left stick on the controller and then press the Enter button.

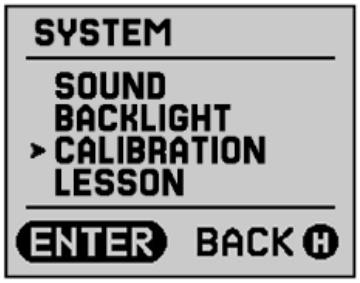


3. Move the cursor to “RUN” by operating the left stick on the controller and then press the Enter button.




4. When “RELEASE STK” appears, release the left and right sticks and press the Enter button.
Wait until “ROTATE STK” is displayed.




5. **When "ROTATE STK" is displayed, rotate the left along the limits of its range of motion at least three times at a speed of about 5 seconds per revolution.**




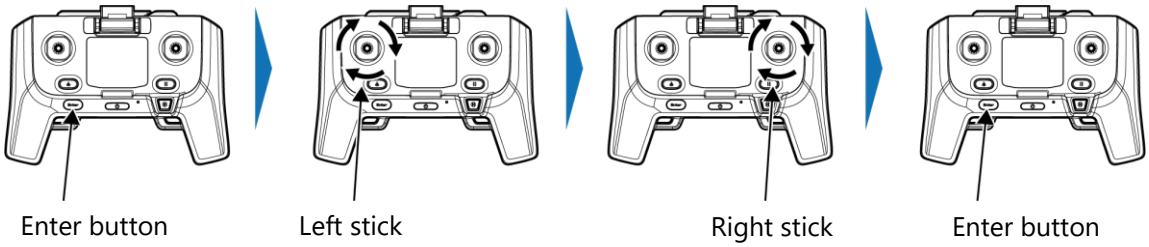

6. **Rotate the right stick in the same way. Then press the Enter button.**


7. **"SUCCESS" is displayed when the trim function is successfully completed.**
If the message "FAILURE" is displayed, repeat the above procedure.






8. **Press the Enter button to return to the system menu.**


9. **To confirm that the calibration was successful, move the cursor to "CALIBRATION" by operating the left stick on the controller, and press the Enter button.**

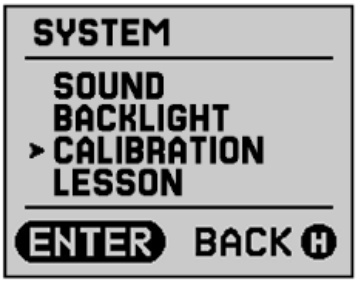

10. **Move the cursor to “CHECK” by operating the left stick on the controller and press the Enter button.**



11. **A screen will appear on which you can check the stick position numerically, so be sure to check that it is “0000” with your hands off the sticks.**



display	Contents	Details
L VER	Left stick up/down	[Lower] -1000 to 1000 [Upper]
L HOR	Left stick left/right	[Left] -1000 to 1000 [Right]
R VER	Right stick up/down	[Lower] -1000 to 1000 [Upper]
R HOR	Right stick left/right	[Left] -1000 to 1000 [Right]

ADVISORY

- If “0000” is not shown when the sticks are released, control of the aircraft will be affected. Start the calibration procedure over from the beginning.
- If, after repeating the calibration procedure, “0000” is still not shown when the sticks are released, or if calibration fails, a stick may be malfunctioning.
- If stick malfunction is suspected, discontinue use immediately and contact your dealer.

7.1.13. Warning Messages

- The following pages list all of the warning messages that can appear in the ACSL TAKEOFF ground control application and on the controller. Also included is an explanation and required actions.
- When a warning message is issued, the controller alerts the user with sound and vibration.
  *For safety reasons, the warning sound cannot be muted even when SOUND is set to OFF in the controller settings.

Warning message	Explanation and required action
Camera not connected	The aircraft has not detected the presence of a camera. On ground: The ability to start the motors is inhibited. Attach a camera. In flight: Land the aircraft in a safe place as soon as possible. After landing reattach the camera.
GNSS is not measured	The aircraft has not successfully achieved a GPS lock since powering on. On ground: The ability to stat the motors is inhibited. Make sure that this aircraft is in a location suitable for the reception of GPS signal and wait for GPS lock as indicated by a blue GPS icon on the ACSL TAKEOFF ground control application. (This warning only occurs while on ground)
No market geofence data	The regional market geofence data cannot be retrieved from the aircraft's memory. On ground: The ability to start the motors is inhibited. If the warning persists, contact your dealer.
Nearing unpermitted area	The aircraft's GPS sensor is reporting that the aircraft is within 30 m (100 ft) of the regional market geofence, or the aircraft no longer has a GPS position lock and the most recent GPS position lock was within 30 km (19 miles) of the regional market geofence. On ground: • The ability to start the motors is inhibited unless reception of GPS signals is good (as indicated by a blue GPS icon in the ACSL TAKEOFF ground control application) and the flight mode is either position (POS) or auto (AUT). In flight: • Be aware that the aircraft will transition to emergency mode if the regional market geofence is crossed.
Entered unpermitted area	The aircraft's GPS sensor is reporting that the aircraft is outside of the regional market geofence. On ground: • The ability to start the motors is inhibited in position (POS) and auto (AUT) mode. Relocate the aircraft inside and further away from the regional market geofence. In flight: • The aircraft will automatically control its motion to stay within the regional market geofence. • If GPS reception is poor, control of the horizontal motion of the aircraft will not be possible.

Warning message	Explanation and required action
Remote ID error	The on-board remote ID module has either failed or not yet completed its self-test. On ground: • The ability to start the motors is inhibited. Make sure that the mobile device that is running the ACSL TAKEOFF ground control application is equipped with a GPS, has location services enabled, and is connected properly to the controller. If the warning persists, discontinue use and contact your dealer. In flight: • Flight may be continued but the aircraft may not be properly broadcasting its remote ID. If the warning persists, land as soon as is safely possible and restart the aircraft. If the warning persists, discontinue use and contact your dealer.
Sticks not centered	The controller has detected that the sticks are not centered. Allow the sticks to return to their center positions. If the warning persists, perform a stick calibration.
Flight data recorder error	Restart the aircraft. *If the warning message appears again, discontinue use, and contact your dealer.
Aircraft memory failure	EEPROM access failed. Restart the aircraft. *If the warning message appears again, discontinue use and contact your dealer.
Radio comms. disrupted	In flight: The aircraft is not receiving signals from the controller and will transition to emergency mode. ➔ See Section "7.1.4 Emergency Menu" for details. *When the signal interruption is restored, the emergency mode can be canceled by toggling the controller's flight mode switch.
System error	A system error has occurred. On ground: Restart the aircraft. *If the warning message appears again, discontinue use and contact your dealer. In flight: Immediately land in a safe location.
Binding to controller	The aircraft and controller are in the process of binding to each other. If connection is not established, perform the bind operation again. ➔ See Section 3.5 First Connection(binding)"
Radio signal weak	The radio signal has deteriorated. There is a high possibility that the connection will be disrupted. Ground: The ability to start the motors is inhibited. In flight: Switch to manual mode and land in a safe location immediately.

Warning message	Explanation and required action
Navigation calc. error	There is an abnormality in the speed or navigation calculations. Discontinue use and contact your dealer. On ground: The ability to idle is inhibited. In flight: • Switch to manual mode and immediately land the aircraft in a safe location. • If you are unable to maneuver in manual mode, check the safety of your surroundings and drop the aircraft immediately with the forced stop function. ➔ See Section "7.1.7 Forced Stop Using the Controller". ➔ See Section "7.1.8 Forced Stop Using the Ground Control Application"
Battery level low	The aircraft's battery level is below 13%. On ground: The ability to idle is inhibited. Replace the aircraft's battery with a fully charged battery. In flight: • Manual (MAN) or position (POS) mode Land in a safe place as soon as possible. • Auto (AUT) mode The aircraft will transition to emergency mode.
	The aircraft's battery level is below 6%. In flight: The aircraft will initiate an emergency landing on the spot. ➔ See Section "7.1.9 Low-Battery Emergency Landing"
No data from IMU	There is an error in communication between the flight controller and the IMU. Restart the aircraft. *If the warning message appears again, discontinue use and contact your dealer. On ground: The ability to idle is inhibited. In flight: There is a high possibility of a crash. Alert others and land in a safe location immediately.
Acc. data unreliable	Attitude and acceleration data quality has degraded. Restart the aircraft. *If the warning message appears again, discontinue use and contact your dealer. On ground: The ability to idle is inhibited. In flight: Immediately land in a safe location.
Gently land immediately	The battery voltage value is dropping rapidly. Avoid abrupt accelerations and land immediately in a safe location.

Warning message	Explanation and required action
Gyro data unreliable	Angular rate data quality had degraded. Restart the aircraft. *If the warning message appears again, discontinue use and contact your dealer. On ground: The ability to idle is inhibited. In flight: Immediately land in a safe location.
Altitude data unreliable	The quality of the barometric pressure data has deteriorated. Restart the aircraft. *If the warning message appears again, discontinue use and contact your dealer. On ground: The ability to idle is inhibited. In flight: Immediately land in a safe location.
ESC communication error	An abnormality in the communications between the flight controller and ESCs has occurred. Restart the aircraft. *If the warning message appears again, discontinue use and contact your dealer. On ground: The ability to idle is inhibited. In flight: There is a high possibility of a crash. Alert others and land in a safe location immediately.
Forced stop. Control lost	The aircraft has detected an abnormal attitude, indicating a loss of control. In flight: The motors will stop and the aircraft will drop. Alert people in the vicinity.
No data from batt. monitor	Data cannot be received from the battery monitor. Replace the battery. On ground: The ability to idle is inhibited. In flight: Land the aircraft in a safe place as soon as possible.
Attitude init. error	Failed to calculate the initial attitude of the aircraft at startup. Place the aircraft on a level, stable surface, and do not initiate idling until the message disappears. *Do not jostle the aircraft when starting up.
Cannot maintain altitude	Operational limits (wind speed/airframe weight) may have been exceeded. In flight: The aircraft will transition to emergency mode. ➔ See Section "7.1.4 Emergency Menu" for details. Immediately land the aircraft in a safe location.
Aircraft temperature	The aircraft's internal temperature may be about to exceed the upper or lower limit. After landing, avoid direct sunlight to cool the aircraft. On ground: The ability to idle is inhibited. In flight: Land the aircraft in a safe place as soon as possible.
ESC temperature high	The temperature of the ESC may be about to exceed the upper temperature limit. After landing, avoid direct sunlight to cool the aircraft. On ground: The ability to idle is inhibited. In flight: Immediately land the aircraft in a safe location.

Warning message	Explanation and required action
Position control disabled	There is a problem with GPS or visual odometry location information. The environment may not be suitable for flight. On ground: The ability to idle is inhibited in position (POS) or auto (AUT) mode. In flight: • Manual (MAN) mode Continuation of flight is possible. • Position (POS) mode or auto (AUT) mode Switch to manual mode and land the aircraft in a safe location as soon as possible.
No data from alt. sensor	No response from the barometric sensor. Restart the aircraft. *If the warning message appears again, discontinue use and contact your dealer. On ground: The ability to idle is inhibited. In flight: Land in a safe place as soon as possible.
Battery not secured	The battery is not locked. Check battery installation. On ground: The ability to idle is inhibited. In flight: Land in a safe place as soon as possible.
Battery temperature high	Battery temperature is elevated. Remove the battery from the aircraft and store it at room temperature. On ground: The ability to idle is inhibited. In flight: The aircraft will transition to emergency mode.
Emerg. mode (batt. load)	The load on the battery is abnormally high (Level 2). The aircraft will transition to emergency mode. ➢ If the aircraft's emergency mode behavior is set to " Hover in place indefinitely": no automatic action will be taken. ➢ Otherwise, if the warning persists when the countdown expires: The aircraft will perform a low battery emergency landing at its current location. ➔ See Section p.152 “7.1.9 Low-Battery Emergency Landing” for details. ➢ If the warning clears before the countdown expires: The aircraft will proceed to the applicable emergency landing site when the countdown expires. ➔ See Section “7.1.4 Emergency Menu” for details. Emergency mode may be cancelled by toggling the controller’s flight mode switch. Immediately land the aircraft in a safe location.

Warning message	Explanation and required action
Speed reduced (batt. load)	The load on the battery is abnormally high (Level 1). Take the following actions. • Manual (MAN) mode Climb speed is limited but horizontal speed is not limited. Decelerate immediately. If the warning persists, land the aircraft in a safe place as soon as possible. • Position (POS) mode Horizontal and climb speeds are limited. Decelerate immediately. If the warning persists, land the aircraft in a safe place as soon as possible. • Auto (AUT) mode Horizontal and climb speeds are limited. Decelerate immediately. (e.g., pause, etc.) If the warning persists, land the aircraft in a safe place as soon as possible.
Speed reduced (ESC)	Motor RPM is abnormally high (level 1). The aircraft will enforce the following restrictions for 30 seconds: • Manual (MAN) mode Climb speed is limited but horizontal speed is not limited. Decelerate immediately. ➢ If warning persists: Ascent speed is limited for 30 seconds. Decelerate. ➢ If warning ceases: Flight may continue. • Position (POS) mode Horizontal and climb speeds are limited. Decelerate immediately. ➢ If warning persists: Horizontal and climb speeds are limited for 30 seconds. Decelerate. ➢ If warning ceases: Flight may continue. • Auto (AUT) mode Horizontal and climb speeds are limited. Decelerate immediately. (e.g., pause, etc.) ➢ If warning persists: Horizontal and climb speeds are limited for 30 seconds. Decelerate (e.g., pause, etc.). ➢ If warning ceases: Flight may continue.

Warning message	Explanation and required action
Emerg. mode (ESC speed)	Motor RPM is abnormally high (level 2). The aircraft will transition to emergency mode. Immediately land the aircraft in a safe location. ➢ If motor RPM remains high, an emergency landing will occur. ➔ See Section "7.1.9 Low-Battery Emergency Landing" for details. ➢ Emergency mode may be cancelled by toggling the controller's flight mode switch. *Restriction continues. If this error occurs frequently, the aircraft is under excessive load during flight. Review your flight plan, reduce the aircraft weight, or lower the flight altitude. An airspeed limit may have been exceeded. Check the limits.
Motor wiring error (gnd.)	A motor current error was detected during idling. Repair is required. Contact your distributor.
Motor wiring error (fit.)	A motor current error was detected during flight. Land the aircraft in a safe location immediately. Repair is required. Contact your dealer.
Vision camera error	Unable to connect to an on-board stereo camera. Please restart the aircraft. Manual (MAN) mode Continuation of flight is possible. Position (POS) or auto (AUT) mode In a GPS environment, continuation of flight is possible, but forward and upward collision avoidance may not work properly. Use caution. In a non-GPS environment, switch to manual mode and land the aircraft in a safe location as soon as possible.

Warning message	Explanation and required action
Battery memory error	The battery software has detected an anomaly. Land in a safe place immediately. After landing, turn off the battery power. If the warning appears again during operation, discontinue use and contact your dealer.
Battery firmware old	Battery firmware is too old for use. Update the battery firmware. On ground: The ability to start the motors is inhibited.
Updating battery firmware	Battery firmware is being updated. Do not turn off the power until the FW update is completed.
Update error: Low battery	Battery FW cannot be updated because the battery level is less than 50%. Re-attempt the update after fully charging the battery.
Battery update failed	Battery firmware update failed. Remove the battery from the aircraft and reattach it to the aircraft to re-attempt to update. If the update fails after retrying, discontinue use and contact your dealer.
Incompatible battery	Old type of battery is used. Restart using a new battery.
Battery health error	Battery health has degraded and the remaining battery capacity (SOC) is not displayed correctly. In flight：an emergency landing will occur. ➔ See Section p.140 “7.1.9 Low-Battery Emergency Landing” for details. Battery health must be restored. Follow the procedure below to fully discharge and recharge the battery. [Procedure] Install the battery in the aircraft, press the power button, and leave it in the on state until the power turns off automatically. After that, fully charge the battery.
Takeoff denied (low temp.)	Battery temperature is too low. The ability to idle is inhibited. Wait for the battery temperature to rise before attempting a takeoff again.
Entered a no-fly area	The aircraft position is outside of a user-defined geofence or altitude limit. Check the geofence. Geofence On ground: • The ability to start the motors is inhibited.

	In flight: • In position (POS) or auto (AUT) mode, the aircraft will move toward the nearest boundary of the no-fly area at a speed of 2 m/s. • If necessary, switch to manual (MAN) mode to ensure safety. Altitude limit In flight: • The aircraft will no longer climb.

Forced landing	Forced landing is performed automatically.
	• Manual (MAN) mode
	  ○ The aircraft will descend automatically to a height of 3 m (9.8 ft) above ground level. It is still possible to control attitude and heading.
	  ○ Automatic descent stops at 3 m (9.8 ft) above ground level and full manual control is returned to the pilot.
	• Position (POS) mode
	  ○ The aircraft will descend automatically. It is still possible to control horizontal position and heading.
	  ○ When "Takeoff and landing simplified mode (POS)" is enabled, horizontal position and heading control are only possible until the aircraft descends to 0.5 m (1.6 ft) above ground level.

Compass divergence	Anomaly detected in geomagnetism or the magnetic sensor, or an abnormality related to the magnetic norm has been detected. The heading cannot be estimated correctly. Please rotate the aircraft nose by more than approximately 180°. If flight continues in this condition, position estimation errors or loss of position control may occur, and for safety reasons, the aircraft may automatically abandon position control and switch to an attitude control mode. On the ground: • Idling is not permitted in Position Mode/Auto Mode. • If equipment that may affect geomagnetism is installed or buried nearby, or suspected to be present, please move to another location. • If the standard camera has been attached/detached or optional equipment has been replaced, perform magnetic calibration.

7.1.14. Caution Messages

- The following pages list all of the caution messages that can appear in the ACSL TAKEOFF ground control application and on the controller. Also included is an explanation and required actions.
- When a warning message is issued, the controller alerts the user with sound.
  *The sound will be muted if SOUND is set to OFF in the controller settings menu.

Caution message	Explanation and required action
No market geofence data	The regional market geofence data cannot be retrieved from the aircraft's memory. In flight: • A speed limit will be imposed. Please land in a safe place as soon as possible. (This caution only occurs while in flight)
Nearing unpermitted area	The aircraft's GPS sensor is reporting that the aircraft is within 100 m (330 ft) of the regional market geofence. In flight: • A speed limit will be enforced in position (POS) and auto (AUT) mode.
Remote ID error	The on-board remote ID module has either failed or not yet completed its self-test. On ground: • The ability to start the motors is inhibited. Make sure that the mobile device that is running the ACSL TAKEOFF ground control application is equipped with a GPS, has location services enabled, and is connected properly to the controller. If the warning persists, discontinue use and contact your dealer. (This caution only occurs while on ground)
IMU self-test failure	Indicates that an abnormality has been detected in the aircraft's attitude sensor or in the operation of the controller. • Place the aircraft on a stable surface and restart it. • During takeoff, keep the roll, pitch, and yaw sticks in the center position and avoid excessive throttle operation.
Nearing motor life limit	The motors have accumulated more than 237.5 hours of operation. Contact your dealer for motor replacement. ➔ See Section "8.8 Periodic Parts Replacement."
Exceeded motor life limit	The motors have accumulated more than 250 hours of operations. Replace before further use. Contact your dealer for motor replacement. ➔ See Section "8.8 Periodic Parts Replacement."

Caution message	Explanation and required action
Entered a no-fly area	The aircraft position is outside of a user-defined geofence or altitude limit. Check the geofence. On ground: • The ability to start the motors is inhibited. • The aircraft may not have a GPS location fix due to poor GPS reception. In flight: • Approaching a no-fly area or altitude limit. A speed limit will be enforced in position (POS) or auto (AUT) mode.
GPS accuracy low	GPS accuracy is low. On ground: The ability to idle is inhibited in position (POS) or auto (AUT) mode. In flight: • Manual (MAN) mode Continuation of flight is possible. • Position (POS) mode ➔ See Section "6.2.3 Basic Position Mode (POS) Operations." • Auto (AUT) mode ➔ See Section "7.1.10 Degraded GPS Reception in Auto Flight Mode."
GPS multipath detected	There is a significant discrepancy between the position information received from the GPS receiver and the position estimated by the aircraft's inertial measurement unit. Ground: Change the location and power cycle the aircraft. In flight: Switch to manual mode and land in a safe location immediately.
Radio signal weak	The radio signal has deteriorated. Ground: Change the takeoff location and power cycle the aircraft. In flight: Switch to manual mode and land in a safe location immediately.
Radio comm. disrupted	The aircraft has failed to receive radio signals from the controller while in auto (AUT) mode. • The aircraft will enter emergency mode if no radio signals are received within the period specified by the "Allowable Transmitter Disruption Time" setting. ➔ See Section "7.1.5 Communications Disruption" *If communications are reestablished, the emergency mode can be canceled by toggling the controller's flight mode switch between modes.
Battery level low	Battery level is below 24%. In flight: Battery power is low. Continue to monitor the remaining battery level.
Battery temperature low	Battery temperature is low. Remove the battery from the aircraft and store it at room temperature.
Warm up the battery	Battery temperature is low. Please warm up the battery to room temperature.
Battery level unreliable	An abnormal battery voltage was reported by the battery. Replace the battery. On ground: The ability to idle is inhibited. In flight: Immediately land the aircraft in a safe location.

Caution message	Explanation and required action
Remote ID system error	There is a malfunction in the remote ID system. Please restart the aircraft. *If the caution message appears again, discontinue use and contact your dealer. *It is not legal to fly a UAS without a properly functioning remote ID.
No data from remote ID	No response from remote ID device. Please restart the aircraft. *If the caution message appears again, discontinue use and contact your dealer.
Remote ID firmware old	The firmware version of the remote ID Bluetooth module is out of date. Please update the firmware of the aircraft. *If the caution message appears again, discontinue use and contact your dealer.
Navigation source switched	While flying with GPS in position (POS) or auto (AUT) mode, GPS reception degraded and the aircraft switched the source of position and velocity data to visual odometry. OR While flying without GPS in position (POS) or auto (AUT) mode, GPS reception improved and the aircraft switched the source of position and velocity data to GPS. ➔ See Section "6.2.3 Basic Position Mode (POS) Operations." ➔ See Section "6.2.4 Basic Auto Mode (AUT) Operations."
RTK not available	Use caution. The ability of the RTK-SOTEN module to receive GNSS signals has degraded and the aircraft has switched to the standard onboard GNSS receiver. Positioning may be unreliable.

Caution message	Explanation and required action
No data from GPS	There is an error in communication between the flight controller and the GPS sensor. Restart the aircraft. *If the caution message appears again, discontinue use and contact your dealer. On ground: The ability to idle is inhibited in position (POS) or auto (AUT) mode. In flight: • Manual (MAN) mode Continuation of flight is possible. • Position (POS) mode ➔ See Section "6.2.3 Basic Position Mode (POS) Operations." • Auto (AUT) mode ➔ See Section "7.1.10 Degraded GPS Reception in Auto Flight Mode."
Compass unreliable	The quality of the magnetometer (magnetic compass) data has deteriorated. *If the caution message appears again, discontinue use and contact your dealer. On ground: Not recommendable to take off in position (POS) or auto (AUT) mode. In flight: Switch to manual mode and land in a safe location as soon as possible.
No data from compass	There is an error in communication between the flight controller and the magnetometer (magnetic compass). Restart the aircraft. *If the caution message appears again, discontinue use and contact your dealer. On ground: Not recommendable to take off in position (POS) or auto (AUT) mode. In flight: Switch to manual mode and land in a safe location as soon as possible.
Compass divergence	An inconsistency between the readings from the magnetometer (magnetic compass) and the motion of the aircraft has been detected. This may indicate magnetic interference from objects in the environment, that the magnetometer (magnetic compass) is faulty, or that compass calibration is needed. On ground: • Taking off in position (POS) or auto (AUT) mode is not recommended. • Perform magnetic field calibration when a camera is switched or optional equipment is added or removed. • If none of the above apply, flying in position (POS) or auto (AUT) mode in the area is not recommended. In flight: Switch to manual mode and land in a safe location as soon as possible.
Do a 360 rotation	Magnetic interference is continuously being detected, or position control is disabled. Please rotate the aircraft once. Magnetic calibration will be performed.
Home position unknown	Displayed when the Home location is unknown at takeoff, when GPS location estimation starts, or during Go Home operation. ➔ See Section "6.3.7 Go Home." In flight: Abort Go Home and switch to another mode.

Caution **message**	Explanation and required action
No data from GCS	There is no communication between the ACSL TAKEOFF ground control application and the aircraft. Check the connector connection between the mobile device and the controller. • Manual (MAN) or position (POS) mode Continuation of flight is possible. • Auto (AUT) mode Switch to position mode and promptly land in a safe location.
No data from dist. sensor	There was an error in communication between the flight controller and a distance sensor. Upward obstacle detection, upward obstacle avoidance, and/or soft-landing assist may not function properly.
Throttle control saturated	Operational limits (wind speed/airframe weight) may have been exceeded. In flight: Reduce speed and land in a safe location as soon as possible.
Aircraft temperature	The aircraft's internal temperature may be about to exceed the upper or lower limit. After landing, avoid direct sunlight to cool the aircraft. On ground: Not recommendable to take off. In flight: Land the aircraft in a safe place as soon as possible.
Position drift increasing	Operational limits (wind speed) may have been exceeded. In flight: Reduce speed and land in a safe location as soon as possible.
Position estimation error	There is a problem with GPS or Visual-Odometry position information. On the ground: The ability to start the motors is inhibited in position (POS) or auto (AUT) mode. In flight: • Manual (MAN) mode This will not affect manual flight so continuation of flight is possible. • Position (POS) mode The aircraft will automatically transition to manual mode. • Auto (AUT) mode Flight will continue with inaccurate position information; switch to manual mode as necessary.
Speed reduced (high winds)	Operational limits (wind speed) may have been exceeded. • Auto (AUT) mode There is a possibility that the aircraft may not have enough remaining battery charge to reach its destination. Check the remaining battery level and determine whether or not to continue the flight.
Collision avoidance active	An obstacle is detected near the aircraft. On ground: The ability to idle is inhibited in position (POS) or auto (AUT) mode. In flight: Keep a safe distance from obstacles.

Caution message	Explanation and required action
Radio not responding	There is an error in communication between the aircraft and the controller. On ground: Restart the aircraft and controller. In flight: Land the aircraft in a safe place as soon as possible. • Manual (MAN) or position (POS) mode If the communications error persists, the aircraft will transition to emergency mode. • Auto (AUT) mode If the signal from the controller cannot be received, the system will enter emergency mode after the time set in "Acceptable radio lost link time (AUT) [sec]" has elapsed. ➔ See Section "7.1.4 Emergency Menu" for details. *When radio wave interruption is restored, the emergency mode can be canceled by switching the mode switch of the controller to another mode.
Forced pause (hover)	While flying in auto mode, GPS reception was poor and switched to visual odometry. Please switch to Position or Manual mode and land the aircraft in a safe place as soon as possible. ➔ See Section "6.2.4 Basic Auto Mode (AUT) Operations." *When switched to visual odometry, free flight, Go Home and other operations are not available. *The forced pause function does not work with active marker tracking.
Propeller not detected	The ESC has detected that the motor does not have a propeller (propeller). All motors should be equipped with a propeller.
Battery temperature high	Battery temperature is elevated. Remove the battery from the aircraft and store it at room temperature. On ground: Not recommendable to take off. In flight: Land in a safe place as soon as possible.
Nearing battery life limit	The number of times the battery has been charged and discharged is approaching the limit of use. Contact your dealer for battery replacement.
Bad flight plan	There is an abnormality in the received planned flight. Please review the planned flight. • Reduce the number of waypoints • Check for unassigned emergency landing points.
Obstacle detected	An obstacle near the aircraft is detected. Fly with caution.

Caution message	Explanation and required action
No data from vision unit	The flight controller is not receiving any data from the vision computer. If the caution persists, restart the aircraft. *If the caution message appears again, discontinue use and contact your dealer. On ground: The ability to idle is inhibited in position (POS) or auto (AUT) mode in a non-GPS environment. In flight: • Manual (MAN) mode Continuation of flight is possible. • Position (POS) mode In a non-GPS environment, switch to manual (MAN) mode and land the aircraft in a safe location as soon as possible.
Vision accuracy low	This environment is not suitable for visual odometry. ➔ See Section "2.3.2 Overview of the Visual System." On ground: The ability to idle is inhibited in position (POS) or auto (AUT) mode in a non-GPS environment. In flight: • Manual (MAN) mode Continuation of flight is possible. • Position (POS) mode or Auto (AUT) mode In a non-GPS environment, switch to manual (MAN) mode and land the aircraft in a safe location as soon as possible.
Too dark for vision	There is not enough light for the stereo cameras to capture properly exposed images and some functions may not work properly. Manual (MAN) mode Continuation of flight is possible. Position (POS) or auto (AUT) mode Forward and upward collision avoidance may not work in GPS environments. Use caution. In a non-GPS environment, switch to manual mode and land the aircraft in a safe location as soon as possible.

Caution message	Explanation and required action
Vision camera restarted	Vision has a low frame rate. Please restart. On ground: The ability to idle is inhibited in position (POS) or auto (AUT) mode in a non-GPS environment. In flight: -Manual mode Continuation of flight is possible. -Position mode/Auto mode In a non-GPS environment, switch to manual mode and land the aircraft in a safe location as soon as possible.
No camera SD card	No SD card was detected in the camera. Make sure an SD card is inserted in the camera Format the SD card.
SD card format error	The filesystem format on the SD card format is not supported. Reformat the SD card using the supported filesystem format.
Camera lens error	There is a problem with the focus/zoom function of the camera. Please power off the aircraft, reinsert the camera, then power the aircraft back on. *Do not reinsert the camera while the aircraft is powered on. *If the caution message appears again, discontinue use and contact your dealer.
Gimbal init. error	Gimbal initialization failed. Please power off the aircraft, reinsert the camera, then power the aircraft back on. *Do not reinsert the camera while the aircraft is powered on. *After the aircraft is powered on, initialization of the gimbal will begin. Please make sure that there are no obstacles or other objects that may interfere with the gimbal initialization. *If the caution message appears again, discontinue use and contact your dealer.
Gimbal motor error	An abnormality has occurred in the gimbal motor. Please power off the aircraft, reinsert the camera, then power the aircraft back on. *Do not reinsert the camera while the aircraft is powered on. *If the caution message appears again, discontinue use and contact your dealer.
Gimbal control error	An abnormality has occurred in the gimbal motor. Please power off the aircraft, reinsert the camera, then power the aircraft back on. *Do not reinsert the camera while the aircraft is powered on. *If the caution message appears again, discontinue use and contact your dealer.
Route calculation failed	A geofence is located along the Go Home or emergency landing route, and automatic route generation has failed. The system will switch to D-pad control mode.

7.1.15. Advisory Messages

- The following pages list all of the advisory and informational messages that can appear in the ACSL TAKEOFF ground control application and on the controller. Also included is an explanation and required actions.

Advisory message	Explanation and required action
Camera connected	No camera is detected. Attach a camera.
Takeoff denied	Not ready for automatic takeoff. • Verify that GPS accuracy is good. • Verify that throttle stick is in the center position. • Verify that communication between the controller and the aircraft has not been disrupted.
Saving aircraft settings	One or more settings values in the aircraft's internal memory has been changed and is being reloaded.
Camera heat warning	Camera temperature is rising. Stop shooting. After landing, avoid direct sunlight and lower the temperature of the camera. *If the warning message appears again, discontinue use and contact your dealer.
Too many controllers bound	More than 3 controllers have been bound to the aircraft. Reset the controller bindings using the TAKEOFF ground control application.
Waiting	Displayed during the waiting period of the current waypoint, as specified in the flight plan.
Log write failure	Failed to write to the aircraft's internal log. Restart the aircraft. *If the warning message appears again, discontinue use and contact your dealer.
Easy landing	Landing in Easy takeoff and landing Mode (POS only).
Deleting bindings	Deleting the binding information between the aircraft and the controller.
Aircraft powering down	Shutting down the aircraft.
Calculating autonomous route...	A geofence is located along the Go Home or emergency landing route, and the shortest detour route is being automatically generated. Please wait.

Advisory message	Explanation and required action
Calibration in progress	During planned flight, magnetic interference has been detected, and the aircraft is automatically performing magnetic calibration while rotating 360°. Please wait.
Calibration complete	Magnetic calibration has been completed. The aircraft will hover in place for 30 seconds in standby mode. If the Resume button is pressed during standby, the planned flight will resume. After landing, be sure to stop the motors.
GPS switched to RTK	The RTK-SOTEN module has become the source for GNSS position data. Note that this does not necessarily mean that RTK corrections are being applied to the GNSS position data.

7.1.16. Messages Displayed on the Controller

Warning messages

- The following lists all of the warning messages that can appear only on the controller. Also included is an explanation and required actions.
- When a warning message is issued, the controller alerts the user with sound and vibration.
  * The sound will be muted if SOUND is set to OFF in the controller settings menu.

Warning message	Explanation and required action
STICK FAILURE	A controller stick malfunction was detected. Discontinue use and contact your dealer. On ground: Not recommendable to take off. In flight: Immediately land the aircraft in a safe location.
COMM. FAILURE	An abnormality in the radio has been detected. Discontinue use and contact your dealer. On ground: Not recommendable to take off. In flight: Immediately land the aircraft in a safe location.
TRAINING COMM. ERROR	An abnormality has occurred with the training radio. Discontinue use and contact your dealer. On ground: Not recommendable to take off. In flight: Immediately land the aircraft in a safe location. (Only for controllers equipped with a 920 MHz radio, Japan only)
PLEASE CHARGE CONTROLLER	The controller's battery level is below 5%. On ground: Not recommendable to take off. In flight: Immediately land the aircraft in a safe location.
CONTROLLER TEMP. HIGH	The controller's internal battery temperature is too high. Allow it to cool down immediately. On ground: Not recommendable to take off. In flight: Immediately land the aircraft in a safe location.
STICKS NOT CENTERED	Make sure the left and right sticks are in the center position.
BINDING FAILED	Binding failed. Reattempt binding.
CONTROLLER BATTERY LOW	Controller battery voltage is low. Charge the battery or, if it is cold, bring it up to the appropriate temperature.
DISCONNECT DRONE	Communication with the aircraft has been lost.
BATTERY LEVEL LOW	The aircraft's battery level is below 13%.
	The aircraft's battery level is below 6%. See Section "."

Warning message	Explanation and required action
EMERGENCY STOP	The aircraft has been forcibly stopped.
NO COMM WITH PARTNER	In Training Mode, the communication link between the sub-controllers (Instructor–Student) has been lost. Control authority is delegated to the instructor. → See Section "6.5 Lesson Mode (Japan only)."

Caution messages

- The following lists all of the warning messages that can appear only on the controller. Also included is an explanation and required actions.
- When a warning message is issued, the controller alerts the user with sound and vibration.

  * The sound will be muted if SOUND is set to OFF in the controller settings menu.

Warning message	Explanation and required action
PLEASE CHARGE CONTROLLER	The controller's battery level is below 10%. On ground: Not recommendable to take off. In flight: Find a possible landing site and land the aircraft in a safe place as soon as possible.
CONTROLLER TEMP. HIGH	The controller's internal battery temperature is high. Allow it to cool down as soon as possible.
TEMP. LOW (NO CHARGING)	Controller temperature has dropped below the operating temperature range. Warm up the controller. When charging: When this message is displayed, charging is stopped to protect the battery.
CONTROLLER INACTIVE	The controller has been inactive for an extended period of time.
CHARGER COMM. ERROR	A communication error between the battery and charger has occurred. If this occurs more than once even after replacing the charger, contact your dealer.
TRAINING COMM. ERROR	An abnormality has occurred with the training radio. Discontinue use and contact your dealer. On ground: Not recommendable to take off. In flight: Immediately land the aircraft in a safe location. (Only for controllers equipped with a 920 MHz radio, Japan only)
WARM UP THE BATTERY	Battery temperature is low. Please warm up the battery to room temperature.
BATTERY LEVEL LOW	The aircraft's battery level is below 24%. → See Section "7.1.14 Caution Messages." (P.168)
TEACHER CONTROL	In Training Mode, the teacher is currently in control.
STUDENT CONTROL	In Training Mode, the student is currently in control.

Advisory messages

- The following lists all of the advisory messages that can appear only on the controller. Also included is an explanation and required actions.

Advisory message	Explanation and required action
IDLE OPERATION	Idling.
ESTABLISHING CONNECTION	A communication connection is being prepared between the aircraft and the controller. When a radio fail-safe occurs, this message is displayed on all bound controllers that have successfully reconnected with the aircraft.
TO BE PILOT PUSH ENTER	Press and hold the ENTER button to obtain pilot authority. → See Section "5.5.2. Confirm Controller Binding." → See Section "6.4.2 Fail-Safe when Multicasting."
RELEASING PILOT AUTH.	This message is displayed on the pilot's controller when releasing pilot authority by simultaneously pressing the Enter and Pause buttons. When this occurs, the aircraft will immediately begin recruiting for a new pilot and a notification will appear on all controllers that are currently receiving telemetry from the aircraft in observer mode.
REQUESTING PILOT AUTH.	This message is displayed when attempting to gain pilot authority by pressing the Enter button when the message "TO BE PILOT PUSH ENTER" is displayed on the controller. The aircraft checks the order of the requests and grants pilot privileges to the controller with the earliest request.
SNAP SHOT	Still image shooting in progress.
RECORD START	Video recording in progress.
RECORD STOP	Video recording has stopped.
SDP : 7.2V 1.00A	The device is charging.

Chapter 8

Maintenance, Inspection and Disposal

8.1. Post-Flight Inspection 182
8.2. Post-Flight Battery Inspection 183
8.3. Post-Flight Aircraft Inspection 184
8.4. Post-Flight Propeller Inspection 185
8.5. Post-Flight Controller Inspection 186
8.6. Storage 187
8.7. Periodic Inspection, Repair and Maintenance 189
8.8. Periodic Parts Replacement 191
8.9. Product Transfer 192
8.10. Disposal and Recycling 193

8.1. Post-Flight Inspection

- Perform the following inspections after each flight.
- When flying, dust, insects, pollen, and other microscopic debris adhere to the aircraft. If left unattended, these particles can cause chemical changes that lead to deterioration and discoloration of parts.
- To prevent these problems, clean and care for the equipment after each flight, and check each part for stains, damage, or wear.

1. Post-flight battery inspection

- Clean battery 8-2-1
- Confirm level of charge 8-2-2
- Inspect exterior 5-2-2

2. Post-flight aircraft inspection

- Clean aircraft 8-3-1
- Inspect exterior ..... 5-3-1.
- Inspect battery terminals and locking mechanism 5-3-2
- Inspect camera terminals and locking mechanism 5-3-3
- Inspection air intake 5-3-4
- Inspect motors 5-3-5
- Inspect propeller mounts and arms 5-3-6
- Inspect arm locking mechanisms 5-3-7
- Inspect stereo cameras and infrared sensors 5-3-10

3. Post-flight propeller inspection

- Clean propellers 8-4-1
- Inspect propellers 5-4-1

4. Post-flight controller inspection

- Clean controller 8-5-1
- Confirm level of charge 8-5-2

8.2. Post-Flight Battery Inspection

WARNING

If the battery has experienced a severe impact, there is a risk of it swelling or self-igniting. In such cases, discontinue its use immediately, place it in a fire-safe place away from flammable materials and ensure it has stabilized before proceeding further.

CAUTION

If any abnormality is found during the battery inspection, do not install it onto an aircraft or attempt to charge it. Contact your dealer.

8.2.1. Clean Battery

- Wipe the battery clean with a soft, slightly damp cloth.

ADVISORY

- Water splashed onto the battery terminals may cause a malfunction. Do not pour water directly onto the battery.
- Only clean the battery with it removed from the aircraft.

8.2.2. Confirm Level of Charge

- Ensure that the battery has a level of charge that is suitable for storage. Refer to Section A-1-1 Specifications.

8.3. Post-Flight Aircraft Inspection

CAUTION

- If the aircraft experiences a crash or other impact during flight, do not attempt to fly it again. Contact your dealer.
- If any abnormality is found during the aircraft inspection described in the following pages, do not attempt to fly it. Contact your dealer.

8.3.1. Clean Aircraft

- Wipe the dirt off each part of the fuselage with a soft, slightly damp cloth.

ADVISORY

- Water splashed onto electrical components may cause malfunction. Do not pour water directly onto the aircraft.
- Only clean the aircraft with the battery removed.

8.4. Post-Flight Propeller Inspection

CAUTION

- If the aircraft experienced a crash or other impact during flight, discontinue the use of all propellers that were installed. Separate them from propellers that are in good conditions, and dispose of them.
- If any abnormality is found during the propeller inspection, do not use them for flight. Contact your dealer.

8.4.1. Clean Propellers

- Wipe the propeller clean with a soft, slightly damp cloth.

ADVISORY

Only clean the propellers when they are removed from the aircraft.

8.5. Post-Flight Controller Inspection

CAUTION

- If the controller is dropped or experiences impact during use, discontinue use and contact your dealer.
- If any abnormality is found during the controller inspection described in the following pages, discontinue use. Contact your dealer.

8.5.1. Clean Controller

- Wipe the controller clean with a soft, slightly damp cloth .
- In particular, do not allow moisture or dust to remain on the moving parts of the antenna.

8.5.2. Confirm Level of Charge

- Ensure that the controller is in the recommended storage condition as described in Section A-1-1 Specifications.

8.6. Storage


- Ensure that the aircraft, battery, and controller are in the recommended condition for storage, as described in Section 8.1: Post-Flight Inspection.

Battery Self-Discharge Function

For a battery with level of charge greater than 50%, pressing and holding the power button for 10 seconds will initiate storage mode. The battery will begin to self-discharge until its level of charge reaches 50%, at which the battery will enter shutdown mode.

➔ See • p.34 "2.6.3 Battery Control Mode".

LED display in storage mode

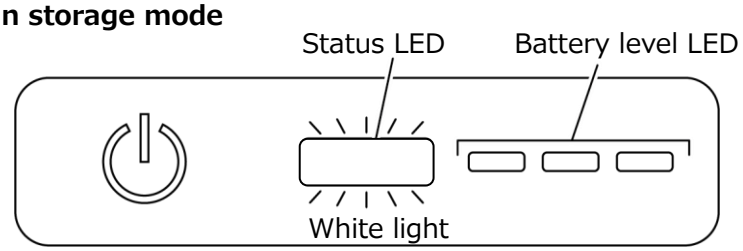

ADVISORY

- To return to sleep mode while in storage mode, press and hold the power button for 3 seconds.
- To return to sleep mode from shutdown mode, connect the battery to a charger.

- In addition to the recommended storage temperatures listed in Section A-1-1 Specifications, avoid storage locations with a fire hazard, high humidity, dust, and weak shelving.
- To prevent theft, store the aircraft, batteries, and controller in separate, lockable locations.

CAUTION

- The batteries include a built-in battery management system (BMS) that continuously monitors the conditions of the internal lithium-ion cells. If the battery is left in a high-temperature environment, such as the inside of a car on a hot sunny day, with full charge, the battery management system may sense an overcharge condition and engage a safety lock, rendering the battery unusable.
- If the aircraft is dropped or experiences a shock during storage, contact your dealer.
- During discharge in storage mode, the battery may warm up to about body temperature (approximately 35 °C). Therefore, avoid discharging it in an enclosed space.

ADVISORY

- To maximize battery life, it is recommended to store batteries with around 50% charge.
- Storage at low battery levels is effective in reducing battery degradation. However, over-discharge can also cause battery degradation. The built-in battery management system (BMS) continuously consumes a small amount of energy causing the batteries to discharge very slowly over time. If the BMS detects an extreme over-discharge condition it may engage a safety lock, rendering the battery unusable. If it is known in advance that the device will not be used for an extended period (three

months or more), fully charge the battery once, then use the battery self-discharge function and store the device in shutdown mode.

- When storing in shutdown mode, it is recommended to charge the battery every six months. If storage is to be continued, charge the battery, then use the self-discharge function again after full charge to return the device to shutdown mode.
- Store batteries disconnected from the aircraft.
- If batteries are stolen, promptly file a report with the local police and contact your dealer.


8.7. Periodic Inspection, Repair and Maintenance

- To maintain maximum performance, it is recommended that periodic inspections be performed on the aircraft and controller.
- At the time of repair or periodic inspection, the SOTEN Diagnostics Tool is used at a designated maintenance facility to check the accumulated flight time and inspect the functions of onboard equipment to identify areas in need of overhaul or repair.
- Please consult your dealer for periodic inspections.

ADVISORY


- Repair or replacement of parts may be necessary following regular inspections. Repair or replacement of parts will only be done in consultation with the customer.
- If, upon inspection, it is found that the battery is no longer usable, an inspection report will be submitted to the customer and it will be disposed of as industrial waste.

SOTEN Repair, Periodic Inspection, and Maintenance (Summary)

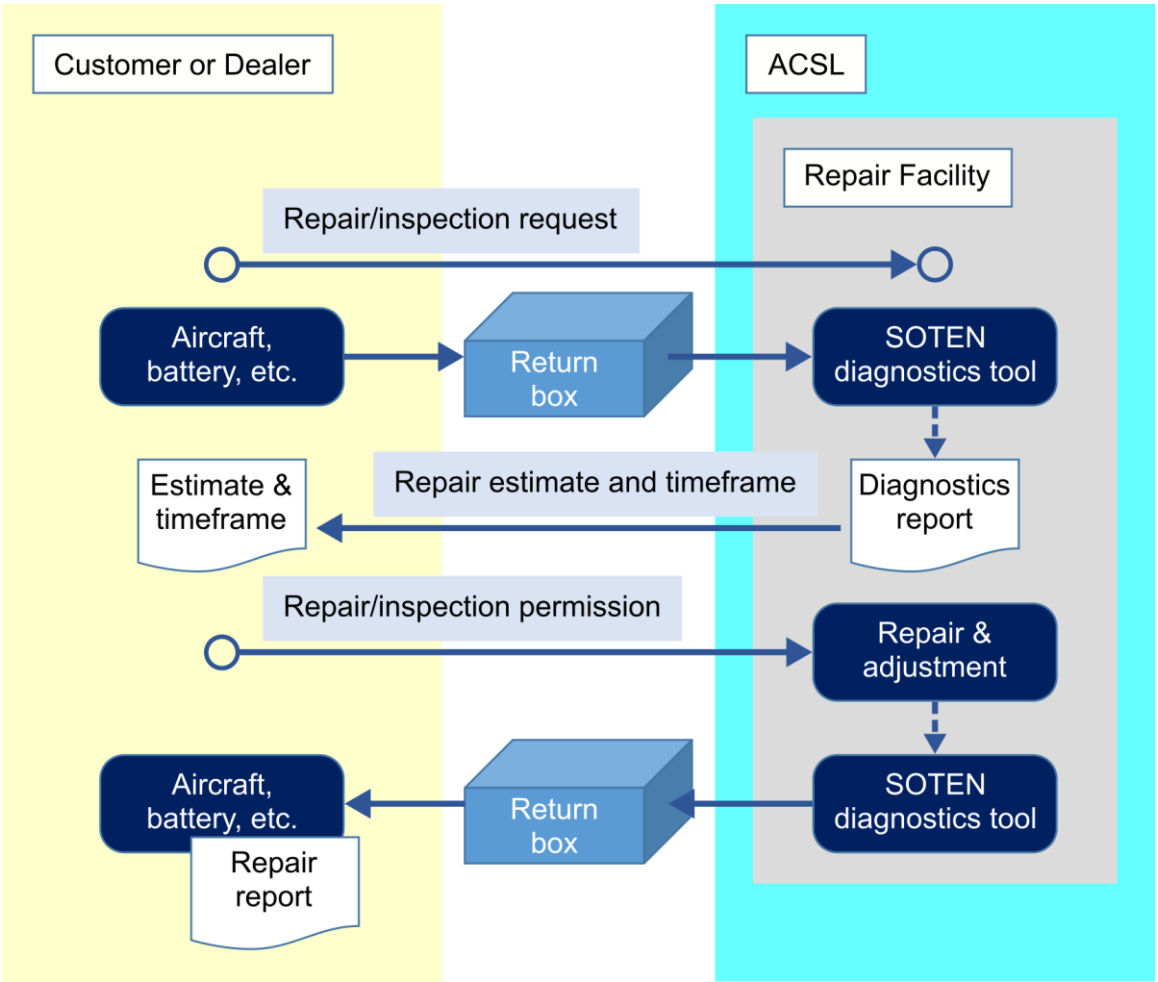

Shipping SOTEN for Repair, Periodic Inspection and Maintenance

- When shipping an aircraft for repair or inspection, please ship the aircraft and parts in a storage case or return box (see photo below).
- When shipping an aircraft for defect analysis, we ask that you mark it with a sticky note or similar item so that we can identify the battery that was in use at the time the defect occurred.
- Following the occurrence of abnormal behavior, do not repeatedly turn the aircraft on and off. S hip the aircraft as soon as possible.

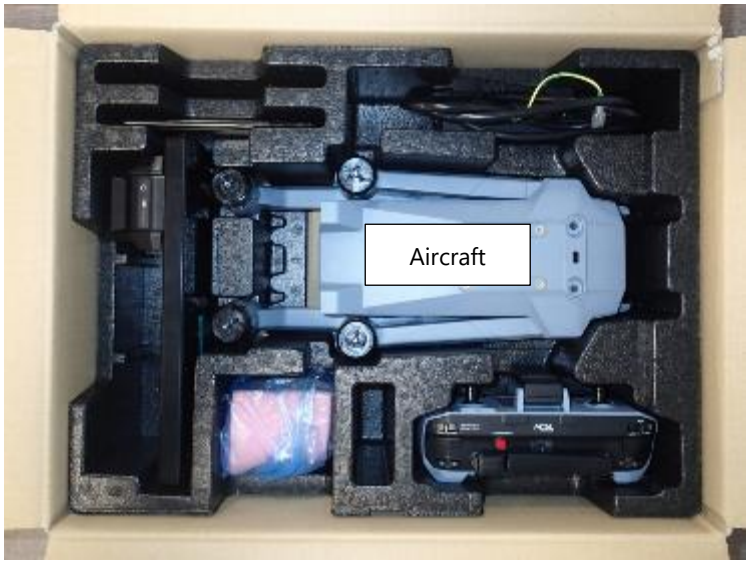

WARNING

If the battery is cracked or otherwise damaged, it cannot be shipped because it could cause a fire or other accident while in transit. Dispose of the battery yourself in accordance with the battery disposal rules at your location.

CAUTION

After experiencing a severe impact, such as a crash, there is a risk of fire or other hazards if the aircraft is powered on. Promptly power off the aircraft and refrain from powering it on again. Contact your dealer.
In addition, repeatedly powering the aircraft on and off following a malfunction could lead to the on-board flight logs of the malfunction event, which are necessary for analysis, to be overwritten, making it difficult for ACSL to determine the cause of the malfunction.

ADVISORY

- When shipping SOTEN, remove the battery and camera from the aircraft.
- When shipping the aircraft in the carrying case, do not place additional components such as batteries in the excess space around the aircraft. There is a risk that they may knock together and cause damage to each other.
- If there are batteries, cameras, or other items that cannot fit in the carrying case, forcing them in may result in damage to these items or to SOTEN. Prepare separate packaging for these items.
- For third-party equipment, such as an anemometer, do not include them in the shipment as they may be lost. Keep such items under your own management and supervision.

8.8. Periodic Parts Replacement

- For safe use, the aircraft should be properly cared for and parts should be replaced periodically. Replacement parts should be periodically replaced in accordance with the following standards.
- Replace parts based on total flight hours or date of purchase, whichever comes first.

Replacement Parts	Total flight time	From the date of purchase
Motors	250 hours	3 years
Propeller	250 hours	3 years
Propeller mounting base	250 hours	3 years

WARNING

Failure to perform the periodic replacement of parts, as specified in this section, may result in risk of in-flight malfunction or crash.

8.9. Product Transfer

- If you wish to transfer this product to a third party, please contact your dealer.
- After the transfer of this product, after-sales support, including the notification of urgent service bulletins, will be provided to the new customer through your distributor.
- Since this product is an industrial unmanned aircraft, ACSL will not provide any after-sales support if the product is transferred to an individual customer.
- For operators in the US, upon transfer of the aircraft to a new owner, the previous owner must remove the registration number label from the aircraft and the new owner must re-register the aircraft themselves.



Transfer of this product to criminal entities is prohibited.

8.10. Disposal and Recycling

ADVISORY

When this product is disposed of, it is classified as industrial waste. If the product is improperly dumped or disposed of as general waste, you will be subject to punishment according to the local regulations.

8.10.1. Disposal of airframe and controller

- When disposing of the aircraft and controller, please dispose of them properly as industrial waste.

8.10.2. Battery Disposal and Recycling

- Batteries that have been involved in a crash or strong shock, or that have been submerged, damaged, or have swollen should be disposed of properly by the customer according to the disposal method specified by the local government in your area.
- Please contact your dealer for recycling of used batteries.
- For a battery that has been safety-locked, contact your dealer. A functional inspection will be performed at an authorized maintenance facility to determine whether the battery should be repaired or disposed of or recycled. In the case of disposal or recycling, a diagnostic report will be issued to the customer and the battery will be disposed of properly.

CAUTION

The transportation of batteries that have been subjected to a crash or severe shock, or batteries that have been submerged in water, damaged, or swollen, should only be done upon consultation with the carrier.

Chapter 9

Troubleshooting

9.1. Troubleshooting 195

9.1. Troubleshooting

This section describes troubleshooting actions for common problems. If you do not find a problem listed below, or if the problem persists, contact your dealer. Do not attempt to fly the aircraft until the problem has been resolved.

9.1.1. Aircraft Troubleshooting

Issue	Action
The aircraft has fallen or crashed.	Stop flying and contact your dealer. Information on inspections of the aircraft will be provided.
The BIND button cover has come off.	The waterproofing and dustproofing performance is degraded. Discontinue use and contact your dealer for repair.
No power to the aircraft.	Replace the battery.
The aircraft status LED blinks red for more than 5 minutes in a GPS environment.	Move the aircraft to a location with more unobstructed sky.
The aircraft status LED blinks red in non-GPS environment.	Move the aircraft to a location with a wall or ceiling surfaces within 3 m (10 ft) of the aircraft and restart it.
Cannot start the motors.	• Ensure that the controller is bound to the aircraft and that pilot authority has been gained. • Perform stick calibration according to "7.1.12 Stick Calibration."
Cannot start the motors. (position (POS) or auto (AUT) mode)	Move the aircraft to a location where the status LED on the aircraft does not flash red.
Strange noise when starting the motors.	Turn the motor by hand and check for foreign objects or snagging.
Certain motors do not rotate.	Discontinue use and contact your dealer for repair.
Can't take off.	Operate the controller throttle above the center position.
Cannot take off automatically. (auto (AUT) mode)	• Set the controller flight mode switch to the "AUT" position. • Complete the preflight checklist on the ACSL TAKEOFF ground control application. • Ensure that the throttle stick is in the center position.

Issue	Action
Aircraft shakes when hovering. (manual (MAN) mode)	Land the aircraft and check for any abnormalities in the aircraft, arms, or propeller attachments.
Aircraft shakes when hovering in a GPS environment. (position (POS) auto (AUT) mode)	• Ensure that there are no objects on or around the aircraft that may interfere with the geomagnetic compass. • Move the aircraft to a location with more unobstructed sky. • Turn off the collision avoidance switch on the controller.
Aircraft shakes when hovering in a non-GPS environment, (Position mode/Auto mode)	• Move the aircraft to a location with a wall surface within 3 m in front of the aircraft and restart it. • Turn off the collision avoidance switch on the controller.
Cannot go straight or turn right or left. (position (POS) auto (AUT) mode)	If there are any objects on or around the aircraft that may interfere with the geomagnetic compass, discontinue the flight.
The speed is too slow. (position (POS) mode)	The aircraft may have switched to visual odometry as a result of poor GPS reception. The notification “Navigation source switched” is displayed when the aircraft switches from GPS to visual odometry.
I can’t land. (manual (MAN) mode)	• This product uses a barometric pressure sensor for altitude control. Changes in air pressure near the ground, etc., may affect throttle operation. • Select auto-landing on the controller or ACSL TAKEOFF ground control application.
I can't land. (position (POS) mode)	• This product uses a barometric pressure sensor for altitude control. Changes in air pressure near the ground, etc., may affect throttle operation. • Select auto-landing on the controller or ACSL TAKEOFF ground control application.
Can't auto-land.	• Check that the controller status LED is solid green and that the notification “Radio comms interrupted” is not displayed. • Land it in position (POS) mode or manual (MAN) mode.

9.1.2. Controller Troubleshooting

Issue	Action
The controller does not respond when plugged into a USB charger.	• Check if the controller temperature is appropriate. • The charging port is located on the bottom of the controller. Connecting a charger to the data communication port on the top of the controller will not recharge the battery. • Try a different USB charger. • If the problem persists, contact your dealer.
Charging is not complete after a long period of time.	If this occurs even after replacing the charger, contact your dealer.
Controller housing section is bulging. There is a strong chemical odor.	Do not touch the controller with your bare hands. Temporarily place the controller in a fire-safe location that is as far away as possible from flammable materials, buildings, or crowded places, and away from rainwater or other water sources. If you have an explosion-proof case, temporarily store the controller in the explosion-proof case.
The controller was dropped and the casing was damaged/deformed. The controller was submerged in water. Seawater splashed onto the controller.	There is a possibility that the controller could start to smoke or catch fire. Temporarily place the controller in a fire-safe location that is as far away as possible from flammable materials, buildings, or crowded places, and away from rainwater or other water sources. If you have an explosion-proof case, temporarily store the controller in the explosion-proof case.
The controller is submerged in seawater	If the controller behaves strangely, do not force it out of the seawater. It is extremely dangerous.

9.1.3. Battery Troubleshooting

Issue	Action
The battery does not respond at all when plugged into a charger.	If you have more than one battery, check that the charger is not defective. If the charger is defective, contact your dealer immediately.
The status LED is lighting or flashing in a pattern not described in this manual	Please contact your dealer as soon as possible.
The safety lock has engaged. ➔ See Section "2.6.3 .Battery Modes"	The battery's internal battery management system (BMS) has determined that the battery is no longer safe for continued use. This battery will no longer power on. The cause of the safety lock can be diagnosed by an authorized maintenance facility. For more information, contact your dealer.
The battery is swollen.	Do not touch the battery with your bare hands. Temporarily place the battery in a fire-safe location that is as far away as possible from flammable materials, buildings, or crowded places, and away from rainwater or other water sources. If you have an explosion-proof case, temporarily store the battery in the explosion-proof case.
There is a strong chemical odor.	Do not touch the battery with your bare hands. Temporarily place the battery in a fire-safe location that is as far away as possible from flammable materials, buildings, or crowded places, and away from rainwater or other water sources. If you have an explosion-proof case, temporarily store the battery in the explosion-proof case.
The battery has been submerged in water.	There is a possibility that the controller could start to smoke or catch fire. Do not touch the battery with your bare hands. Temporarily place the battery in a fire-safe location that is as far away as possible from flammable materials, buildings, or crowded places, and away from rainwater or other water sources. If you have an explosion-proof case, temporarily store the battery in the explosion-proof case.
Seawater splashed onto the battery.	There is a possibility that the controller could start to smoke or catch fire. Do not touch the battery with your bare hands. Temporarily place the battery in a fire-safe location that is as far away as possible from flammable materials, buildings, or crowded places, and away from rainwater or other water sources. If you have an explosion-proof case, temporarily store the battery in the explosion-proof case.
The battery is submerged in seawater.	If the battery behaves strangely, do not force it out of the seawater. It is extremely dangerous.

9.1.4. RTK-SOTEN (option) Troubleshooting

Situation	Corrective Action
The RTK icon does not appear in TAKEOFF after connecting RTK-SOTEN to the aircraft, or the RTK tab is not displayed in the Settings menu.	• Verify that TAKEOFF is version 2.4.1 or later and the aircraft (Nx) firmware is version 1.2.25 or later. • Restart the aircraft and reconnect the RTK-SOTEN unit. If the issue persists after performing the above steps, contact your dealer.
The RTK icon is red.	The RTK-SOTEN unit is not receiving GNSS signals. • Make sure the aircraft is outdoors with an unobstructed view of the open sky.
A red exclamation mark remains over the RTK icon.	The RTK-SOTEN unit is not receiving any RTK correction data. • In TAKEOFF, open **Settings > RTK** and confirm that the correction data source settings have been entered correctly and that the input fields are grayed out.
A yellow exclamation mark remains over the RTK icon.	The RTK-SOTEN unit is receiving RTK correction data but is not able to compute a precise position fix. • Verify that the aircraft is outdoors with an unobstructed view of the open sky.
The USB cable becomes loose easily.	A disconnected cable during flight may result in a crash. Do not fly the aircraft. Contact your dealer.
The silicone boot has come off the cable.	Flying without the silicone boot may allow water or dust to enter the aircraft's USB port and may also increase the risk of cable disconnection during flight, potentially resulting in a crash. Do not fly the aircraft. Contact your dealer.

Appendix A

A-1 Specifications 201
A-2 Change History 210

A-1 Specifications

A-1-1 Specifications

Aircraft		
Model		L2A (without LTE)
Dimensions	When arms are extended	Overall length 560 mm / width 637 mm / height 153 mm (Overall length 22.0" / width 25.1" / height 6.0") (including propellers)
	Arms retracted	Overall length 363 mm / width 162 mm / height 144 mm (Overall length 14.3" / width 6.4" / height 5.7")
Weight (without battery or camera)		L141 (without LTE): approx. ≈ 1,050 g (2.31 lbs) L221 (equipped with LTE): ≈ 1,070 g (2.36 lbs)
Number of propellers		4
Maximum takeoff weight		2,000 g (4.41 lbs)
Flight time	High capacity battery	29 minutes (conditions: without standard camera, wind speed 8 m/s)
Altitude limit		2,000 m (6,560 ft)
Ingress protection rating		IP43 (with camera, gimbal and battery installed) *Flying in the rain is not recommended.
Operating environment temperature		-20 to 40°C (-4 to 104°F) *Conditions apply for use in low-temperature environments.
Obstacle detection system		Stereo cameras: 3 directions (forward, upward, downward)
Laser distance sensor		Class 1 laser equipment
External power supply capability		USB type-C® 5V 500mA or less *Since the aircraft is electrically connected to the internal system, it may be affected by external equipment. In principle, please do not feed power to external devices during flight.

Controller	
Built-in battery nominal voltage	7.2 V
Rated current capacity	5,000 mAh
Rated energy capacity	36.0 Wh
Dimensions	194 mm x 129 mm x 84 mm (7.6″ x 5.1″ x 3.3″)
Weight	≈ 500 g (1.1 lbs)
Mobile device port	USB 2.0 Full Speed
Charging standards	USB BC (Battery Charging Specification 1.2)
Rated voltage for charging	5 V
Maximum charging current *1	• SDP standard charger max 5 V 0.5 A • CDP standard charger max 5 V 1.5 A • DCP standard charger max 5 V 1.5 A • Standard charger, etc. max 5 V 2.4 A • Chargers not applicable to the above max 5 V 1.0 A
Maximum charging power *1	• SDP standard charger max 2.5 W • CDP standard charger max 7.5 W • DCP standard charger max 7.5 W • Standard charger, etc. max 12.0 W • Chargers not falling under the above max 5.0 W
Recommended charging temperature (ambient)	0 to 40°C (32 to 104°F)
Recommended operating temperature (ambient)	0 to 40°C (32 to 104°F)
Recommended storage temperature (ambient)	Less than 3 months: -10 to 45°C (14 to 113°F) More than 3 months: -10 to 20°C (14 to 68°F), no condensation
Recommended storage conditions	Battery level: ≈ 30% Ambient temperature: ≈ 20°C (68°F) Humidity: ≈ 45%
Only models equipped with a 920 MHz training radio (Japan only)	
Training radio frequency band	920.6 to 927.8 MHz (L-band) 928.15 to 929.65 MHz（H band)
Training radio power (EIRP)	1.2 mW (L band) 0.8 mW (H-band)
Japan technical standards compliance certification	001-A11789

Controller	
Maximum transmission distance between training radios *2	100 m (330 ft) (open area with no radio interference and good visibility)

High-Capacity Battery (aircraft)	
Nominal voltage	23.1 V
Maximum charge voltage	26.4 V
Rated current capacity	4,075 mAh
Rated power capacity	94.1 Wh
Dimensions	Overall length 107 mm / width 75 mm / height 53 mm (Overall length 4.2″ / width 3.0″ / height 2.1″)
Weight	≈ 480 g (1.1 lbs)
Approximate charging time	≈ 2 hours (indoors at 25°C)
Ingress protection rating	IP43 (The terminal should not get wet by water or condensation.)
Chargeable temperature (internal temperature)	0 to 45°C (32 to 113°F)
Recommended charging temperature (ambient)	0 to 40°C (32 to 104°F)
Recommended operating temperature (ambient)	0 to 40°C (32 to 104°F)
Recommended storage temperature (ambient)	Ambient temperature 0 to +35°C (-22 to +140°F) 0 to 35°C (32 to 95°F), no condensation
Recommended storage conditions	Battery level: ≈ 50% (first two battery level indicator LEDs lit)
Normal charging (3.0 A)	Pack internal temperature: +5 to +45°C (41 to 113°F)
Low speed charging (0.8 A)	Pack internal temperature: 0 to +5°C (32 to 41°F)

Battery Charger	
Voltage	100 to 240V, 2A, 50 to 60Hz
Rated output	26.4V @ 3A, 5V @ 2A 33.6V @ 2.4A, 5V @ 2A, 90W total maximum

Wireless Communications	
Controller	
Communication frequency band	2,412 to 2,477 MHz
Power	0.009 W/MHz
Bandwidth	14 channels, 5 MHz spacing
Modulation	G1D
Encryption	AES256
Japan technical standards compliance certification	Aircraft: 001-X00399 Controller 001-X00400
Specified radio equipment type (Japan)	Article 2, Paragraph 1, Item 19 of the Certification Regulations 2.4GHz Band Advanced Small Power Data Communication System
Maximum transmission distance *2	4 km (2.5 miles), line-of -sight (open area with no radio interference and good visibility)
Bluetooth	
Bluetooth Version	Bluetooth 4.0 and 5.0
Japan technical standards compliance certification	001-A14398
Maximum transmission distance *2	300 m (1,000 ft), Bluetooth 5.0
Remote ID standard	ASTM F3411-22A Broadcast Type

1 The values may vary depending on the compatible standard and power supply capacity of the charger used to supply power. Please check the user manual of the charger used.

2 The maximum transmission distance is the transmission distance under favorable conditions and does not guarantee performance under actual operating conditions. It depends on the surrounding radio environment, line-of-sight conditions, and the orientation of the controller.

RTK-SOTEN（Optional）	
Dimensions	74.4 mm × 74.0 mm × 72.3 mm *Excluding USB cable and protruding parts*
Weight	107g
Operating Temperature	-20～40°C
RTK Positioning Accuracy*1	Vertical：1cm + 1 ppm Horizontal：1cm + 1 ppm
Hovering Accuracy (RTK Enabled)*1, *2	Vertical：±0.1m Horizontal：±0.1m
Supported GNSS	GPS、Galileo、QZSS
Supported Correction Data Format	RTCM 3.2 MSM5


*1 Specifications are based on operation under favorable GNSS reception conditions (e.g., unobstructed sky view and minimal multipath effects).


*2 Specifications are based on operation under conditions free from external disturbances such as wind.


A-1-2 Dimensions

Aircraft

Unit: mm

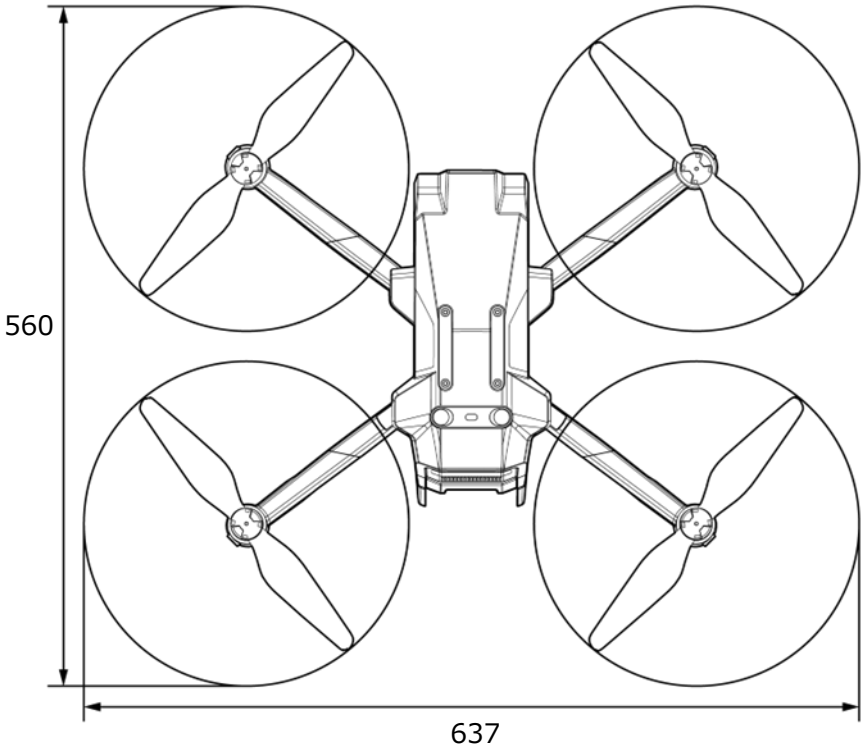

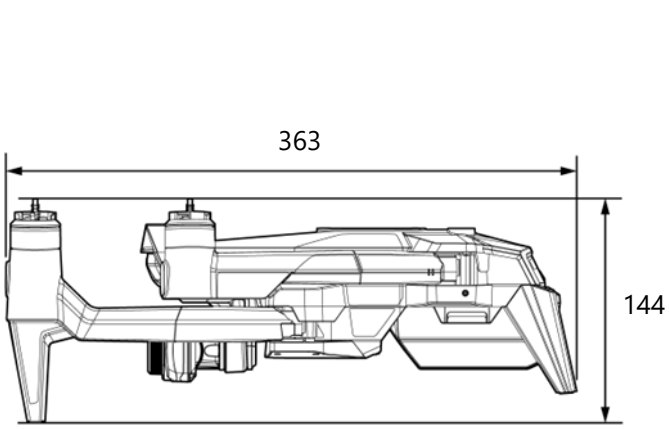


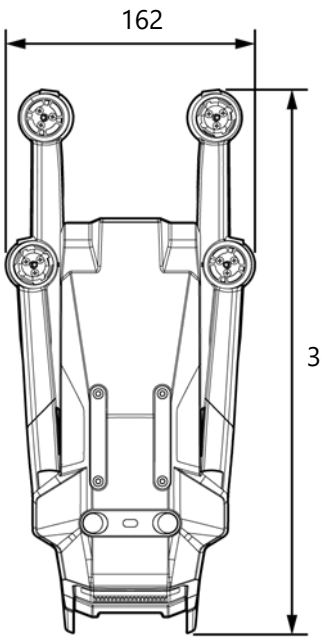

Battery


Unit: mm

High-capacity battery

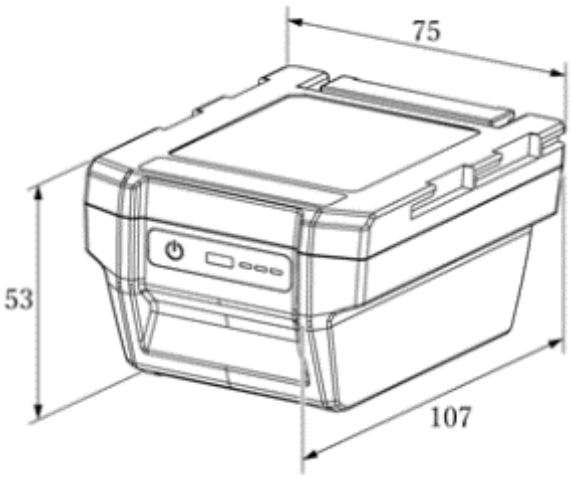


Controller

Unit: mm

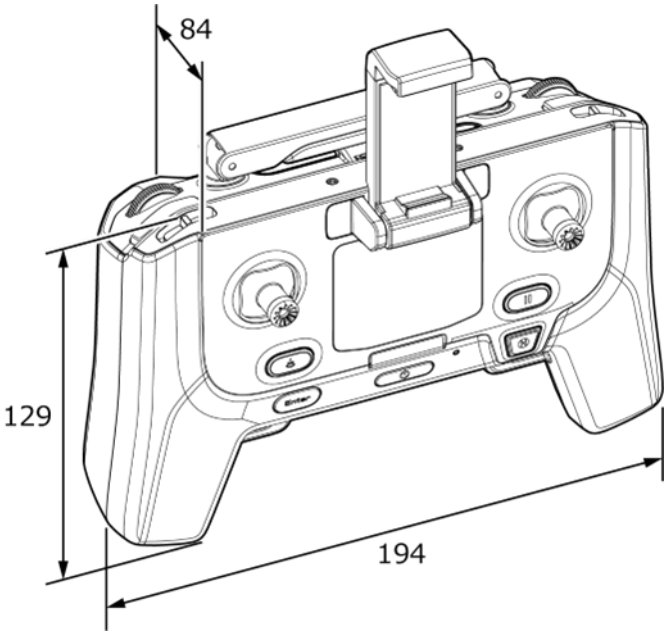

RTK Module(Option)

Unit: mm

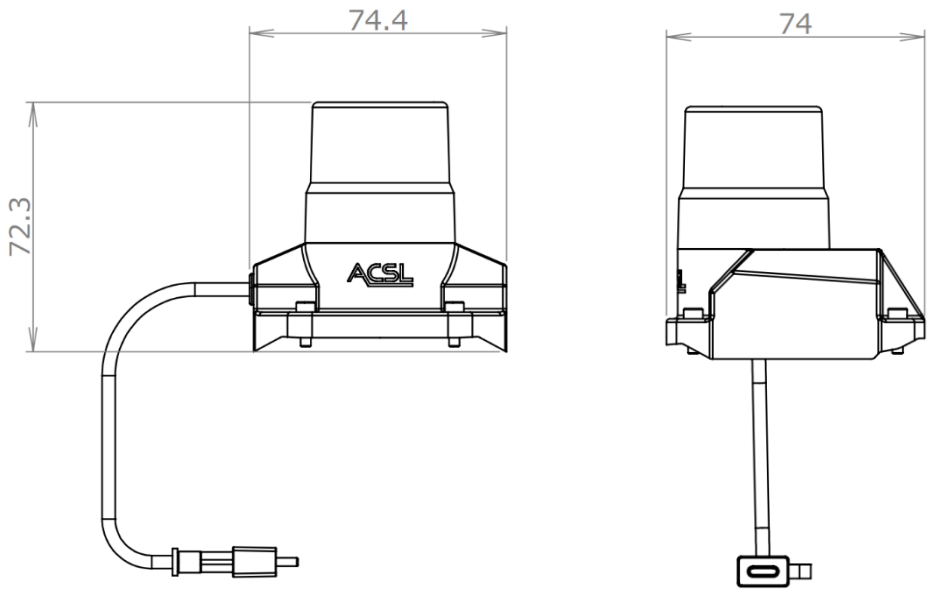

A-2 Change History

Version	Date	Details of Revision	Editor
2.11-US1	5/30/2024	First edition	ACSL Ltd. Production Unit
3.7-US1	8/29/2025	- Reflected activation of downward light function - Added navigation method for controller system settings screen - Added details to magnetic heading check procedure - Reflected partial specification changes for Go Home function - Reflected user interface updates - Revised some warning/caution/notification messages and reflected specification changes - Reflected updates to controller messages - Added precautions for long-term battery storage - Corrected typographical errors	ACSL Ltd. Production Unit
3.8-US1	4/22/2026	- Added a function of automatic magnetic calibration during flight in auto mode - Removal of stick position requirement when switching from auto mode - Added a function of automatic geofence bypass route generation - Revised some warning/caution/notification messages and reflected specification changes - Corrected typographical errors	ACSL Ltd. Production Unit
3.9-US1	6/19/2026	- Added RTK-SOTEN(Option)	ACSL Ltd. Production Unit
3.10-US1	10/13/2026	- Added a Caution message - Corrected typographical errors	ACSL Ltd. Production Unit

Manufacturer Information

Manufacturer

ACSL Ltd.
Hulic Kasai Rinkai Bldg. 2F
3-6-4 Rinkai-cho, Edogawa-ku
Tokyo 134-0086, Japan

For individual questions, please contact the distributor listed on the back cover of this manual.

Specifications are subject to change without notice due to product improvement.

First edition May 2024

Distributor Contact